



NOTES: UNLESS OTHERWISE SPECIFIED
1. FOR GENERAL SERIES SPECIFICATIONS,
SEE SD60-0000 (TYPE N) & SD35-0000 (SMA).

2. MATERIAL SPECIFICATIONS:
CONTACT: BERYLLIUM COPPER
LOCK WASHER & NUT: STAINLESS STEEL
INSULATOR: PTFE
ALL OTHER METAL PARTS: BRASS

3. FINISH SPECIFICATIONS:
CONTACT: GOLD
LOCK WASHER & NUT: PASSIVATED
ALL OTHER METAL PARTS: NICKEL

4. ELECTRICAL SPECIFICATIONS
IMPEDANCE: 50 OHMS
FREQUENCY RANGE: DC - 6.0 GHz
VSWR: 1.05:1 MAX DC - 4.0 GHz
1.10:1 MAX 4.0 TO 6.0 GHz

5. PANEL NUT AND LOCK WASHER SHIPPED LOOSE.

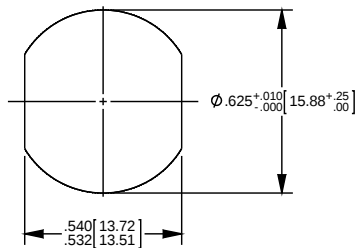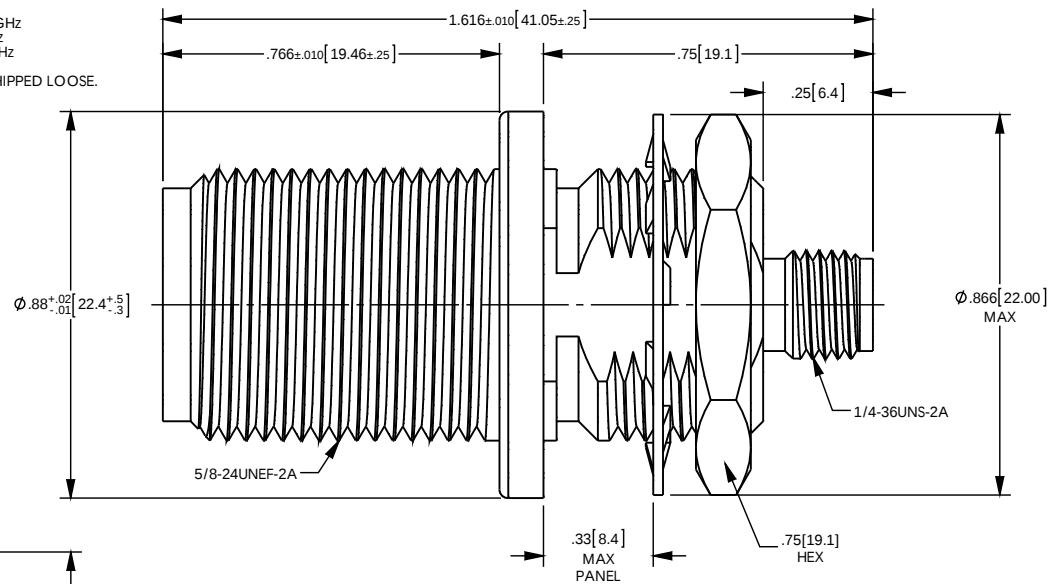

RECOMMENDED PANEL CONFIGURATION

CATALOG P/N: 934AN205

PER ASME Y14.5M-1994
UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES (MM)
TOLERANCES:
DECIMAL: .XX [XX] ± .01 [0.3]
XXX [XXX] ± .005 [0.13]
XXXX [XXXX] ± .0005 [0.013]
ANGLES: ± 2° SCALE: 3:1

CUSTOMER
SALES DRAWING



DRAWN	DATE	APPROVED	DATE
J	10/21/2015	J	10/22/2015
APPROVED	DATE	APPROVED	DATE
DCAM	10/22/2015	XXX	XX/XX/XX



by WINCHESTER Winchester Electronics Corporation
199 Park Road Ext Suite 104
Middlebury, Connecticut 06762

SMA JACK TO N JACK
50 OHM ADAPTER (RoHS)

A	SD934AN205	SHT	OF	REV
		1	1	A