


THIS IS A CONTROLLED DOCUMENT AND IS SUBJECT TO CHANGE
CONTACT ENGINEERING DEPARTMENT FOR LATEST REVISION

DWG. NO. 351-074-0044H

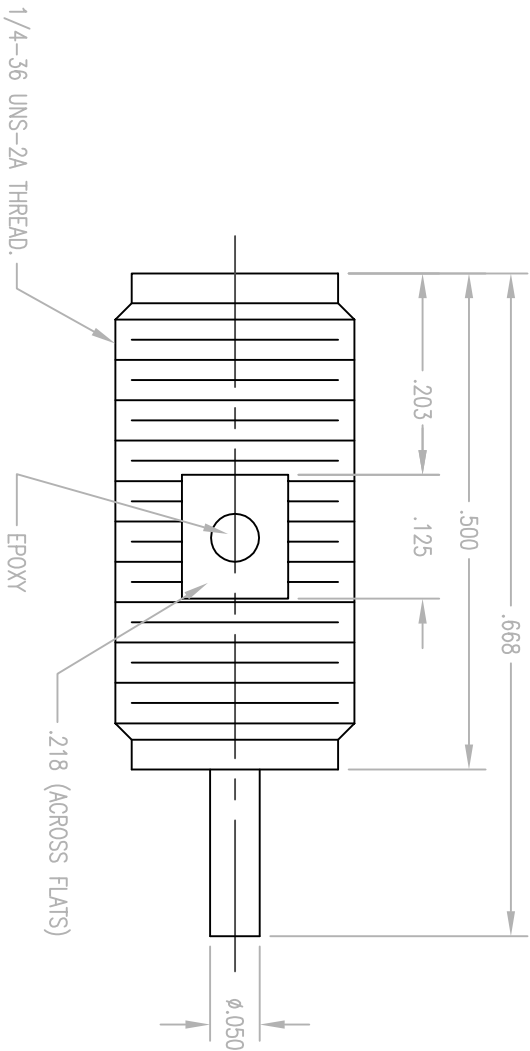

NOTES:

1. MATERIAL:
INSULATOR: TEFLON, PER ASTM D1710
CENTER CONTACT: BERYLLIUM COPPER, PER ASTM B196
BODY: BRASS, PER ASTM B16
2. FINISHES:
CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER
.000050 MIN. NICKEL PER QQ-N-290.
BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER
.000050 MIN. NICKEL PER QQ-N-290.
3. ELECTRICAL:
IMPEDANCE: 50 OHMS

THIS INFORMATION IS PROPRIETARY AND CONFIDENTIAL. IT IS DISCLOSED TO YOU ON
CONDITION NO FURTHER DISCLOSURE IS MADE TO OTHER THAN RETCONN PERSONNEL
WITHOUT WRITTEN AUTHORIZATION FROM RETCONN INC., TORRINGTON, CT.

REV.	DESCRIPTION OF CHANGE	DATE	DRN	APPR
-	RELEASE PER NPR 457	06/17/97	CHRS	

UNLESS OTHERWISE SPECIFIED
TOLERANCES: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.010
FRACTIONS ±1/64 ANGLE ±2°
ALL DIMENSIONS PRIOR TO PLATING
CHAMFER 1ST THREAD 45° TO ROOT DIAMETER
REMOVE ALL BURRS AND SHARP EDGES
ALL DIAMETERS TO BE CONCENTRIC WITHIN .003 TIR
SURFACE FINISH SHALL BE 63 MICRONS MAXIMUM
DIMENSIONS IN INCHES DO NOT SCALE PRINT

REV.	DESCRIPTION OF CHANGE	DATE	DRN	APPR
-	RELEASE PER NPR 457	06/17/97	CHRS	
REVISIONS				
FINISH				
DRAWN				
DATE				
CHECKED				
SCALE				
FSOM				
ODW4				
REV.				
-				

SALES DRAWING

RETCONN
A SUBSIDIARY OF SPM
199 W. PEARL ROAD
TEL (860) 499-1220 FAX (860) 499-7307

SMA JACK FEED-THRU TERMINAL