

## ASSEMBLY&INSTALLATION

Please read carefully and save these instructions, as you may need them a later date.

### CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

### GENERAL

All electrical connections must be in accordance with local and National Electrical Code(N.E.C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.


## ASSEMBLY AND INSTALLATION

- Carefully unpack the fixture, lay out all parts on a clean surface.
- Securing the rods: screw rod A (1) onto bushing A (2). Screw bushing B (3) into rod A (1). Screw bushing C (4) into rod B (5). Attaching the rod C (6) to the canopy (7), screw rod C (6) onto bushing D (8).
- Mount the mounting bracket (9) to the outlet box (10) by using two outlet box screws (11). Make sure the threads of the mounting screws (19) are facing out when the mounting bracket (9) is attached to the outlet box. Make sure the threads of the mounting screws (19) are facing out.
- Tie the ground wires (12) from fixture and from outlet box to the ground screw (13) on the mounting bracket (9). Connect the white fixture wire (14) from the fixture to the white wire (neutral wire 15) from the supply circuit. Connect the black fixture wire (16) from the fixture to the black wire (live wire 17) from the supply circuit.
- Cover the connections by using provided wire connectors (18). Position wires back inside the outlet box.
- Place the canopy (7) over the outlet box (10). Align the mounting screws (19) so that they protrude through the appropriate holes on the canopy (7). Screw the lock nuts (20) onto the mounting screws (19).
- Place the glass shade (21) over the socket (22). Screw the socket ring (23) onto the socket (22).

## ASSEMBLY AND INSTALLATION (CONT.)

- Install the bulb (not included 24). Use 60-watt max. medium-base bulb.
- Turn on the power.

## INSTALLATION IS NOW COMPLETED

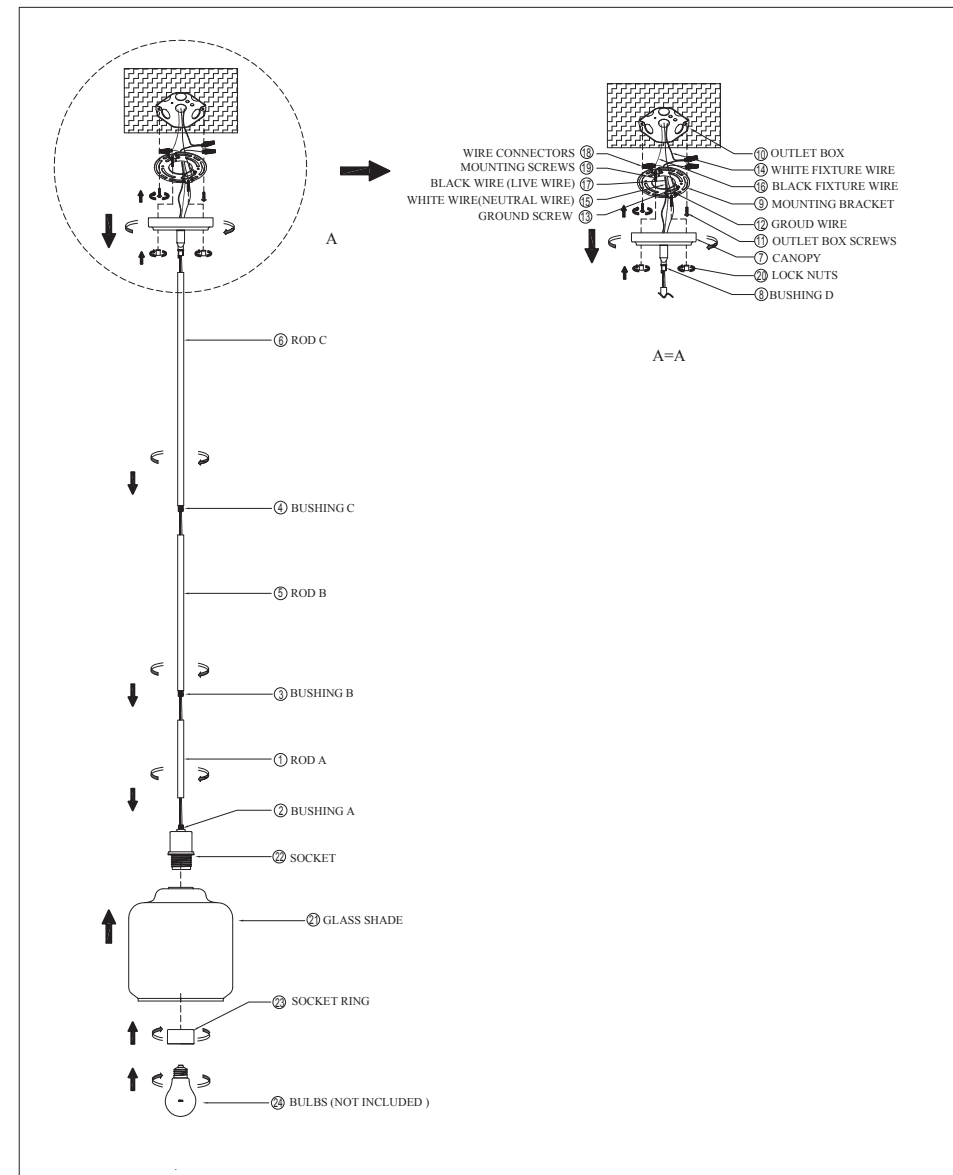

ITEM NO.: 46901