

# INSTALLATION AND SAFETY INSTRUCTIONS

## FOR ITEM NO:214102

### FOR YOUR SAFETY

**WARNING:**BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF:ETHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS SHUT OFF

### GENERAL

You don't need special tools to install this fixture  
Be sure to follow the steps in the order given. Under on circumstances should a fixture be hung on house electrical wires nor should a swag type heating system.Read instructions carefully  
If you are unclear as to how to proceed, consult a qualified electrician

**NOTE:**Proper wiring is essential for the safe operation of this fixture

### FIXTURE ASSEMBLY

Carefully removed the fixture from the carton and check that all parts are included as shown in figure. Be careful to misplace any of the screws or parts, which are needed to install this fixture

### INSTALLATION

**STEP 1:** Remove cap finial (F) from mounting screws(Q), Attach round mounting plate(C) with outlet box screws (D) to outlet box (A).

**STEP 2:**Pull out the source wires from the outlet box(A)

Make wire connections using wire nuts(B)as following

-- Connect the ribbed wire (W/O marking) or white wire from light to White wire from power source.

--Connect the smooth wire (W marking) or black wire from light to Black wire from power source.

--Attach the ground wire to mounting plate(C) secured with ground screw (R) . Connect it to the house ground wire with the wire nut (B)

Carefully tuck the wires back into the outlet box.

**STEP 3:** Raise the Canopy (E) to the Outlet box(A), then secure it to round mounting plate (C) by mounting screws (Q) with the cap finial (F).

**STEP 4:** Install bulb (bulb not included)

Make sure they do not exceed the maximum wattage specified on the fixture's wattage rating label.


**STEP 5:** Raise the nipple (I) to the hex nut on the Canopy (E) , Align the hole in the glass shade (H) to nipple (I),then secure it with rubber washer (J) .steel washer (K) by hex nut (U),then lock it.

**STEP 6:** Raise the cap (V) to the nipple (H) , then secure it with finial (W).

### CLEANING

To clean, Wipe fixture with a soft and dry cloth.  
Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

Line art shown may not exactly match the fixture enclosed.  
However,the installations do apply to this fixture item on:**214102**

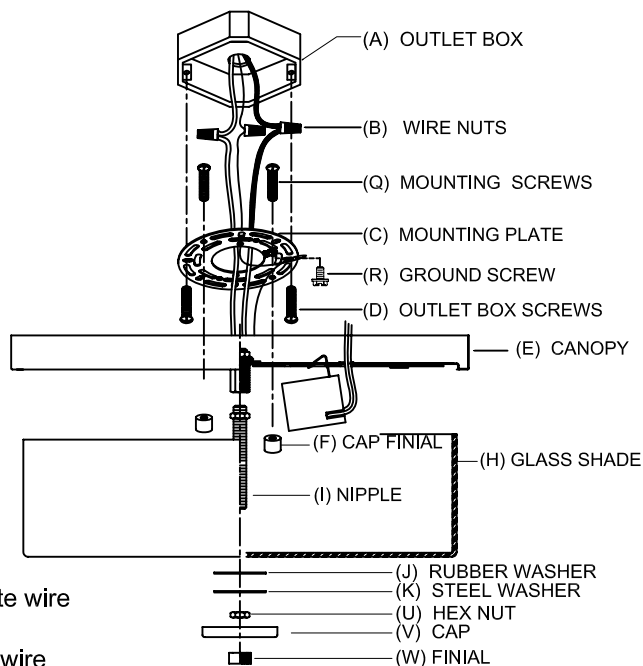

warning: Need to check if the glass is perfect before assembling