


DWG. NO.		350-511-0000H	
REV	DESCRIPTION	BY DATE	APPD
A	RELEASE PER ECR 7357	JWH 5/28/02	JWH

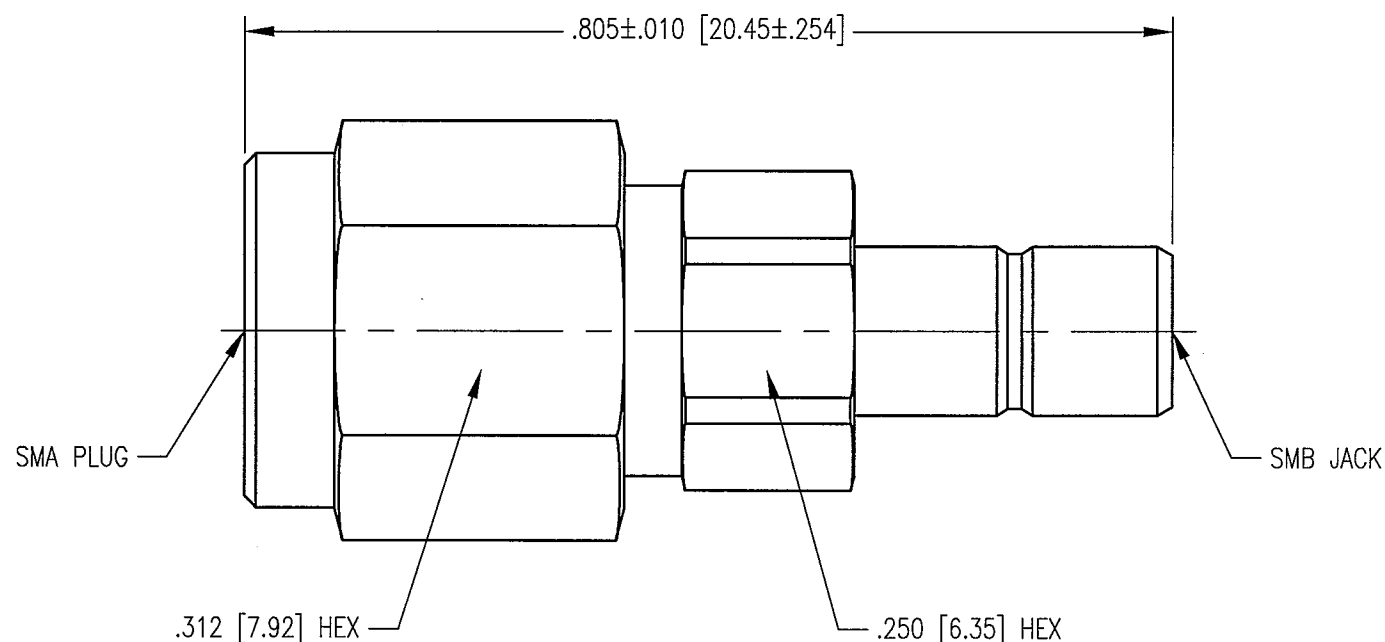

NOTES:

1. MATERIALS:

CONTACT: COPPER ALLOY
RETAINING RING: BERYLLIUM COPPER PER ASTM B194
ALL OTHER METAL PARTS: BRASS PER ASTM B16
INSULATOR: TEFLON PER ASTM D1710
GASKET: SILICONE RUBBER PER ZZ-R-765

2. FINISH:

CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER
.000050 MIN. NICKEL PER QQ-N-290
BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER
.000050 MIN. NICKEL PER QQ-N-290
COUPLING NUT: .000005 MIN. GOLD PER MIL-G-45204 OVER
.000050 MIN. NICKEL PER QQ-N-290

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM]		NORTHROP GRUMMAN	
TOLERANCES: DECIMALS .XX ± .01 [0.254] .XXX ± .005 [0.127] ANGLES ± 2°		SCALE: 6:1	
CUSTOMER DRAWING		TITLE SMA PLUG TO SMB JACK ADAPTOR	
DRAWN JWH	DATE 3/5/02	CHECKED KJT	DATE 3/5/02
APPROVED JEM	DATE 3/5/02	APPROVED JED	DATE 3/5/02
A		350-511-0000H	
SHT. 1		OF 1	
REV. A			