

### Features

- Single-stage filtration and absorption system
- Reduces Chlorine Taste & Odor, Chloramine, Particulate Class I, Lead, Asbestos, Cyst, Mercury, Turbidity, and select Pharmaceuticals. See Performance Data Sheet for individual contaminants and reduction performance
- Includes K-77687 Aquifer single replacement cartridge
- Filter head automatically turns off the water supply when cartridge is removed
- 0.85 gpm maximum flow rate at 60 psi
- Eco-friendly coconut shell-based carbon filter
- Recommended use with the Wellspring® beverage and Carafe® kitchen faucets

### Material

- High-impact plastic construction

### Installation

- Quarter-turn twist cartridge for easy installation and replacement

### Recommended Products/Accessories

K-77687 single replacement filter cartridge




### Codes/Standards

CSA B483.1  
NSF/ANSI 42  
NSF/ANSI 53  
NSF/ANSI 401  
NSF Protocol P473  
IAPMO Certification

### KOHLER® Water Filter Systems Five-Year Limited Warranty

See website for detailed warranty information.

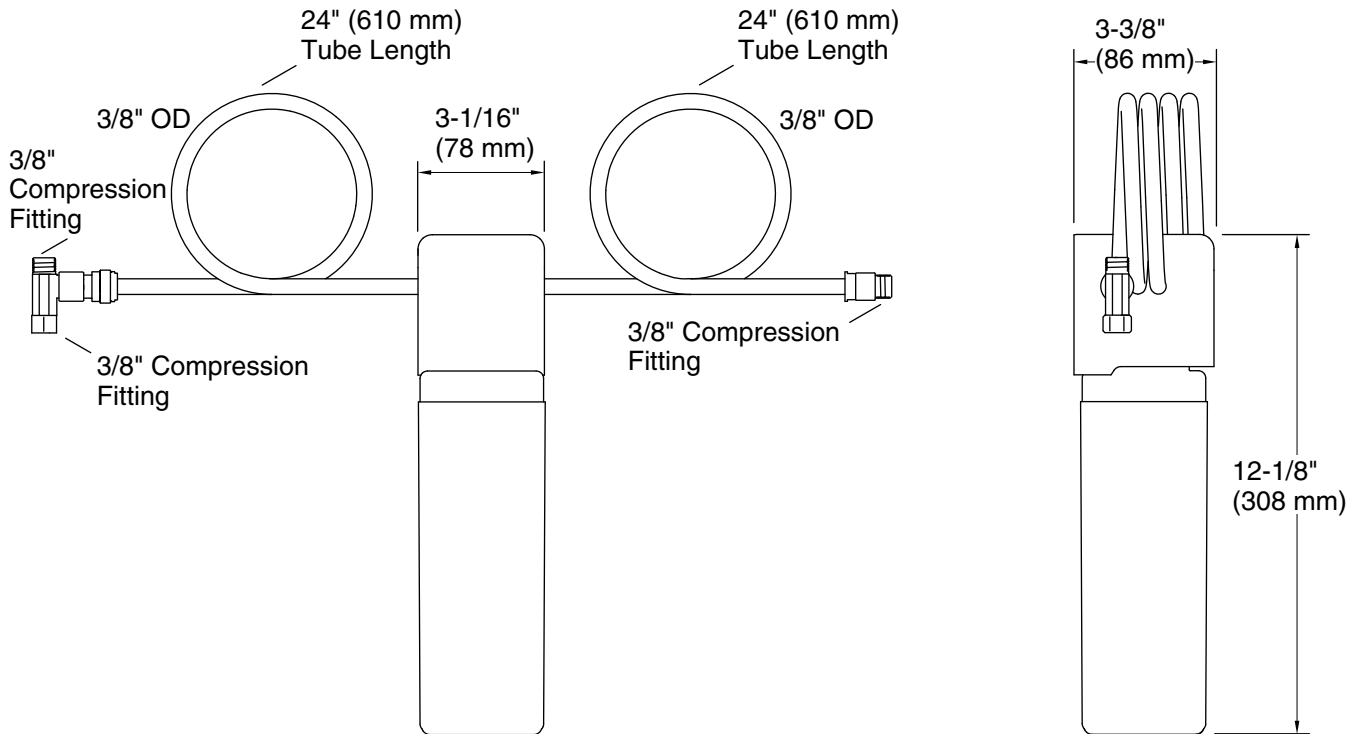

## Technical Information

All product dimensions are nominal.

### Faucet:

Flow rate: 0.85 gal/min (3.2 l/min)

Pressure: 60 psi (4.1 bar)

## Notes

Install this product according to the installation guide.

To prevent the risk of property damage, protect from freezing.

For cold water use only.

To ensure the filter continues to reduce contaminants effectively, it is recommended that the filter gets replaced every 6 months.

Application guideline/water supply parameters:

Water Pressure: 40-120 psi (276-827 kPa)

Water Temperature: 33-100°F (0.5-37.8°C)

Capacity: 389 gal (1,472 L)