

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL SPECIFICATION:

BODY: BRASS PER ASTM B16

RETAINING RING: BERYLLIUM COPPER PER ASTM B194

2. FINISH SPECIFICATION:

BODY: .000030 MIN. GOLD PER ASTM B488 OVER


.000050 MIN. NICKEL PER QQ-N-290

RETAINING RING: .000100 MIN. NICKEL PER QQ-N-290


3. THIS DIMENSION CAN BE .150" MAX AFTER TIN DIP.

REV	DESCRIPTION	BY DATE	APPD
E	REVISED PER ER7306	CWB 04/14/08	CWB

$\phi .175 \pm .002 [4.45 \pm .05]$



RECOMMENDED
MOUNTING HOLE

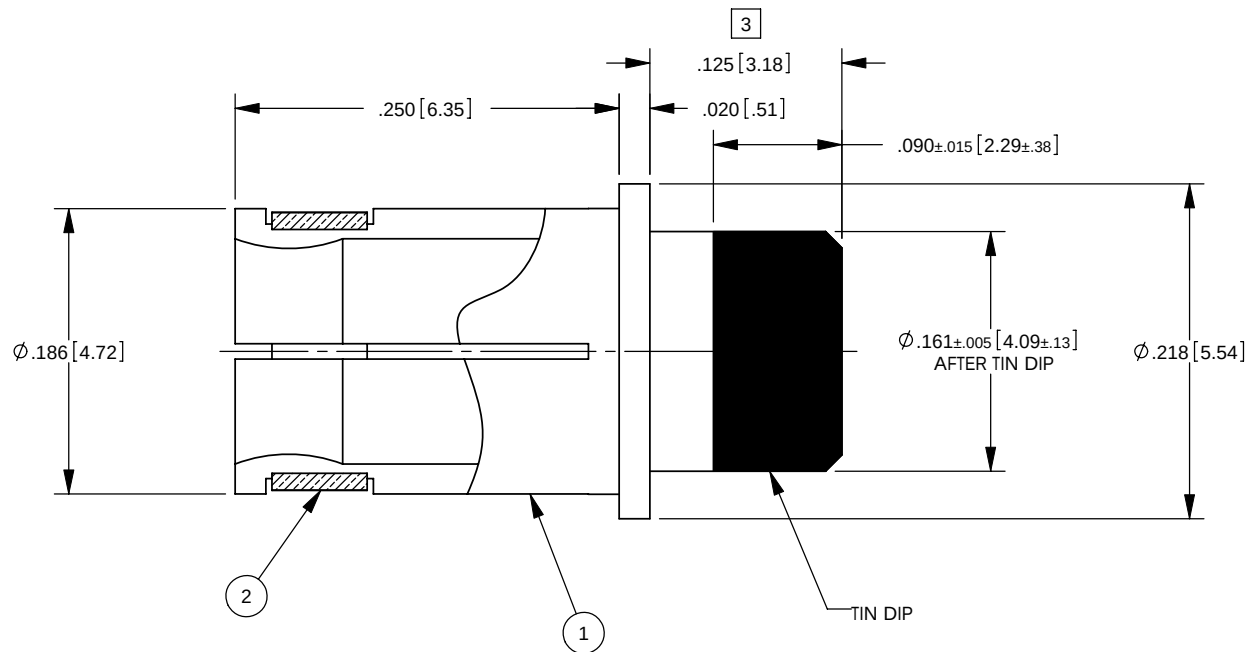

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXX] ± .XXXX ANGLES: ± 2° SCALE: 8:1				 Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492	
CUSTOMER DRAWING				POWER SNAP PC BOARD THRU HOLE 40 AMP	
DRAWN JED	DATE 10/02/97	APPROVED AT	DATE 10/02/97	A	SD01206
APPROVED JM	DATE 10/02/97	APPROVED JM	DATE 10/02/97		
				SHT 1 OF 1	REV E