


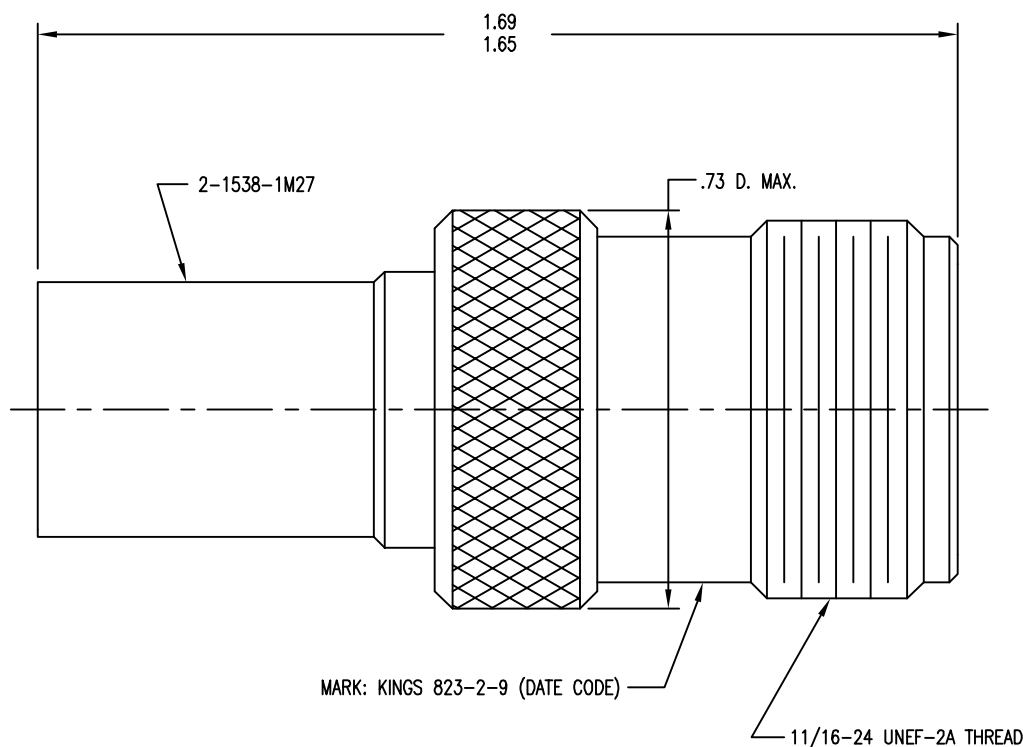

NOTES:

1. FOR USE WITH BOEING BMS13-65 OJ & ADAMS RUSSELL FC38Z CABLE.
2. FOR CABLING INSTRUCTIONS SEE 3-546-2.
3. FOR CRIMPING USE DIE KTH-2213.
4. INTERFACE PER MIL-STD-348, FIG. 309-2.
5. CENTER CONTACT (1-842-24MA9) SUPPLIED UNASSEMBLED.
6. MARK PACKAGE: KINGS 823-2-9 (DATE CODE)
7. MATERIALS:
INSULATOR-TEFLON, ASTM D1710
K-GRIP SLEEVE-COMMERCIAL BRONZE, ASTM B135
CENTER CONTACT-BER. COP., ASTM B196
ALL OTHER METAL PARTS-BRASS, ASTM B16
8. FINISHES:
CENTER CONTACT: .000050 MIN GOLD PLATE, PER ASTM B488
OVER .000050 MIN NICKEL PER AMS-QQ-N-290 (RoHS)
ALL OTHER METAL PARTS: .000050 MIN NICKEL PER AMS-QQ-N-290
OVER .000050 MIN COPPER PER ASTM B734 (RoHS)
9. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE-50 OHMS
FREQUENCY RANGE-DC TO 11 GHZ
WORKING VOLTAGE-1000 VRMS
10. WEIGHT: 32.5 GRAMS

REVISIONS

ISSUE	CHANGES
0	ER 35919 MJB 11/30/94
B	REVISED PER DMF304 AND ER35340 CY 10/24/11

CUSTOMER SALES DRAWING

THIS DRAWING, THE DESIGNS AND IDEAS EMBODIED IN THE DEVICE TO WHICH IT RELATES, AND THE METHOD OF PRODUCING THE DEVICE, ARE THE PROPERTY OF WINCHESTER ELECTRONICS CORPORATION AND SHALL NOT BE EMPLOYED, COPIED, OR DISCLOSED TO ANYONE, IN ANY MANNER WITHOUT THE CONSENT OF WINCHESTER ELECTRONICS CORPORATION.

SCALE 4:1

APPROX SURFACE AREA

WAS: E-18310

CAGE CODE:91836

REF: BOEING

JACK, SC

DRAWN	KH	DATE	04/08/94
DESIGN	JT	DATE	04/11/94
APPR.	CT	DATE	12/01/94

KINGS
by WINCHESTER
ELECTRONICS
Winchester Electronics
82 Barnes Industrial
Road North
Wallingford, CT 06492

823-2-9