



PERRIN & ROWE® 4-PORT, 3-WAY DIVERTER ROUGH

ROHL Perrin & Rowe® Bath


U.5562NBO

FEATURES COLORS/FINISHES WARRANTY

 Must use with volume control(s) or pressure balance systems N/A


· Limited Lifetime

- · Ceramic disc control cartridges
- 1 inlet, 3 outlets
- 1/2" NPT inlet, 3 x 1/2" NPT outlets
- Flow can be split between adjacent outlets
- 1/2" inlet must be installed at the bottom for proper installation.
- Flipping the valve will cause improper operation
- Up to 10 GPM
- Must order trim to complete

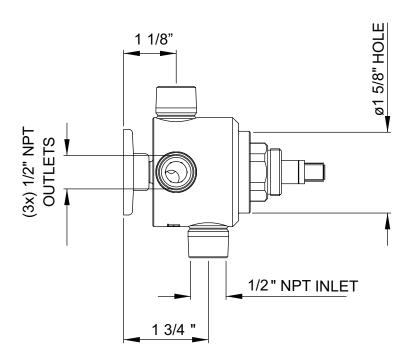



U.5562NBO Spare Parts

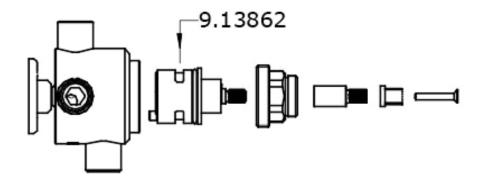






The Traditional Bathroom Collection

Installation & User Guide

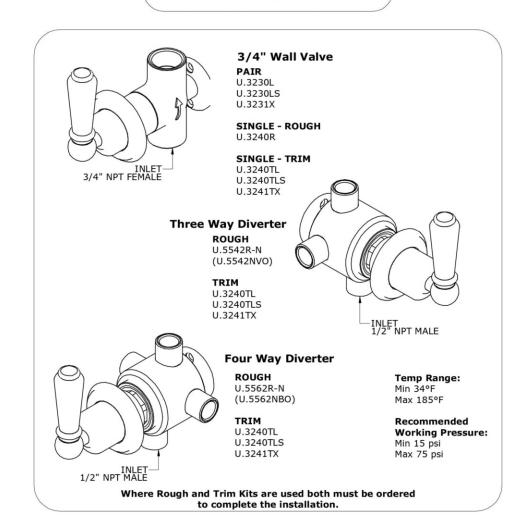



The Traditional Bathroom Collection **Installation & User Guide**

Congratulations on the purchase of your Perrin & Rowe Bathroom Product. Correctly installed and with sensible care, this product will give you many years of trouble free service.


IMPORTANT INFORMATION

Before you proceed... We recommend you engage the services of a registered plumber to install this


In addition to the guide below it is essential that the written information overleaf is carefully read and understood.


Preparation for Installer

Flush the plumbing system before Once unpacked remove Trim Kit ready for installing the bathroom product. installation.

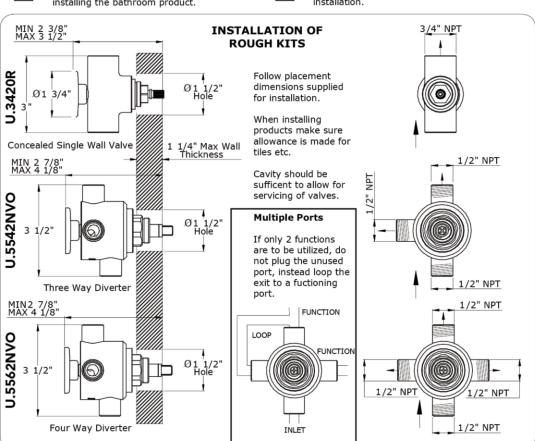



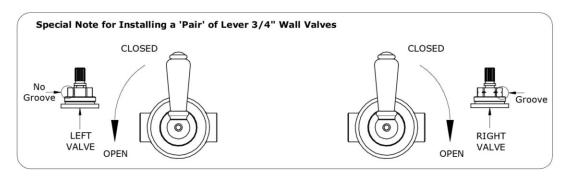

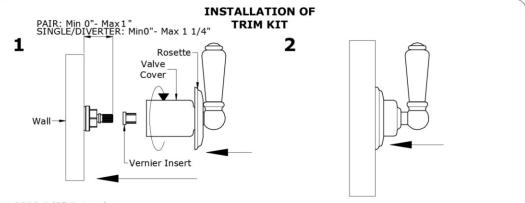

U.3233 5/8" Extension. U.3243 1 1/4" Extension.

Required if Rough Kit is outside the above Min - Max figure.

If required screw Extension over Rough Kit before carrying out Trim Kit Installation.

Concealed Wall Valve

Ensure the handle is vertical when the valve is in the 'off' position.

If required the Vernier Insert can be removed and turned a few splines until correct alignment is achieved.

Three & Four Way Diverter

For ideal operation, place the handle vertically when the diverter is fully open on one port.

If required the Vernier Insert can be removed and turned a few splines until correct alignment is achieved.

OPERATION

Ceramic disc valves are fitted as standard to the Wall Valves. Flow from FULLY OFF to FULLY ON is achieved by rotating the handles a quarter turn.

BEFORE USE

- Carefully check the installation for leaks.
- If further building work is to be carried out in the vicinity, cover the fitting to avoid damaging the finish.
- Please ensure that the installation complies with the local plumbing codes.



CARE & MAINTENANCE

Occasional cleaning with warm soapy water, followed by a polish with a soft cloth is all that is required to keep the plated finish in good condition.

Do not use proprietary abrasive liquids, powders, or pads to clean the product. You will damage the plated finish and void your guarantee.


ROHL WARRANTY POLICY

All products supplied by ROHL carry warranties against manufacturing defects.

Perrin & Rowe products carry a Limited Lifetime Warranty.

ROHL LLC will provide free of charge, as its options, replacement part(s) or product (or a comparable alternative product) to replace those which have proven defective in materials or workmanship.

For full ROHL LLC WARRANTY please contact ROHL or visit www.rohlhome.com

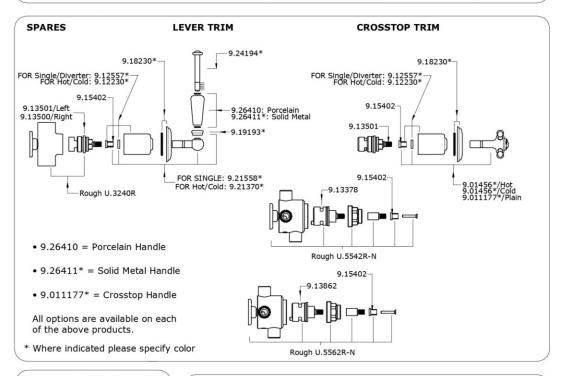



Authentic Luxury for Kitchen and Bath 3 Parker Irvine CA 92618

(714) 557-1933 www.rohlhome.com Perrin & Rowe products are manufactured in the UK, using the latest technology and built to the highest quality standards.

We would like to thank you for purchasing a Perrin & Rowe product and take this opportunity to invite you to look at other luxury products by us. Please contact us to receive our latest product catalogue.

Perrin & Rowe is a registered trademark.

9003230U

Issue 4