

SWT Tankless Water Heater Valve Service Kit

Job Name	
Location	
Engineer	
Contractor	
Tag	_PO#



D05001; D05101; D05111



D05012



Pressure Relief Valve

Gas Connector

Specifications

- Sweat end connection
- Constructed of forged brass
- Color-coded hot and cold valves
- 1 year limited warranty
- Can handle up to 600 psi of water pressure
- 32°F 180°F temperature range

May include:

- lead free pressure relief valve
- 1" OD (3/4" ID) X 24" long, 3/4" male pipe thread X 3/4" female pipe thread yellow coated corrugated stainless steel gas connector

Applications

Potable water

Materials

Brass

Dimensions and Product Offering

-see following page

Certifications/Listings/Approvals

- NSF/ANSI/CAN 372 and 61
- NSF/ANSI 14
- IAPMO/ANSI Z1157
- IAPMO approved for cUPC usage (components individually certified)
- Lead law compliant









Dimensions and Product Offering

Part Code	Size	Pressure Relief Valve	Gas Connector	Α	В	С	D	E	F
D05001	3/4"			1.77"	3/4 - 14 NPT	4.07	.63"	.88"	3.09"
D05101	3/4"	Yes		1.77"	3/4 - 14 NPT	4.07	.63"	.88"	3.09"
D05111	3/4"	Yes	Yes	1.77"	3/4 - 14 NPT	4.07	.63"	.88"	3.09"
D05012	1"			2.22"	1 - 11.5 NPT	4.72"	.63"	1.13"	3.75"

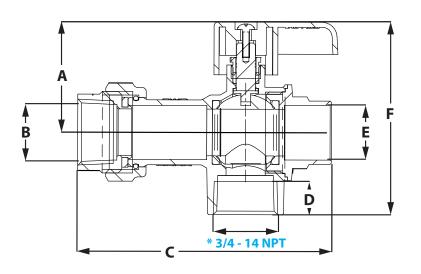

D05001; D05101; D05111 3/4" Valves * Cold Valve does not have this port



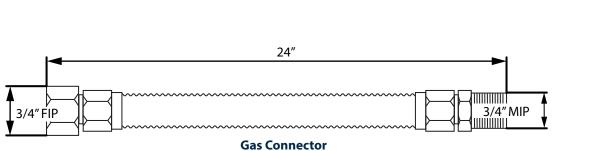


D

* 3/4 - 14 NPT

С

T Ε



Pressure Relief Valve

A

В