# 7832

## INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions as you may need them a later date.

#### **CAUTION**

WARNING: Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor. Turn off the main power at the circuit breaker before installing the fixture in order to prevent possible shock.

### **GENERAL**

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustration.

#### ASSEMBLY AND INSTALLATION

- 1. Remove mounting bracket (5) from the canopy (11) by removing two mounting plate screws (9). Save mounting plate screws (9) for later use.
- 2. Install mounting bracket (5) to the outlet box(1) (not included) by tightening two box screws (6).
- 3. Determine the desired hanging height and use a pair of proper chain pliers to remove and discard the excess chain (12). Ensure that you do not remove the quick link (10) at the both end of chain(12).

  Open one quick link (10) and attach it to fixture body (14) then close the quick link (10).

Open another quick link (10) and attach it to the ceiling loop of canopy (11) and then close the quick link (10).


4. Pull out the outlet wire and ground wire from the outlet box (1).

Make wire connections with wire nut (8).

- --Ribbed wire (w/o marking) or white wire from light to White wire (2) from power source.
- --Smooth wire (w marking) or black wire from light to Black wire (3) from power source.
- --Attach the ground wire (4) to mounting bracket (5) with a ground screw (7).
- 5. Attach the canopy (11) by aligning both side holes over the mounting bracket (5) then using two mounting plate screws (9) to secure it.
- 6. Install lamp cap (13) and bulbs: (bulbs not included)

(Don't exceed the maximum capacity recommended on the sockets).

INSTALLATION IS NOW COMPLETED

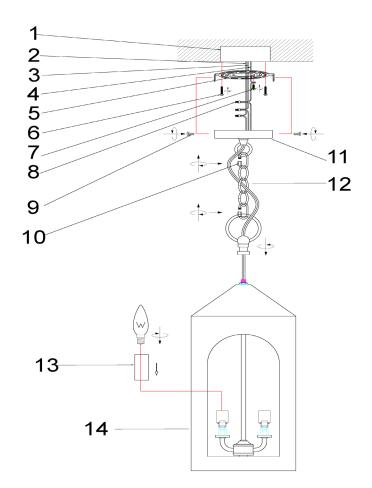

- 1. OUTLET BOX
- 2. WHITE WIRE
- 3. BLACK WIRE
- 4. GROUND WIRE
- 5. MOUNTING BRACKET
- 6. BOX SCREW
- 7. GROUND SCREW
- 8. WIRE NUT
- 9. MOUNTING PLATE SCREW
- 10. QUICK LINK
- 11. CANOPY
- 12. CHAIN
- 13. LAMP CAP
- 14. FIXTURE BODY