

**CATEGORY 6 CABLE, 4 PAIR, UTP, CMR ETL**

**Description:**


CAT6 ENHANCED 550 MHz 23 AWG SOLID BC 4PR, UTP,  
 ANSI/TIA 568.2-D, CMR ETL, PVC JKT - 1000 FT BOX

**Regulatory**

ANSI/TIA 568.2-D  
 ETL CMR FT4  
 EU RoHS 2011/65 EU Compliant

**Application:**

Lan Cable

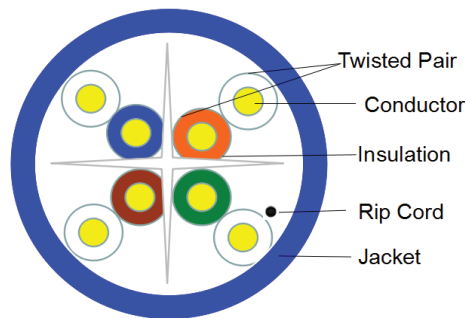

Part Number:	Jacket Color:
CAT6-BK-ETL	Black
CAT6-BL-ETL	Blue
CAT6-GN-ETL	Green
CAT6-GY-ETL	Gray
CAT6-OR-ETL	Orange
CAT6-PUR-ETL	Purple
CAT6-RD-ETL	Red
CAT6-WT-ETL	White
CAT6-YL-ETL	Yellow

**Construction Characteristics:**

Conductor	Material	Solid Bare Copper
	Size	23AWG X 4P
	Construction	1/0.552+/-0.005mm
Insulation	Material	HDPE
	Min.Thickness	0.200mm
	AVG.Thickness	0.220mm
	Diameter	1.01+/-0.01mm
	Colors	Blue- White/Blue Orange-White/Orange Green-White/Green Brown-White/Brown
Jacket	Material	PVC
	Min.Thickness	0.46mm
	AVG.Thickness	0.52mm
	Diameter	6.00+/-0.10mm
	Rip Cord	Nylon
	Color	Per request
Bend radius		Min 20D/120mm

**Electrical & Physical Characteristics:**

Operating Temperature Range		- 20°C +75°C	
Conductor Resistance		Max 72.2ohm/km at 20°C	
Dielectric Strength		Min AC1.5KV	
Spark Test		5.0KV	
Insulation	Unaged	Tensile Strength	12.3Mpa
		Elongation	150%
	Aged	Tensile Strength	9.8Mpa(100°C 168h)
		Elongation	100%(100°C 168h)
Jacket	Unaged	Tensile Strength	13.8Mpa
		Elongation	100%
	Aged	Tensile Strength	11.7Mpa(100°C 168h)
		Elongation	50%(100°C 168h)
Rated Voltage		Max 300Volts	
DC Resisitance Unbalance		Max 5%	
Pair-to-Ground Capacitance Unbalance		Max 3300pF/km	
Characteristic Impedance		100+/-15OHM	
Nominal Velocity of Propagation(%)		67~69	
Propagation Delay		Max 536ns/100m	
Delay Skew		Max 45ns/100m	

**Marking:**

STRUCTURED CABLE PRODUCTS --- CAT6 --- ETL LISTED 5002121 (ETL) C(ETL) CMR FT4 75C 23AWG SOL BC 4PR UTP  
 EU RoHS EC ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 \*\*\*FEET

**Packaging:**

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
13.3kgs/29.32lbs	400X290X400	1000FT/Box	36

### Performance-1

ITEM Frequency	Attenuation Max (dB/100m)		NEXT Min (dB)		PS NEXT Min (dB)		ACR Min (dB)	
	Standard	SCP	Standard	SCP	Standard	SCP	Standard	SCP
1	2	1.9	74.3	80.3	72.3	76.6	72.3	78.4
4	3.8	3.7	65.3	75.6	63.3	74.2	61.5	71.9
8	5.3	5.1	60.8	66	58.8	65.1	55.5	60.9
10	6	5.8	59.3	67.6	57.3	65.9	53.3	61.8
16	7.6	7.4	56.2	70.8	54.2	67.2	48.6	63.4
20	8.5	8.2	54.8	71.9	52.8	69.1	46.3	63.7
25	9.5	9.1	53.3	62.3	51.3	60.8	43.8	53.2
31.25	10.7	9.9	51.9	68.7	49.9	67.1	41.2	58.8
62.5	15.4	15	47.4	59.6	45.4	58.3	32	44.6
100	19.8	18.8	44.3	60	42.3	58	24.5	41.2
200	29	27.4	39.8	57.5	37.8	56	10.8	30.1
250	32.8	29.4	38.3	55.8	36.3	54.1	5.5	26.4
300	36.4	33.3	37.1	54.2	35.1	53.4	0.7	20.9
400	43	38.6	35.3	53.8	33.3	52.1	---	---
500	48.9	43.9	33.8	51	31.8	49.3	---	---

### Performance-2

ITEM Frequency	RL Min (dB)		ELFEXT Min (dB)		PS ELFEXT Min (dB)		PSACR Min (dB)	
	Standard	SCP	Standard	SCP	Standard	SCP	Standard	SCP
1	20	23.6	67.8	75.6	64.8	73.3	70.3	74.7
4	23	23.9	55.8	61.3	52.8	60.1	59.5	70.5
8	24.5	30	49.7	55.7	46.7	54.8	53.5	60
10	25	28.5	47.8	55.2	44.8	53.2	51.3	60.1
16	25	28.2	43.7	49.7	40.7	48.1	46.6	59.8
20	25	27.8	41.8	48.1	38.8	46.2	44.3	60.9
25	24.3	27.5	39.8	45.9	36.8	45	41.8	51.7
31.25	23.6	24.9	37.9	42.7	34.9	41.7	39.2	57.2
62.5	21.5	24.1	31.9	39.4	28.9	37.4	30	43.3
100	20.1	23.5	27.8	35	24.8	33.2	22.5	39.2
200	18	23.2	21.8	32.8	18.8	30.2	8.8	28.6
250	17.3	21.5	19.8	30.7	16.8	27.7	3.5	24.7
300	16.8	20.8	18.3	26.5	15.3	25.4	---	---
400	15.9	18.9	15.8	23.4	12.8	22.1	---	---
500	15.2	18.6	13.8	19.5	10.8	18.7	---	---