



CR9U61001

Wall Mount Enclosure

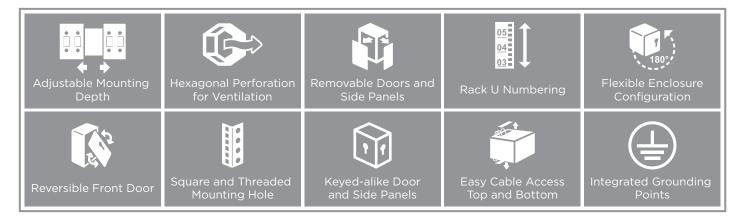

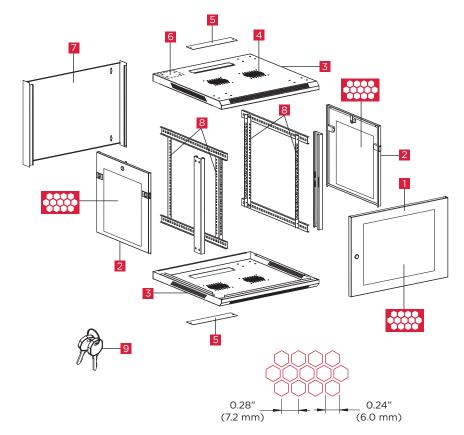

- 1 Removable, Reversible, and Lockable Front Door
- Removable and Lockable Side Panels (2)
- Top/Bottom Covers
- 4 Vents for Optional Fan Kit (4)
- 5 Cable Access with Removable Covers (2)
- 6 Reserved Holes for Optional Caster Kit
- 7 Back Panel
- 8 Depth-adjustable Rack Angles with Dual Mounting Holes (4)
- 9 Keys (2)

Hardware and Accessories

User's Manual	Expansion Bolt (4)	#12-24 Screw, Silver (30)
M6 Phillips-Head	M6 Cage Nut	Cup Washer
Screw, Black (30)	(30)	(30)

Specifications

Model	CR9U61001
Rack Height	9U
Max. Mounting Depth	22.3 in. (567 mm)
Weight Capacity-Stationary	132.3 lbs. (60 kg)
Unit Dimensions (WxHxD)	23.6 x 19.9 x 23.6 in. (600 x 505 x 600 mm)
Shipping Dimensions (WxHxD)	26.2 x 22.4 x 26.2 in. (665 x 570 x 665 mm)
Unit Weight	41.8 lbs. (18.9 kg)
Shipping Weight	48.1 lbs. (21.8 kg)
	DIN41491, DIN41494,
Approvals	EIA/ECA-310-E,
	IEC 60297-3-100, RoHS

#All specifications are subject to change without notice.


- Ships fully assembled.
- Versatile, space-efficient wall mount equipment protection maximizes floor space.
- Hexagonally perforated front door and side panels provide optimal ventilation.
- Reversible front door allows opening from left or right to meet different installation requirements.
- Vertical adjustable rack angles can be adjusted in 3/4" increments for mounting depth requirements up to 22".




Hexagonal holes, compared with round holes, allow more efficient airflow and therefore optimize ventilation.



Optional caster kit (including 4 casters) is available for mobility, allowing you to easily move and adjust the position of your rack products.

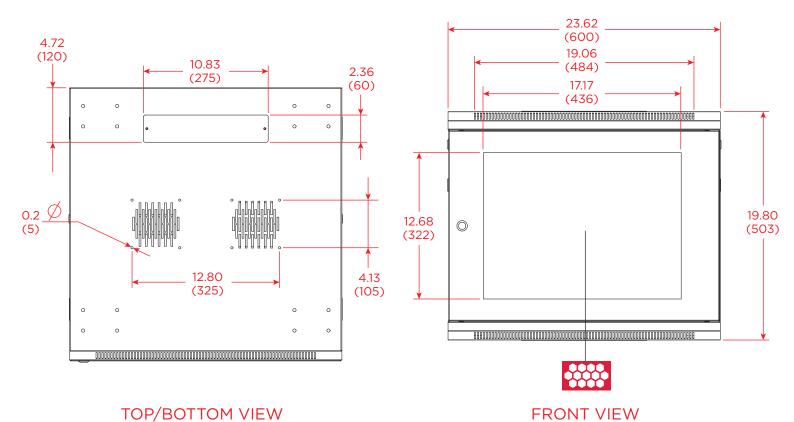


23.62 (600)17.87 (454)19.21 12.83 (488)0.94 (326)(24) \bigcirc 13.99 16.65 12.99 (455) (423)(330) $\left\{\left\{\right\}\right\}$ **}** _ 0.26 (6.5) <u>Ø</u> 0.49 (12.5) (30) **REAR VIEW** SIDE VIEW

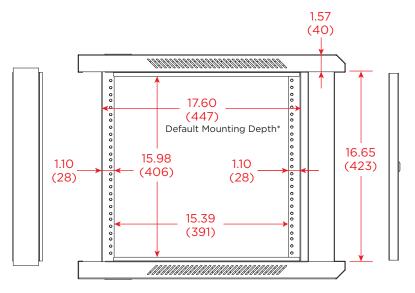

*Adjustable Mounting Depth: 1.9" - 22.3" (47 - 567 mm)

SIDE VIEW W/O PANEL

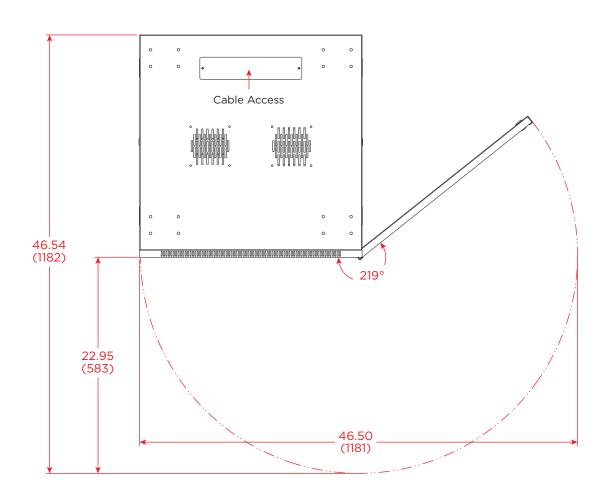

FRONT OPENING

Dimensions: INCHES (mm)



www.cyberpower.com

USA and Canada:

4241 12th Ave East, Suite 400 Shakopee, MN 55379 Toll-free: (877) 297-6937

All other regions:

Please visit our website for local contact information.