

# User Manual

## 1x4 HDMI 18 bps Splitter

### Thank you for purchasing this product

For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

### Surge protection device recommended

This product contains sensitive electrical components that may be damaged by electrical spikes, surges, electric shock, lightning strikes, etc. Use of surge protection systems is highly recommended in order to protect and extend the life of your equipment.

### Table of Contents

<b>1 Introduction .....</b>	<b>2</b>
<b>2 Features .....</b>	<b>2</b>
<b>3 Package Contents .....</b>	<b>2</b>
<b>4 Specifications .....</b>	<b>3</b>
<b>5 Operation Controls and Functions .....</b>	<b>3</b>
<b>6 Application Example .....</b>	<b>5</b>

# 1 Introduction

1x4 HDMI 18Gbps Splitter is an advanced solution for splitting a single HDMI signal to 4 HDMI displays. It provides high performance audio and video output through HDMI cables up to 4K2K@60Hz 4:4:4 and is capable of receiving and transmitting up to 18Gbps of bandwidth with no data loss.

( Supporting the latest features you can be assured of reliable and high quality HDMI distribution.)

## 2 Features

HDMI 2.0b, HDCP 2.2 compliant

Supports video format up to 4K2K@60Hz with 8 bit RGB/YCBCR 4:4:4/  
YCBCR 4:2:2

Support 3D frame sequential video format up to 1080p@60;

Supports 3D frame sequential video format up to 4K2K@30Hz

Supports high resolution VESA mode video format up to QSXGA@60Hz <

Supports LPCM 7.1CH, Dolby TrueHD, and DTS-HD Master Audio

Supports smart EDI[J control

Compact design for an easy and flexible installation


## 3. Package Contents

- 1) 1x 1x4 HDMI 18Gbps Splitter
- 2) 1x 5V/1A DC Power Adapter
- 3) 1x User Manual

## 4. Specifications

Technical	
Video Bandwidth	600MHz/18Gbps
Input Ports	1×HDMI Type A[19-pin female]
Output Ports	4×HDMI Type A[19-pin female]
Output Resolution	480i ~1080p50/60, 4Kx2K@24/30, 4k2k@60Hz
ESD Protection	Human Body model: ±8kV (Air-gap discharge) , ±4kV (Contact discharge)
Power Supply	5V/1A DC (US/EU standards , CE/FCC/UL certified)
Dimensions	63mm (W) × 163mm (D) × 16mm (H)
Weight	260g
Chassis Material	Metal
Silkscreen Color	Black
Operating Temperature	0°C ~ 40°C / 32°F ~ 104°F
Storage Temperature	-20°C ~ 60°C / -4°F ~ 140°F
Relative Humidity	20~90% RH (non-condensing)
Power Consumption	2W

## 5. Operation Controls and Functions

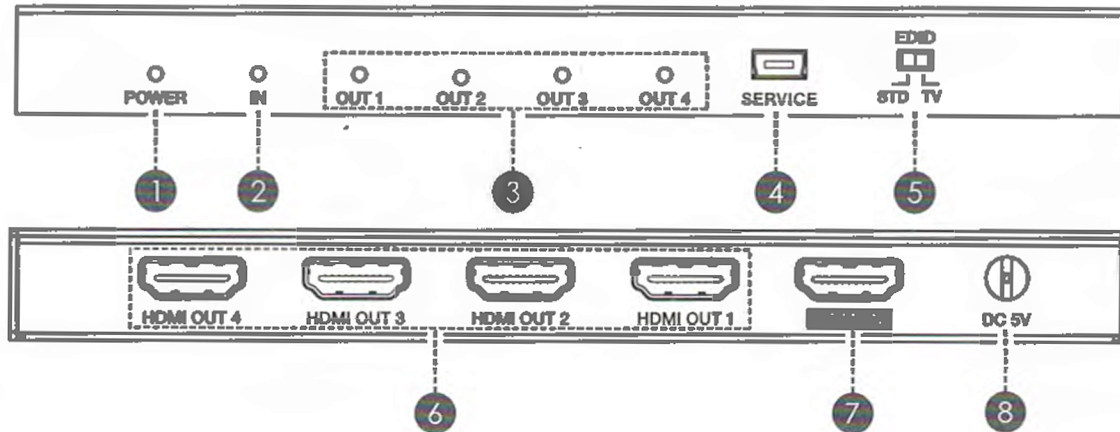

Number	Name	Function description
1	POWER LED	This blue LED illuminate <b>when the device is</b> connected with power supply.
2	N LED	This blue LED illuminate when the Source connected to the device.
3	OUT LED	These blue LEDs will light up to indicate which HDMI outputs are connected to an <b>active TV/</b> display/monitor.
4	SERVICE	Firmware update use only.
5	EDIDSTD	When in 'STD' mode, the unit will use its own built-in EDID settings. In this mode, the video output will be set to 1080p@60Hz and the audio out p1atLPCM 2CH Stereo. Use this mode if the are display problems in TV Mode
	EDIDTV	When In 'TV' mode, the unit will read the EDID settings of the display device connected to HDMI OUT 1, If it detects a 4K2K capable EDID <b>setting</b> it will transmit the signal in that format to all outputs. If no 4K2K capable EDID <b>is detected then the unit will output the best</b> resolution that all displays can support.
6	HDMI OUT 1-4	Connect each of the HDMI outputs to an HDMI display for simultaneous HDMI distribution, or cascade the output to another transmitter to extend the operating distance.
7	HDMI IN	Connect the input port to the HDMI splitter <b>output of your source device such as a DVD</b> player or set-top box with an HDMI cable.
8	DC 5V	Plug the 5V DC power supply into the unit and connected the adaptor to an AC outlet.

## 6. Application Example

