

Project Name:	
Location:	
Item #:	Qty:
Model:	

SELF-CONTAINED PREMIUM INDOOR/OUTDOOR ICE MACHINES

MODEL:

MIM50P

MIM50P-0







MIM50P-0

ELECTRIC -

120V / 60Hz / 1Ph International voltage available 6' (2m) NEMA 5-15P cord set included



NEMA 5-15P

3RD PARTY APPROVALS -











DOE 2018 Compliant

Meets Energy Star Guidelines Zero Ozone Depletion Potential

MAXX ICE WARRANTY (USA / CANADA) -

Contact Maxx Ice for warranty statement at TechnicalServices@TheLegacyCompanies.com or 877.368.2797 The Maxx Ice MIM50P Premium series of indoor/outdoor ice machines produce up to 65 pounds of ice per day (under ideal conditions). These stylish, durable and easy to install models are perfect for any freestanding or built-in application.

FEATURES AND CONSTRUCTION -

- Stainless steel / black painted steel (MIM50P) or all stainless steel (MIM50P-0) exterior
- Air-cooled compressor
- Solid state controls
- Built-in self cleaning mode
- Automatic overflow prevention
- 25 lb storage bin
- Drain pump and internal blue LED light are included
- Field reversible door
- Adjustable durable feet
- Includes ice scoop & tubing for supply and drain lines

DAILY ICE PRODUCTION —

Air Temp 70°F (21°C) / Water Temp 50°F (10°C) MIM50P...... 65 lbs (29.5 kg) MIM50P-0 65 lbs (29.5 kg)

Air Temp 90°F (32°C) / Water Temp 70°F (21°C) MIM50P...... 51 lbs (23 kg) MIM50P-0 51 lbs (23 kg)

ICE BIN STORAGE CAPACITY —

MIM50P	25	lbs	(11	kg)
MIM50P-0	25	lbs	(11	kg)

OPERATING REQUIREMENTS —

Ambient Air Temperature Range..... 50° to 100°F (10° to 38°C) Water Temperature Range 41° to 90°F (5° to 32°C) Water Usage per 100 lbs of ice...... 13.8 Gallons (52.2L) Water Supply Line Connection 1/4" O.D. Compression Water Pressure Range:

Min PSI...... 15 Max PSI75* Min Bar 1.0 Max Bar.........5.5


*Above 75 PSI requires a regulator

Energy Consumption per 100 lbs of ice:


MIM50P...... 10.1 kWh/100 lbs MIM50P-0 10.1 kWh/100 lbs TOP VIEW


SELF-CONTAINED PREMIUM INDOOR/OUTDOOR ICE MACHINES


14.6" (370 mm) MIM50P/ MIM50P-0



FRONT VIEW





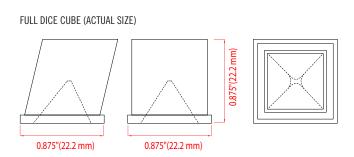

MODEL	EXTERNAL Dimensions	DAILY ICE PRODUCTION (70°F Air / 50°F Water)	ICE BIN STORAGE Capacity	NET WEIGHT / Shipping Weight	AMP DRAW (Making / Harvesting)	REFRIGERANT And Charge Size	ELECTRICAL
MIM50P	14.6" x 25" x 33.3" (370 x 632 x 845 mm)	65 lbs (29.5 kg)	25 lbs (11 kg)	92 lbs (41.7 kg) 101 lbs (45.8 kg)	3A / 4A	R-134a 3.88oz (110g)	115V / 60Hz / 1Ph
MIM50P-0	14.6" x 25" x 33.3" (370 x 632 x 845 mm)	65 lbs (29.5 kg)	25 lbs (11 kg)	92 lbs (41.7 kg) 101 lbs (45.8 kg)	3A / 4A	R-134a 3.88oz (110g)	115V / 60Hz / 1Ph

INSTALLATION -

- A clearance of 2" from the wall is recommended to promote adequate cooling air circulation
- A gravity drain line is required to install this ice machine
- For optimal performance, the use of a water filter is recommended