

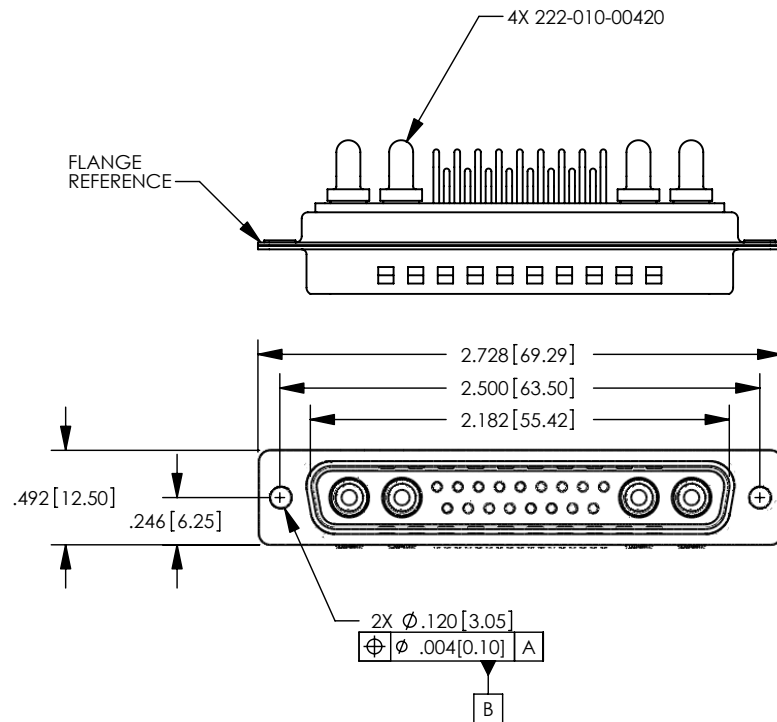


NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR GENERAL SERIES SPECIFICATIONS, SEE SD10-0000.
2. SEE CONTACT SALES DRAWING FOR CONTACT SPECIFICATIONS.
REFER TO SD222-010-00420G
2. MATERIAL SPECIFICATIONS:
SHELLS: STEEL PER ASTM A568
SIGNAL CONTACTS: COPPER ALLOY
INSULATOR: HIGH TEMPERATURE THERMOPLASTIC
3. FINISH SPECIFICATIONS:
SHELLS: TIN PLATE PER ASTM B545
SIGNAL CONTACTS: 30 μ IN. MIN Au PER ASTM B488 OVER
50 μ IN. MIN Ni PER SAE-AMS-QQ-N-290
INSULATOR: BLACK

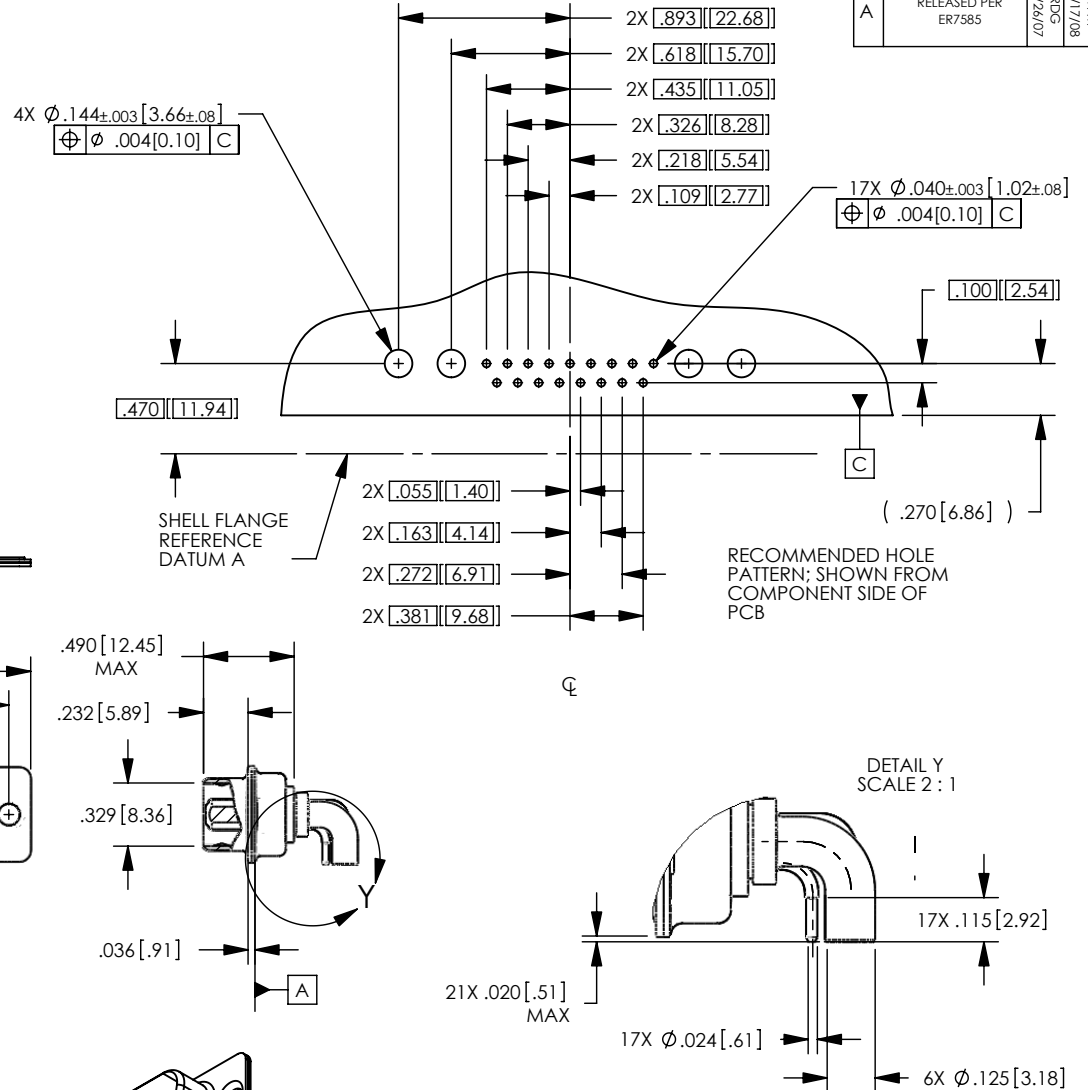

CATALOG P/N: RM21WA4P-1028

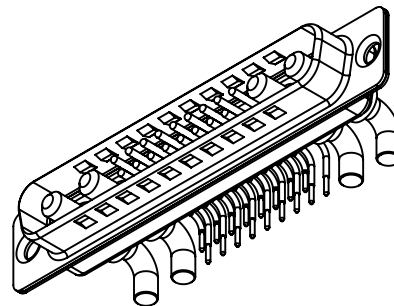

REV	DESCRIPTION	BY DATE	APPD
A	RELEASED PER ER7585	04/26/07	WFM

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXX] ± .XXXX ANGLES: ± 2° SCALE: 1:1				Winchester Electronics Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492	
CUSTOMER DRAWING				D-SUB PLUG CONNECTOR (NON ROHS)	
DRAWN RDG	DATE 04/11/08	APPROVED MA	DATE 04/17/08	A SDRM21WA4P-1028 SH1 1 OF 1	
APPROVED DC	DATE 04/17/08	APPROVED JP	DATE XX/XX/XX		