

SIMPL'HOME



It's time to register your product warranty.

It's quick and easy. And you'll be happy you did.



- ✓ Activate your **1-year** warranty
- ✓ Automatic entry to win a \$500 gift certificate
- ✓ Earn instant rewards and save



simpli-home.com/product-registration

SIMPL'HOME

Review your product and collect rewards!

Thank you for your purchase! We hope you enjoy it. We'd love your feedback. Please share a review and get instant rewards!





simpli-home.com/product-review



Share photos and get your cash back!



Send us images or share them on social and qualify for instant rewards. You may even receive store credit on your entire purchase!







simpli-home.com/share-images

SIMPLHOME

For Fastest Customer Service:



- 1. Open your phone's camera.
- 2. Point your phone's camera at the QR code to scan.
- 3. Click on the pop up.
- 4. You'll be taken to our customer service page.
- 5. Fill the form with your order information and issue.
- 6. Submit form.
- 7. A customer service associate will contact you.

Other ways to contact us...



Email Us customerservice@simpli-home.com



Visit Us t our site directly a

Visit our site directly at www.simpli-home.com



Call Us

1-866-518-0120 Monday to Friday 9am to 5pm EST

*If you've purchased from a retailer and you wish to return the product, please contact the retailer directly.

IMPORTANT : Please read this manual carefully before beginning assembly of this product. Keep this manual for future reference.

Safety Information

Identify all the parts and hardware. Do not discard of the packaging until you have checked that you have all of the parts and hardware required. Hardware package may have spare parts.

WARNING: This item contains small parts which can be swallowed by children and pets. Keep children and pets away during assembly. To avoid danger of suffocation, always keep plastic bags away from children and pets. We recommend that you assemble this unit on a carpeted floor to avoid scratches. If using power tools, set the tool to low torque to avoid damage.

May require 2 people for ease of assembly.

Care & Maintenance

This furniture is designed for indoor use.

Perhaps the greatest environmental damage to wood furniture comes from wide swings in relative humidity (RH) in our homes. Wood absorbs and desorbs water as relative humidity rises and falls, and in doing so it swells and shrinks. Making matters worse, it expands and contracts unequally along different grain directions. As humidity changes, the components of wooden objects are continually pushing and pulling against each other. This pressure often results in parts of furniture no longer fitting together closely or becoming distorted or breaking from their own internal stresses.

The response to relative humidity changes begins with determining the annual average RH for your particular space. Then try to keep the RH in the space where your furniture is as close to that average as possible, generally within about 10% up or down. De-humidify in the summer and humidify in the winter.


Be aware that raising the temperature lowers the humidity and vice versa. Thus, modern heating systems, which can drive down interior RH in the winter, almost invariably cause problems for furniture. To counteract their effect, you can either modify the RH by keeping furniture containing spaces cooler in the winter or most importantly, have a good working humidifier for your home. A humidistat automatically works to balance the humidity in your home so it is constant. Dry indoor air can suck enough moisture from its surroundings to do permanent damage to wood, causing it to crack or split.

Remember, that not all woods are created equal. Two factors that help determine how rapidly a wood will lose moisture are pore size and surface hardness. A piece made from a dense and hard wood will dry less rapidly than pieces made from softer woods.

Furniture that is sealed and lacquered will lose moisture more slowly than an unfinished piece while pieces with veneer finishes are not only stronger but lose moisture more slowly than other finishes.

To help protect your wood furniture, take these steps:

- Use a humidifier, preferably one with an automatic control system that can sense the humidity level and adjust itself accordingly
- Don't over-humidify; that can damage wood by causing it to expand and contract
- Keep furniture out of direct sunlight, which can cause it to dry out, crack and warp
- If you can avoid it, don't put furniture near heating vents; if you can't, keep the item 3 to 4 inches away from the wall, giving the heat and air space to circulate
- Dust with soft dry cloth
- Do not use liquid or aerosol products
- To avoid marking, do not place rubber on surface (foot pads, etc.)
- For soil build-up, wipe with damp cloth & dry
- Do not use abrasive cleaners

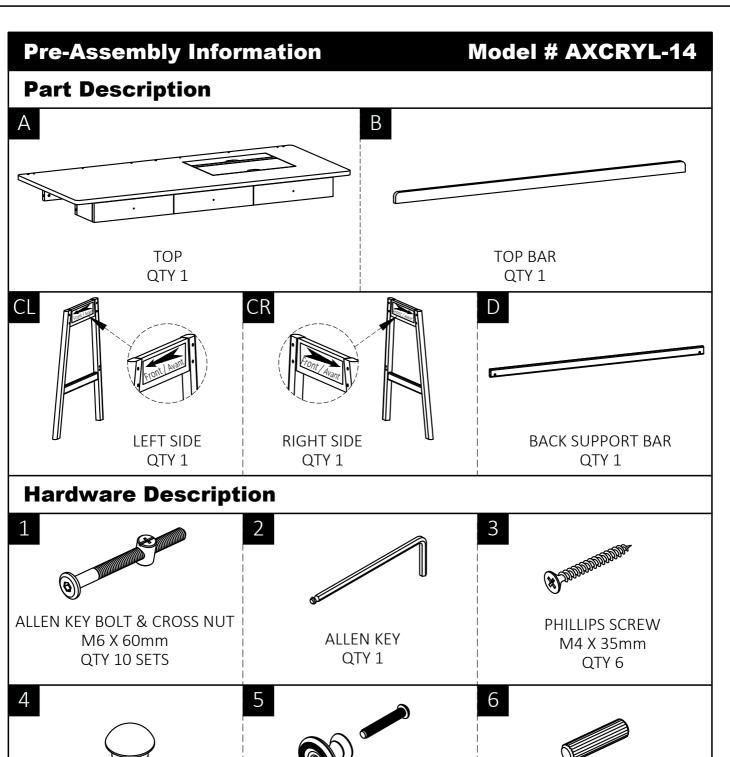



WOOD BOLT CAPS

QTY 10

POWER CENTER

QTY 1

7



8

PHILLIPS SCREW M3 X 15mm QTY 2 WOOD DOWEL

Ø8 X 30mm

QTY 5

B


Required -Flathead screwdriver Phillips screwdriver

Rubber mallet

Not Included


Components - Key Diagram

Model # AXCRYL-14

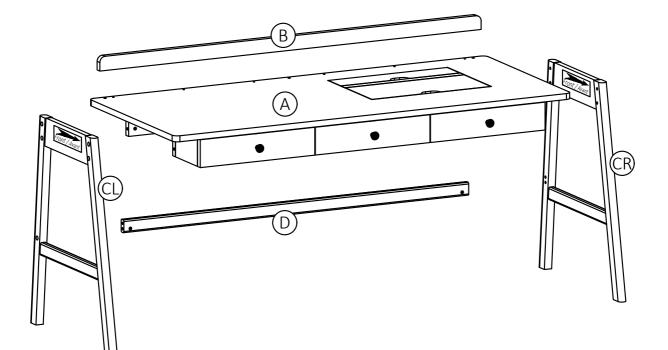

Assembly

Model # AXCRYL-14

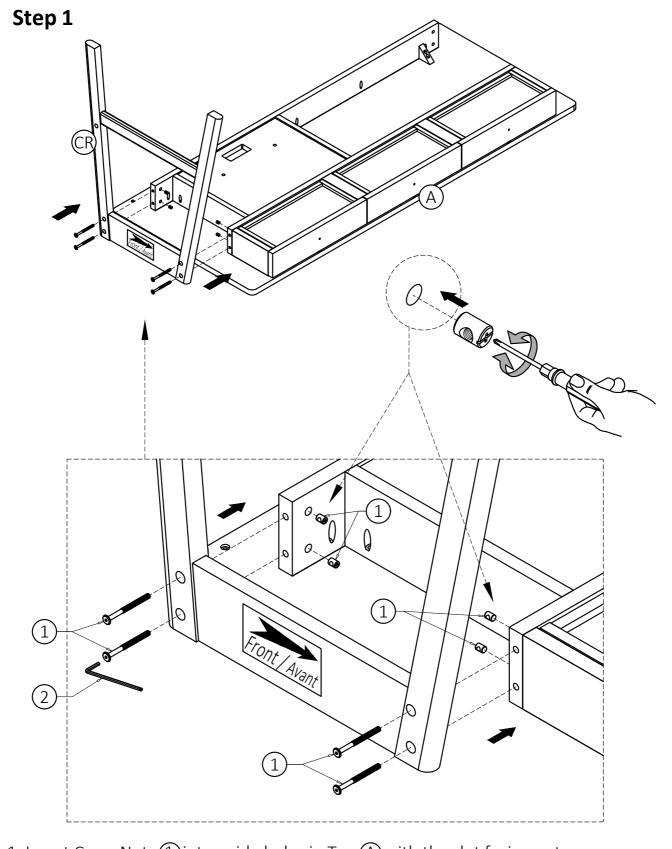


- 1. Insert Cross Nuts 1) into guide holes in Top (A) with the slot facing out. Use a flathead Screwdriver to turn it to align with the Bolts (1).
- 2. Use Allen Key (2) to tighten Bolts. Do not over-tighten

Model # AXCRYL-14 Assembly Step 2 6 D 6 6) 1. Insert two Dowels (6) into guide holes on Back Support Bar (D). 2. Use rubber mallet to tap Dowels (6) into bottom of holes securely. 1/2 length of Dowels should be exposed. Step 3 1 1 А

- 1. Align guide holes on Right Side (\mathbb{R}) with Dowel on Back Support Bar (\mathbb{D}) .
- 2. Insert Cross Nuts (1) into guide holes in Back Support Bar (D) with the slot
- facing out. Use a flathead Screwdriver to turn it to align with the Bolt (1).
- 3. Use Allen Key (2) to tighten Bolts.

Assembly


Model # AXCRYL-14

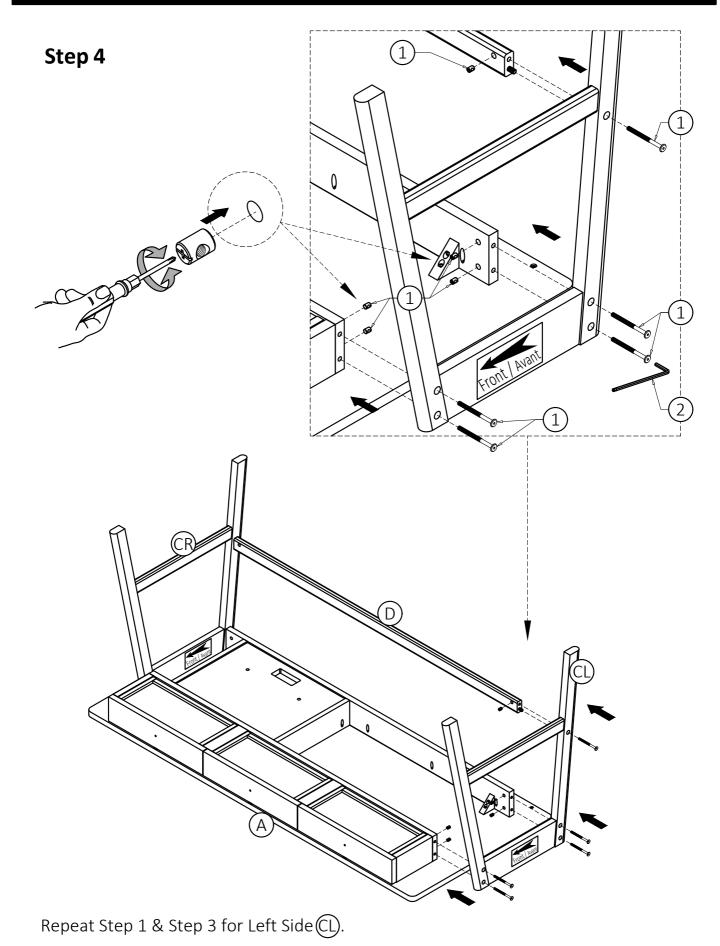


11

Assembly Model # AXCRYL-14

- 1. Insert three Dowels (6) into guide holes on Top Bar (B).
- 2. Use rubber mallet to tap Dowels (6) into bottom of holes securely. 1/2 length of Dowels should be exposed.

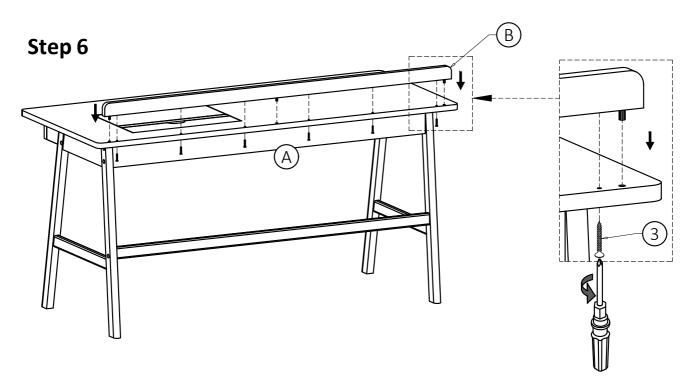


- 1. Align Wood Dowels with guide holes on Top(A) and attach Top Bar(B) to Top(A).
- 2. Use six phillips Screws (3) to attach Top Bar (B) through guide holes.
- 3. Use Phillips screwdriver to tighten Screws. Do not over-tighten.

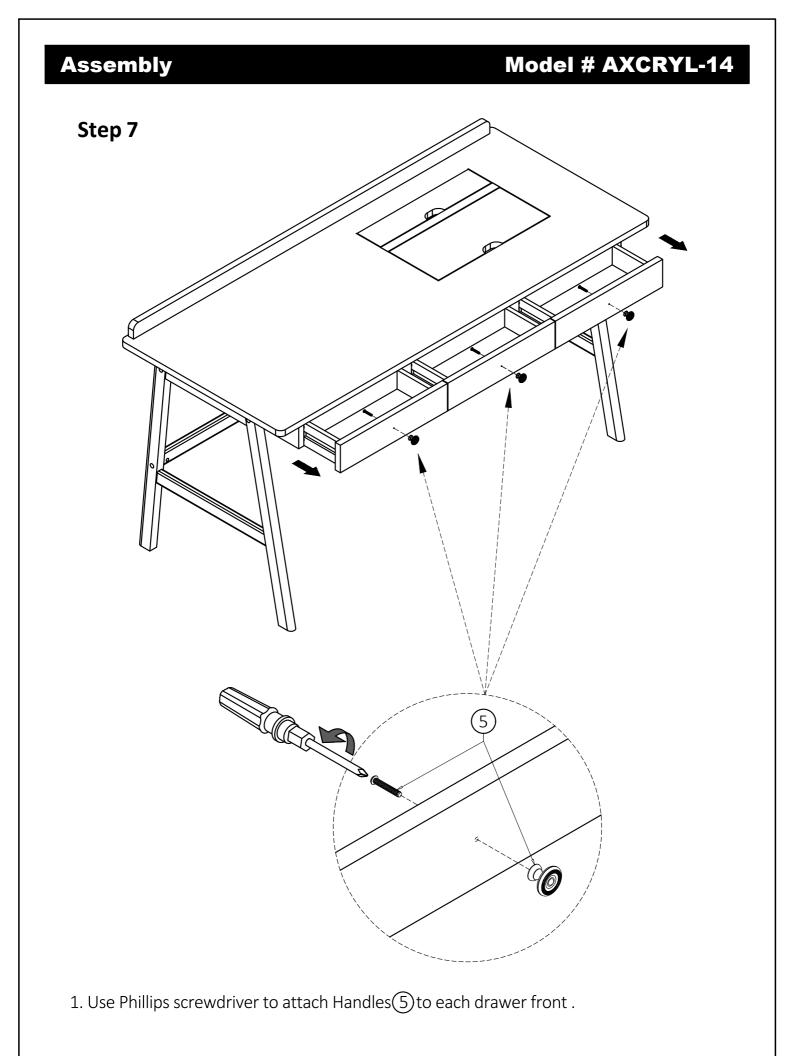

Assembly

Model # AXCRYL-14

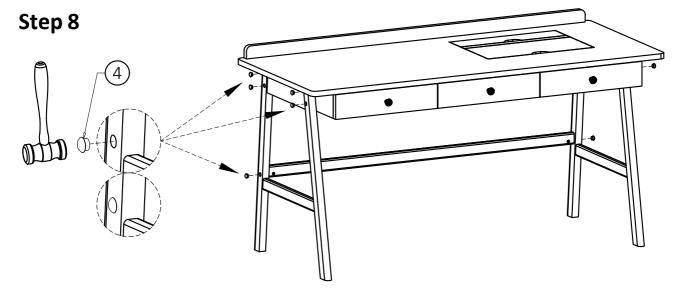

- 1. Insert Bolt Caps (4) into exposed bolt holes on each Side (CL), (CR).
- 2. Use rubber mallet to tap Bolt Caps ④ into guide holes securely.

