THIS INFORMATION IS PROPRIETARY AND CONFIDENTIAL. IT IS DISCLOSED TO YOU ON THE CONDITION THAT NO FURTHER DISCLOSURE IS MADE TO OTHER THAN RETCONN PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM RETCONN INC.

FSCM	CONTROLLED	DWG. NO.
ODWJ4	DOCUMENT	450-500-0470H

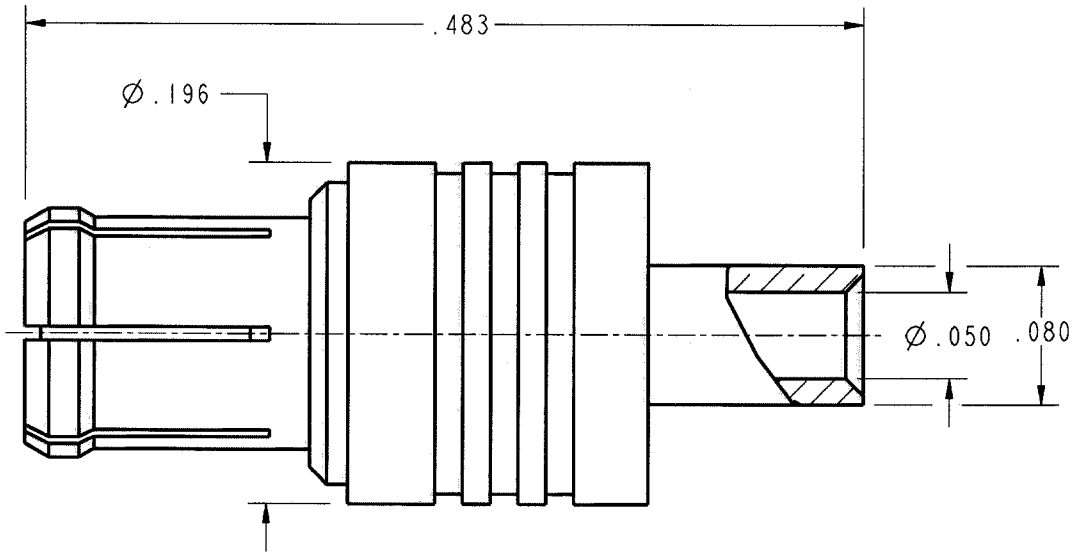



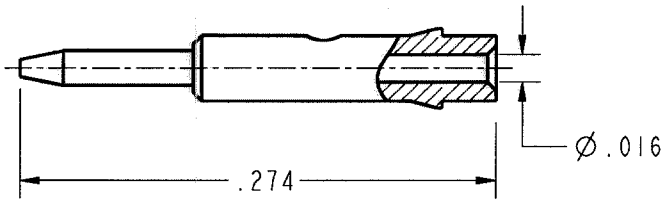

NOTES:
1. MATERIALS;
   BODY AND CENTER CONTACT: BRASS PER ASTM B16
   INSULATOR: TEFLON PER ASTM D1710
   OUTER CONTACT: BE CU PER ASTM B196
2. FINISH:
   BODY & OUTER CONTACT: .000015 MIN. GOLD PER MIL-G-45204
   OVER .000050 MIN. NICKEL PER QQ-N-290
   CENTER CONTACT: .000030 MIN. GOLD PER MIL-G-45204
   OVER .000050 MIN. NICKEL PER QQ-N-290
3. FOR USE WITH .047 SEMI RIGID CABLE
5. USE CABLE ASSEMBLY PROCEDURE 9-07.

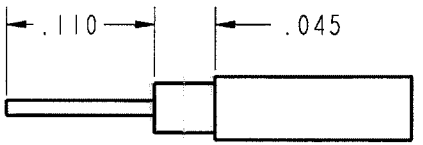

RECOMMENDED CABLE
TRIM DIMENSIONS

SALES DRAWING

REV	DESCRIPTION OF CHANGE	DATE	DRN	APPR
-	RELEASE PER NPR 924	11/17/98	EJW	

REVISIONS

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE NOMINAL AND
FOR REFERENCE ONLY.
DIMENSIONS IN INCHES
DO NOT SCALE PRINT

MATERIAL:

FINISH:

RETCONN
A SUBSIDIARY OF SPM
199 W. PEARL ROAD TORRINGTON, CT 06790
TEL (860) 489-1220 FAX (860) 496-7307

TITLE: MCX STRAIGHT PLUG

DRAWN	DATE	CHECKED	SCALE	SHEET
EJW	11/17/98		9/1	1 OF 1

APPR. | DWG. NO. 450-500-0470H | REV. -

June 2006 - This drawing became the property of Winchester Electronics Corporation, Wallingford, CT.