


DWG NO 220-010-0001G

REV	DESCRIPTION	DATE	APPD
E	ECR 6798	5/1/00	JH

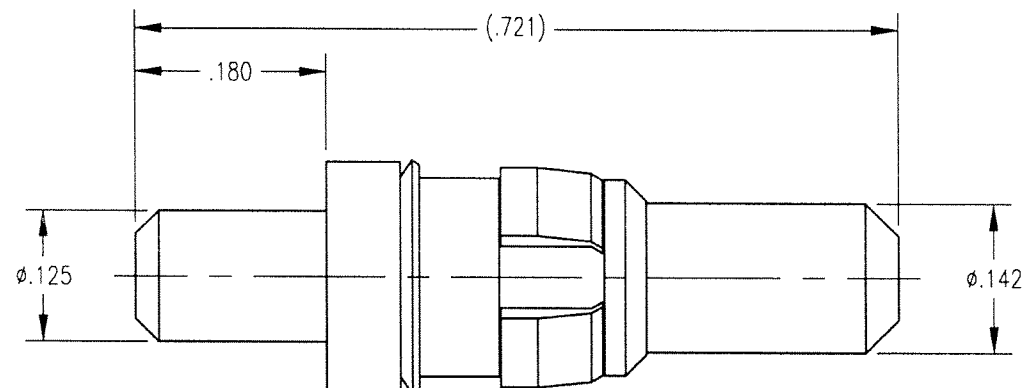

NOTES:

1. MATERIALS:

BODY: BRASS PER ASTM B16
 CLIP RING: BERYLLIUM COPPER PER ASTM B194
 SPRING WASHER: PHOSPHOR BRONZE PER ASTM B103

2. FINISH:

BODY: .000030 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 SPRING WASHER: .000005 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 CLIP RING: .000100 MIN NICKEL PER QQ-N-290
 OVER COPPER FLASH

3. ELECTRICAL:

CURRENT RATING: 40 AMPS

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (IN) TOLERANCES DECIMALS XX ± .01/0.254 XXX ± .005/0.127 ANGLES ± Z° SCALE 6:1				Litton Winchester/Retconn 400 Park Road Watertown, Connecticut 06795	
CUSTOMER DRAWING				TITLE RDM HIGH POWER P.C. PLUG 40 AMP	
DRAWN JED	DATE 5/26/00	CHECKED JH	DATE 5/26/00	A 220-010-0001G	
APPROVED JMC	DATE 5/30/00	APPROVED KJT	DATE 5/26/00	SHET 1	OF 1
				REV. E	