

Lifesaver® Ceiling-Mounted Emergency Shower

MODELS:

- SE-236: Emergency Shower with Stainless Steel Ring and Chain Activation
- SE-236-PR: Emergency Shower with Yellow Pull Rod Activation

FEATURES:

- 10" high performance emergency shower head with integral flow control
- 1" NPT female brass, chrome-plated, full flow stay-open ball valve
- 1" NPT female inlet
- Horizontal Supply
- 20 GPM (75.71 L/min) @ 30 PSI flow rate
- Universal emergency sign included

OPTIONS:

- FPV: Freeze protection valve
- SPV: Scald protection valve
- SSBV: 1" Stainless steel ball valve
- SPR: Stainless steel pull rod

STANDARDS:

- ANSI/ISEA Z358.1 certified

WARRANTY:

Visit www.speakman.com for full product warranty information

- 3 Year Limited Warranty (commercial)



Information continues on next page


All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space:


P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: 02-NOVEMBER 2019

Lifesaver® Ceiling-Mounted Emergency Shower

SE-236

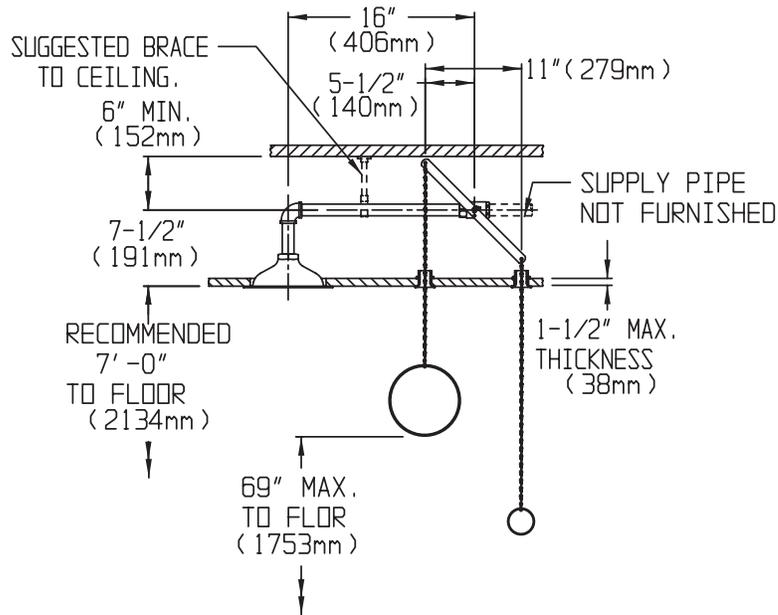

SE-236-PR

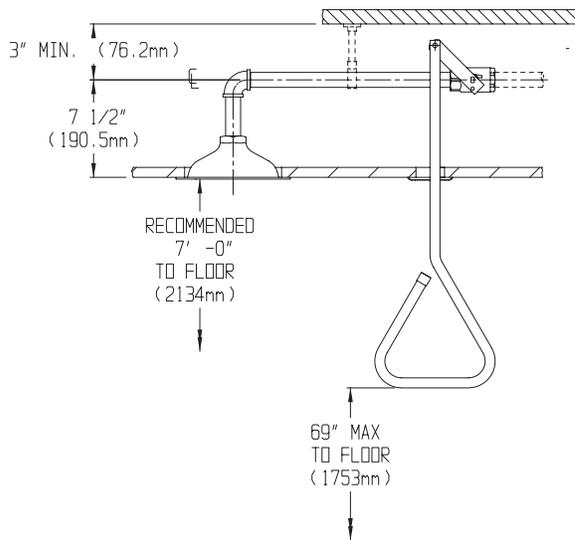

All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

Architect/Engineer Approval Space:

P: 800-537-2107
 F: 800-977-2747
 W: WWW.SPEAKMAN.COM
 R: 02-NOVEMBER 2019