





# 18" BUILT-IN INFRARED SIDE BURNER

MODEL: **BIB18IR**

## DIMENSIONS AND CLEARANCES

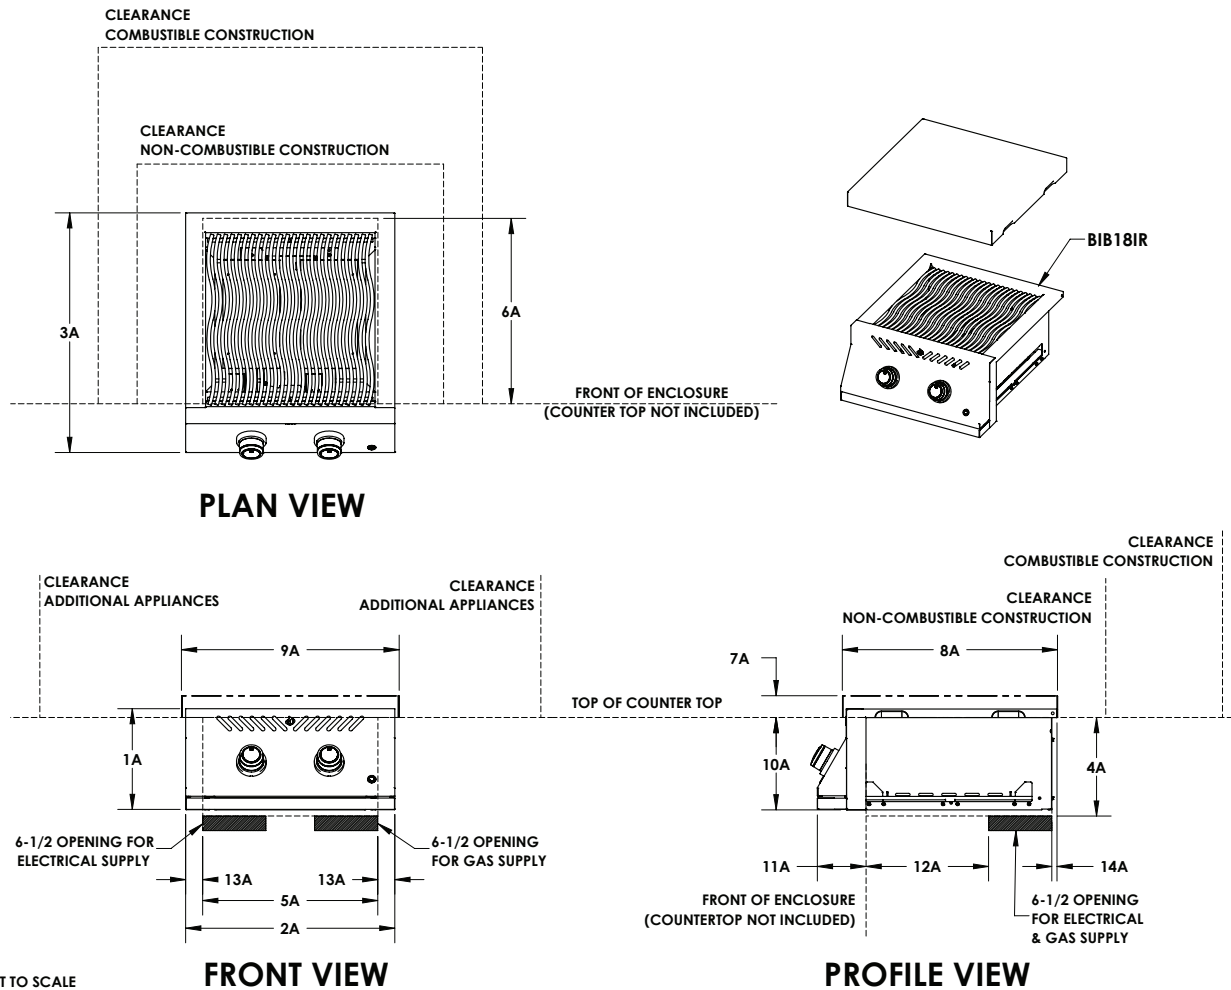

DIMENSIONS		IN	MM
1B	Overall height of appliance	11 1/8	308
2B	Overall width of appliance	23 3/4	603
3B	Overall depth of appliance	28	711
4B	Cut-out height for appliance	11 1/4	286
5B	Cut-out width for appliance	24	610
6B	Cut-out depth for appliance	22 1/4	565
7B	Height of lid	2 1/4	57
8B	Depth of lid	22 1/8	562
9B	Width of lid	22 3/8	568
10B	Height from countertop to bottom of appliance	11 1/4	286
11B	Depth from front of appliance to front of enclosure	5 7/8	149
12B	Distance from front of enclosure to front side of openings for utilities	16 3/8	416
13B	Side distance from cut-out to side of openings for utilities	2 13/16	71
14B	Rear distance from cut-out to side of openings for utilities	4 3/16	106

MINIMUM CLEARANCES		IN	MM
Clearance to combustible construction – back*		17	432
Clearance to combustible construction – side*		9	229
Clearance to non-combustible construction – back*		5	127
Clearance to non-combustible construction – side*		5	127
Distance to additional appliances*		15	381

NOTE: \* CLEARANCES ARE MEASURED FROM APPLIANCE, NOT ACCESSORIES. REFERENCE OWNER'S MANUAL FOR INSTALLATION INSTRUCTIONS AND DEFINITIONS




# 18" BUILT-IN INFRARED SIDE BURNER WITH OPTIONAL ZERO CLEARANCE LINER

MODEL: **BIB18IR WITH BI-2423-ZCL**

## DIMENSIONS AND CLEARANCES

Refer to page 1 for unit without zero clearance liner

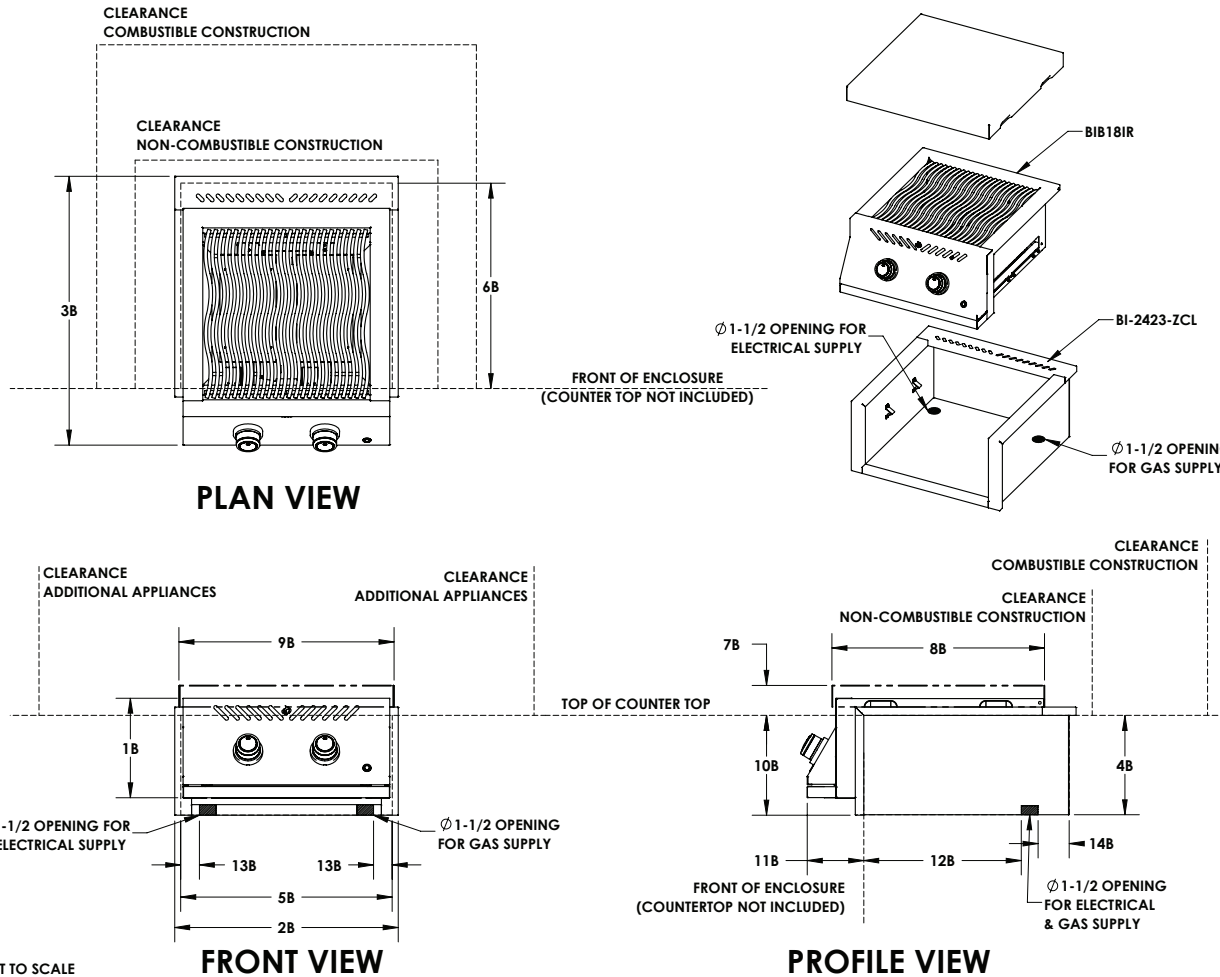

DIMENSIONS	IN	MM
1B Overall height of appliance	13 1/8	333
2B Overall width of appliance	23 1/4	591
3B Overall depth of appliance	28	711
4B Cut-out height for appliance	10 3/8	284
5B Cut-out width for appliance	22	559
6B Cut-out depth for appliance	21 3/8	543
7B Height of lid	3 1/8	79
8B Depth of lid	22 1/8	562
9B Width of lid	22 3/8	568
10B Height from countertop to bottom of appliance	10 3/8	264
11B Depth from front of appliance to front of enclosure	5 7/8	149
12B Distance from front of enclosure to front side of openings for utilities	16 3/8	416
13B Side distance from cut-out to side of openings for utilities	2 1/8	54
14B Rear distance from cut-out to side of openings for utilities	3 1/2	89

MINIMUM CLEARANCES	IN	MM
Clearance to combustible construction – back*	17	432
Clearance to combustible construction – side*	9	229
Clearance to non-combustible construction – back*	5	127
Clearance to non-combustible construction – side*	5	127
Distance to additional appliances*	15	381

NOTE: \* CLEARANCES ARE MEASURED FROM APPLIANCE, NOT ACCESSORIES.  
REFERENCE OWNER'S MANUAL FOR INSTALLATION INSTRUCTIONS AND DEFINITIONS