


In a return to form, Citizen® embraces large format tiles. The timelessly classic concrete look is expressed through subtle brushed color variations of tans and grays. Visually arresting, Citizen® achieves an unencumbered chic aesthetic on floors, walls, and a wide array of surfaces.

CITIZEN®

Glazed Body Match Porcelain



FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR  POOL 

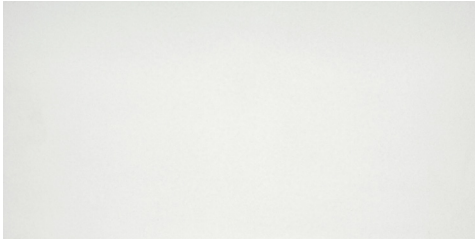

Civilian



Elector










Public



Resident (12x24 Only)



Subject

Sizes							
	24" x 48" 23.62" x 47.24"	24" x 24" 23.62" x 23.62"	12" x 24" 11.81" x 23.62"	12" x 12" Mesh	3" x 12" Floor SBN	6" x 12" Cove Base	1" x 6" Cove Base Corner Out
Thickness	10mm	8.8mm	8.8mm	10mm	10mm	10mm	10mm
Faces	12	15	30	N/A	N/A	20	20
Finish	Matte	Matte	Matte	Matte	Matte	Matte	Matte
Edge	Rectified	Rectified	Rectified	Cut	Cut/Rounded	Rectified	Rectified
Grout Joint Recommendation	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating
Results*	III	>500 lbf	Resistant	≤0.50%	>0.60 (M)	8	V2

Product and Installation Details | ANSI A108.02
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

*For more information visit www.emser.com. Always consult a professional for proper usage and installation.