


# SSPEX-C SERIES STAINLESS STEEL PEX COUPLING

## SPECIFICATION:

- For use with ASTM F2769, ASTM F2023, (PE-RT) SDR9 pipe
- For use with ASTM F876 PEX pipe
- Fittings are made to ASTM F1807 standard
- Maximum Pressure Rating: 200 PSI
- Temperature Range: Up to 400°F (204°C)

## CERTIFICATION:

- cUPC Listed
- NSF/ANSI 61 & 372 Certified

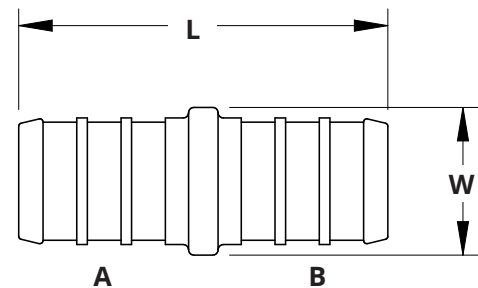

| MATERIAL LIST              |                        |
|----------------------------|------------------------|
| Name                       | Percent of Composition |
| <b>304 Stainless Steel</b> |                        |
| Iron (Fe)                  | 64.0 - 72.0            |
| Carbon (C)                 | 0.08 max               |
| Silicone (Si)              | 1.00 max               |
| Manganese (Mn)             | 2.00 max               |
| Phosphorus (P)             | 0.04 max               |
| Sulfur (S)                 | 0.04 max               |
| Chromium (Cr)              | 18.0 - 21.0            |
| Nickel (Ni)                | 8.0 - 11.0             |

| DIMENSIONS  |                   |      |        |       |        |       |        |       |
|-------------|-------------------|------|--------|-------|--------|-------|--------|-------|
| Part No.    | Nominal Pipe Size |      | L      |       | W      |       | Weight |       |
|             | A                 | B    | inches | mm    | inches | mm    | lbs    | grams |
| SSPEX-C05   | 1/2"              | 1/2" | 1.40   | 35.56 | 0.45   | 11.43 | 0.03   | 13.61 |
| SSPEX-C0705 | 3/4"              | 1/2" | 1.40   | 35.56 | 0.65   | 16.51 | 0.04   | 18.14 |
| SSPEX-C07   | 3/4"              | 3/4" | 1.40   | 35.56 | 0.65   | 16.51 | 0.04   | 18.14 |
| SSPEX-C1007 | 1"                | 3/4" | 1.55   | 39.37 | 0.85   | 21.59 | 0.07   | 31.75 |
| SSPEX-C10   | 1"                | 1"   | 1.75   | 41.91 | 0.85   | 21.59 | 0.08   | 36.29 |

**BOSHART**  
INDUSTRIES

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0  
Tel: 800-561-3164

[boshart.com](http://boshart.com) ♦ [blog.boshart.com](http://blog.boshart.com)