







NANCE 3 LIGHT PENDANT

6628003

General Product Information




WARRANTY



FCC STATEMENT

Tools Required



Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.
Install and use this product in adherence with local electrical codes and regulations.



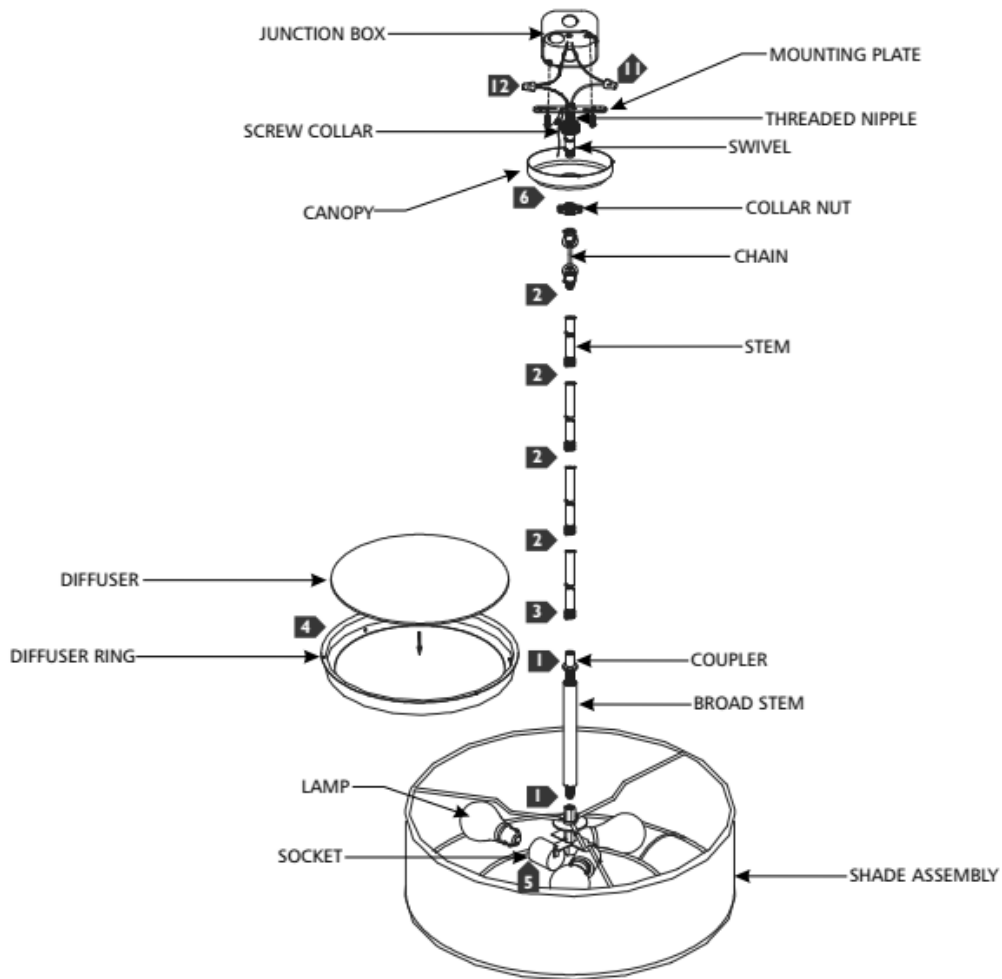

INSTRUCTIONS

I. Preparing the Fixture

1. Feed the fixture wires through the broad stem followed by the coupler and screw them onto the shade assembly.
2. Determine the wanted height or look of the fixture with the provided stems, swivel, and/or chain and assemble them by screwing them together. All parts may be used alone or in combination.
3. Feed the fixture wires through the stems and screw the assembly to a coupler.
4. Place the diffuser into the diffuser ring, then install the diffuser assembly into the shade by carefully sliding it into place.
5. Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.
6. Unscrew the collar nut off the screw collar and place it onto the stem followed by the canopy.
7. If necessary, screw the threaded nipple tightly onto the mounting plate.
8. Feed the fixture wires through the threaded nipple and screw the mounting plate assembly onto the stem/chain assembly.
9. Align and secure the mounting plate to the junction box.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around, or a house wire (green or bare copper wire without insulation).

3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) White fixture wire to neutral power line wire
 - b) Black fixture wire to hot power line wire
4. Neatly place all wires into the junction box, place the canopy onto the ceiling, and secure in place by screwing the collar nut tightly onto the screw collar.