JAMESON
A SPARTACO COMPANY

3/8” Good Buddy® Rodder

For 2-4” Conduit



Jameson offers a comprehensive Good Buddy® family to meet various applications for 3/8” rod:

Manhole-to-riser, riser-to-riser, cable vaults and large conduit runs.

- Recommended For Use In 2-4” Conduit
- .250 Core - 3/8 OD Rod
- 7” Bending Radius
- 1,000-lb Tensile/Pull Strength
- Accessory Kit, End Ferrule and Pulling Eye Included

Good BUDDY® Fiberglass Conduit Rodder
A SPARTACO System Product by JAMESON



GOOD BUDDY®

300’ - 400’



GOOD BUDDY®II

400’ - 600’



GOOD BUDDY®III

300’ - 400’



ACCESSORY KIT

Contents: End Ferrule, Splice Ferrule, Adhesive, Emery Cloth, Pouch Attaches to Rodder Frame for Easy Access (Included With Rodder)

Part Number	Good Buddy® Rodders
9-25-300M	300’ X 3/8” Good Buddy
9-25-400M	400’ X 3/8” Good Buddy
11A-25-400M	400’ X 3/8” Good Buddy II
11A-25-500M	500’ X 3/8” Good Buddy II
11A-25-600M	600’ X 3/8” Good Buddy II
9A-25-300M	300’ X 3/8” Good Buddy III
9A-25-400M	400’ X 3/8” Good Buddy III

All Good Buddy® conduit rodder models come standard with rod marked in 5’ increments. Add ‘MM’ to part number for metric measure (1m increments).

JAMESON
A SPARTACO COMPANY

3/8” Rodders



GOOD BUDDY®

Detach or Fold Frame For Transport Into Confined Areas

- 300’ and 400’ lengths
- Folds to 10” width for carrying into manholes
- Reel can be detached from frame
- Frame handle for easy transport
- Friction brake and safety roller feed
- Operates vertically or horizontally

29”H x 29”L x 27”W (Folds to 10” Width)



GOOD BUDDY®II

Increased Rod Length For Longer Runs

- 400’, 500’ and 600’ lengths
- Oversized wheels support weight of longer rod
- Frame handle and wheels for transport
- Friction brake and safety roller feed
- Operates vertically or horizontally

39”H x 32”L x 18”W




GOOD BUDDY®III

Smaller Frame For Maximum Portability

- 300’ and 400’ lengths
- Wheels and frame handle for transport
- Smaller frame size than GB or GB II
- Friction brake and safety roller feed
- Operates vertically or horizontally

34”H x 26.5”L x 15.5”W

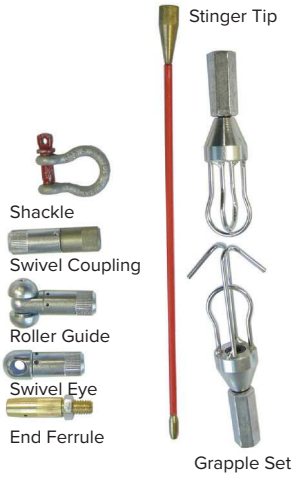



All Terrain Wheel

ACCESSORIES

Sold Separately

Part Number	Accessories	Thread 3/8” - 16 UNC
9-25-AK	Accessory Kit	End Ferrule, Splice Ferrule, Adhesive, Emery Cloth, Pouch
9-139	Swivel Eye	Attach pull line or grip to freely rotating eye
9-141	Roller Guide	Guides rod through bends, sweeps, misalignments, wires
11-142	Shackle Fitting	Use with Swivel Eye for larger pulling loop to attach Pulling Eye. **Must use 11-139 Swivel Eye.**
9-143	Swivel Coupling	Connect two rods when single length is not long enough; provides rotation when pulling line, wire or rope.
9-148	Rod Grapples	Connects two rodders from opposite directions
9-25-12ST	12” Stinger Tip	Guide rod through bends, sweeps, misalignments
9-25-24ST	24” Stinger Tip	
9-140	Splice Repair Kit	Splice Ferrule, Adhesive, Emery Cloth, Instructions
9-146	End Ferrule Repair	End Ferrule, Adhesive, Emery Cloth, Instructions
11A-AWK	AT Wheel Kit	Replacement All-Terrain Wheel Kit for Good Buddy II only