

Trendz™ takes fashion to a new level by combining sophisticated colors with subtle shimmer. The result is undeniably beautiful. From the warm almond to the contemporary steel gray, Trendz is sure to have a look to match any decor. Available in two sizes including a large 12x35 plank and is ideal for any room where a twist on traditional looks is desired.

TRENDZ™
Glazed Porcelain

FLOOR / WALL  RESIDENTIAL  COMMERCIAL  INDOOR  OUTDOOR  POOL 




White (12"x35" Only)






Steel

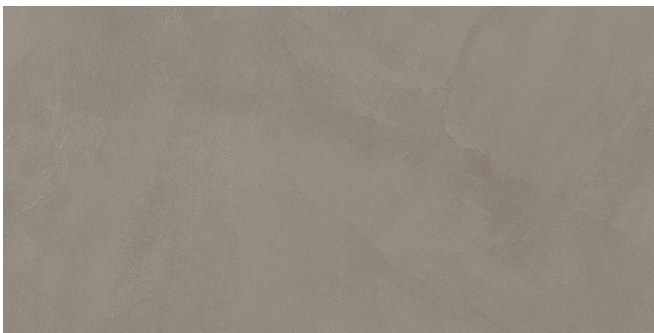

Almond




Taupe (12x24 Only)

| | | | | | | | |
|---|--|---|--|---|-----------------------------------|--------------------------|---------------------------|
| Sizes Thickness Faces Finish Edge Grout Joint Recommendation |  12"x35" 11.71"x35.3" |  12"x24" 11.71"x23.50" |  3"x12" Floor SBN | | | | |
| | 8mm | 9.5mm | Check Website | | | | |
| | 8 | 32 | N/A | | | | |
| | Matte | Matte | Matte | | | | |
| | Rectified | Rectified | Cut/Rounded | | | | |
| | 1/8" | 1/8" | 1/8" | | | | |
| Testing | Abrasion Resistance <small>C1027</small> | Breaking Strength <small>C648</small> | Chemical Resistance <small>C650</small> | Water Absorption <small>C373</small> | DCOF ANSI <small>A1371</small> | Scratch Hardness MOHS | Shade Variation Rating |
| Results* | II | >350 lbf | Resistant | <0.50% | >0.60 | 7 | V2 |

Product and Installation Details | ANSI A108.02
 Section 4.3.8.2 - For running bond/brick jointing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



 Sustainability Attributes

- Red List Free
- Health Product Declaration (HPD) provided upon request
- Product Packaging is 100% recyclable
- VOC Free

*For more information visit www.emser.com. Always consult a professional for proper usage and installation.

