



GE APPLIANCES

VARIABLE REFRIGERANT FLOW HEAT PUMP SYSTEM INDOOR UNIT

**MWAX060NE2AA**

**60K**  
BTH/h

**SUBMITTAL**

Job Name:

Approval:

Purchaser:

Date:

Submitted To:

Submitted By:


Construction:

Unit:

Reference:

Drawing #:

## MULTI-POSITION AIR HANDLER

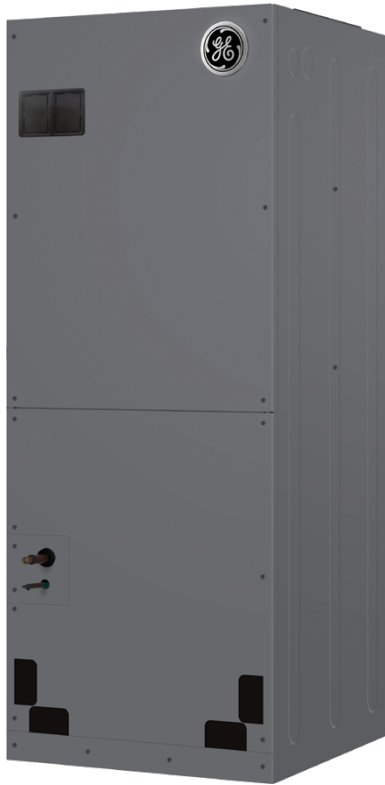

### Specifications

|                        |                                         |                    |
|------------------------|-----------------------------------------|--------------------|
| ODU                    | Marketing Model Name                    | MWAX060NE2AA       |
|                        | Nominal Capacity (Btu/h)                | 60,000             |
|                        | Dimension: H x W x D (in.)              | 57 x 24 3/4 x 21   |
|                        | Net Weight (lbs)                        | 192                |
|                        | Sound Level (dBA)                       | 77/76/73/70/68     |
|                        | Heating Capacity (Btu/h)                | 66,000             |
| Electrical             | Voltage (V / Ø / Hz)                    | 208-230/1/60       |
|                        | Minimum Circuit Ampacity (MCA)          | 6.9                |
|                        | Maximum Overcurrent Protection          | 15                 |
|                        | Running Current, Cooling                | 5.5                |
|                        | Running Current, Heating                | 5.5                |
| Fan                    | Type                                    | Forward Curved Fan |
|                        | Motor Type                              | DC                 |
|                        | Motor Output                            | 735 W              |
|                        | Number of Speeds                        | 3                  |
|                        | Airflow Rate, CFM (H/M/L)               | 2000/1588/1276     |
|                        | Airflow Rate, m <sup>3</sup> /h (H/M/L) | 3400/2700/2170     |
|                        | Ext. Static Pressure Max                | 0.9"               |
| Refrigerant and Piping | Refrigerant Type/Charge (oz.)           | R32 / -            |
|                        | Liquid Pipe O.D. (in)                   | 3/8                |
|                        | Gas Pipe O.D. (in)                      | 5/8                |

For more information visit us:

[GEAppliancesAirAndWater.com](https://GEAppliancesAirAndWater.com)

©Copyright 2026 GE Appliances, a Haier Company. GE is a trademark of the General Electric Company. Manufactured under trademark license. GE Appliances has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.




GE APPLIANCES  
a Haier company

**AIR&WATER**  
SOLUTIONS

Dimensions (unit: in.)

Return Air Opening (Inlet)  
Supply Air Opening (Outlet)

23 3/4\*11 2/3 inch  
17 7/8\*16 1/3 inch

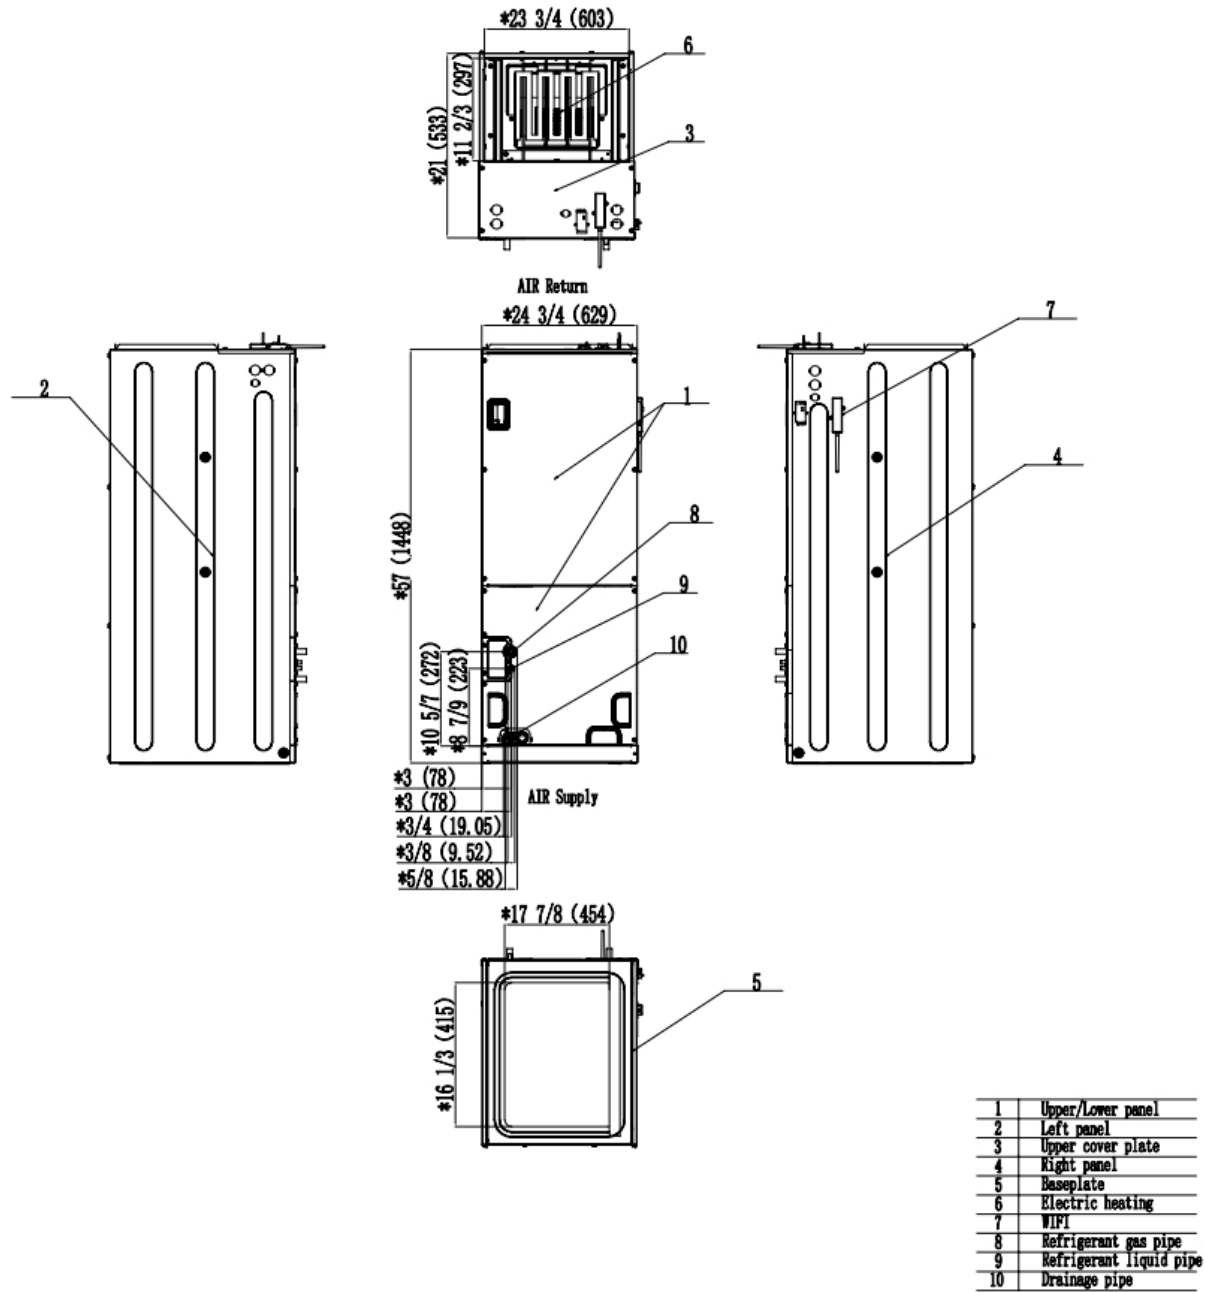

#### SUBMITTAL REVISION HISTORY

**05-08-26:** Submittal release.  
**08-20-26:** Specification update (Ext. Static Pressure Max).

For more information visit us:

[GEAppliancesAirAndWater.com](http://GEAppliancesAirAndWater.com)

©Copyright 2026 GE Appliances, a Haier Company. GE is a trademark of the General Electric Company. Manufactured under trademark license. GE Appliances has a policy of continuous improvement of its products and reserves the right to change materials and specifications without notice.



GE APPLIANCES  
a Haier company

**AIR&WATER**  
SOLUTIONS