

Alec Flush Mount

AF1072 1.0

VISUAL COMFORT & Co.

STUDIO COLLECTION

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer.


LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

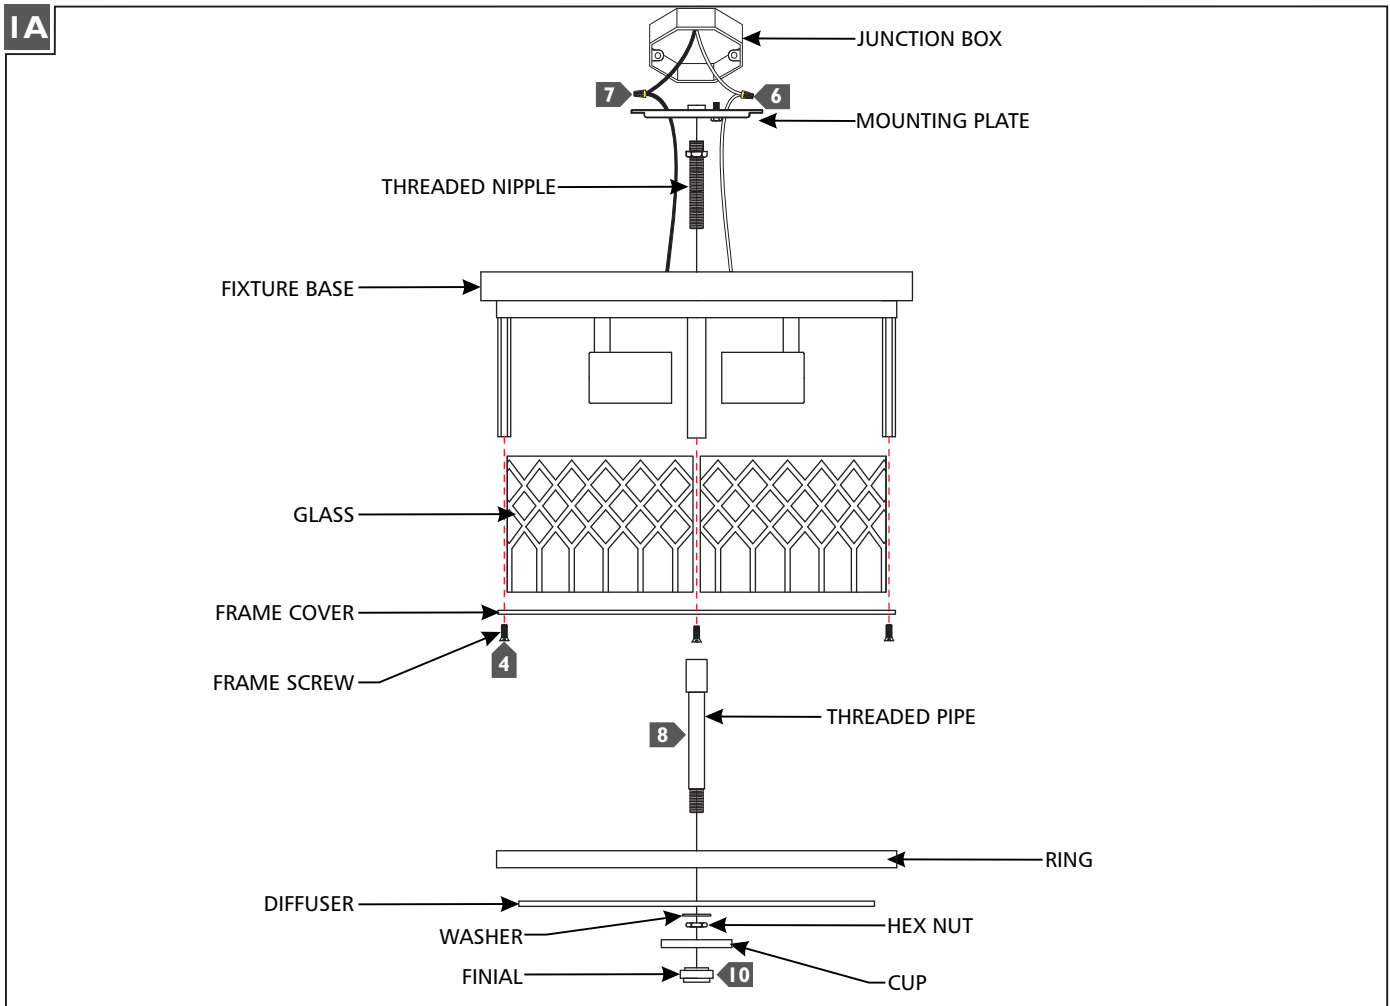

- 1** If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate.
- 2** Secure the mounting plate to the junction box.
- 3** Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage Information.
- 4** Insert the glass into the fixture frame, place the bottom frame on the upper frame, and secure the bottom frame to the fixture frame using the frame screws.
- 5** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 6** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 7** Connect the black fixture wire to the hot power line wire with a wire nut.
- 8** Place the fixture base onto the threaded nipple, then secure them in place by screwing the threaded pipe onto the nipple.
- 9** Place the ring, diffuser, and washer onto the threaded pipe, then secure them in place by screwing the hex nut onto the pipe. **Do not over-tighten.**
- 10** Place the cup onto the threaded pipe and secure it in place by screwing the finial onto the pipe. **Do not over-tighten.**

SAVE THESE INSTRUCTIONS!