

Lightology

lightology.com
866-954-4489
05-20-26

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **ELE892116**
Approved On: _____ Approved By: _____

Entra 3IN RD Adjustable IC New Construction Housing By Visual Comfort Architectural



Description

Entra is easy to configure with a complete feature set that offers flexibility without an overwhelming list of options. The 3 Inch Round Adjustable Downlight and Wall Wash IC New Construction Housing is offered with high (18 watt) or low (12 watt) output, four color temperature and Warm Dim (3000K - 1800K) options, and 20-40-65 degree interchangeable optics with hot aiming (30 degree tilt, 359 degree rotation). LED module ships with 40 degree optic installed. Adjust to 30 degree tilt for wall wash applications. 4 inch cut out. Dimmable with a Triac, electronic low voltage (ELV) or 0-10V dimmer, sold separately. ETL listed. Energy Star. Suitable for damp locations. Can be used to comply with CEC 2016 Title 24 Part 6. A complete fixture includes a housing and trim (with or without flange), sold separately

Specifications


COLOR N/A
BODY FINISH Black
WATTAGE 12W
DIMMER Low Voltage Electronic
DIMENSIONS 12.2"W x 3.5"H x 7.3"D
INTEGRATED LED MODULE 1 x LED/12W/120V LED

Technical Information

APERTURE SIZE 3.000"
APERTURE SHAPE Round
HOUSING HEIGHT 3.5"
HOUSING TYPE New construction IC Airtight
FUNCTION Adjustable Accent
LAMP LIFE 50000 hours
BEAM ANGLE 65°
COLOR RENDERING 90 CRI
LAMP COLOR 3000K Warm Dim
LUMENS/WATT 81.67
LUMINOUS FLUX 980 lumens



Shown in black

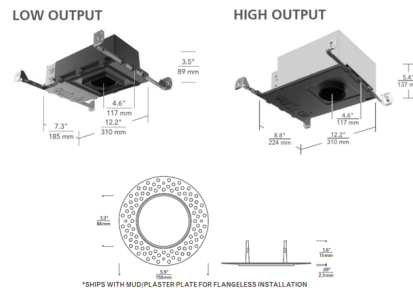

CLICK TO VIEW PRODUCT

Notes: