


Strainers

Recommended for a variety of water service lines including residential irrigation, commercial irrigation, swimming pools and water features. Strainers are designed to protect water control products, such as regulators and backflow preventers, by filtering sediment and debris that can cause premature failure.



Model YBXL

- Sizes: 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3"
- Furnished with 20 mesh stainless steel strainer screens
- Rated 400 psi WOG at 210°F
- FNPT or copper sweat connections
- 40, 60, 80 or 100 mesh screens available on special orders
- Model YBP includes closure plugs, as shown
- Lead-free bronze body construction

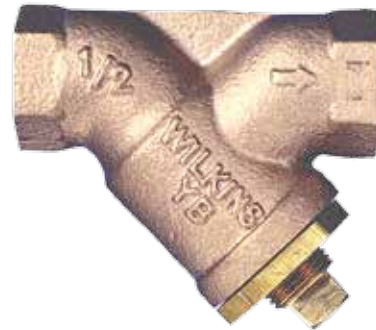

Model YBXL



Model SXL

- Sizes: 1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3"
- Furnished with 20 mesh stainless steel strainer screens and brass closure plug
- Rated 300 psi WOG at 210°F
- Lead-free bronze body construction



Model SXL



Model FSC

- Sizes: 2-1/2", 3", 4", 6", 8", 10"
- Class 125 lb. cast iron flanged wye type strainer
- ASTM A-126 Class B cast iron with blow-off connections and self-aligning cylindrical screens
- Perforated stainless steel screen
- Closure plug not furnished
- FDA epoxy coated
- Lead-free law compliant



Model FSC