
Denova<sup>™</sup> replicates the look of concrete with cool tones and a brushed linear texture. Available in four colors.





OUTDOOR



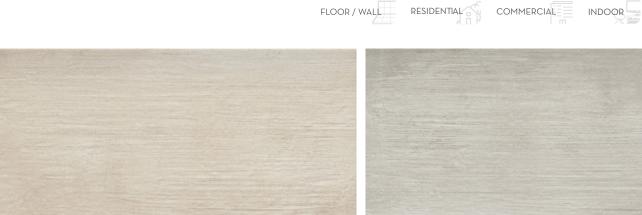

Harlem





Soho

Mosaics

Harlem

Soho

Tribeca

Sizes	12 <sup>"</sup> x24 <sup>"</sup> 12.01 <sup>°</sup> x24.02"	9"×36" 8,96"×36.02"		12"x12" Mesh	3 <sup>°</sup> x12 <sup>°′</sup> Floor SBN		
Thickness	8.2mm	9.2mm		7.8mm	8.2mm		
Faces	12	12		12	12		
Finish	Matte	Matte		Matte	Matte		
Edge	Pressed	Pressed		Rectified	Cut/Rounded		
Grout Joint Recommendation	3/16"	3/16"		3/16"	3/16"		
Testing	Abrasion Resistance	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A137.1	Scratch Hardness MOHS	Shade Variation Rating
Results*	IV	>325 lbf	Resistant	<0.50%	>0.42	7	V2

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 · For running bond/brick joing patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



Sustainability Attributes

Keu List Free
Health Droduct Doclaration (UDD) provide durate

Product Packaging is 100% recyclable

\*For more information visit www.emser.com. Always consult a professional for proper usage and installation.