

MIC® Tight-Buffered Cable, Plenum 12 F, Single-mode (OS2)



Part Number:
012E88-33131-29


Corning MIC® plenum cables are designed for use in plenum, riser and general purpose environments for intrabuilding backbone and horizontal installations. These multifiber cables use 900 µm buffered fibers to allow easy, consistent stripping and to facilitate termination. The fibers are surrounded by dielectric strength members and protected by a flame-retardant outer jacket. The all-dielectric cable construction requires no grounding or bonding. MIC plenum cables are ideal for routing inside buildings, within plenum areas and riser shafts, to the telecommunications rooms and workstations. The MIC plenum cables meet the application requirements of the National Electrical Code® (NEC®) Article 770 and are OFNP and FT-6 listed.

Features and Benefits


900 µm buffered fibers
Easy, consistent stripping

All-dielectric construction
Requires no grounding or bonding

Flame-retardant jacket
Rugged and durable

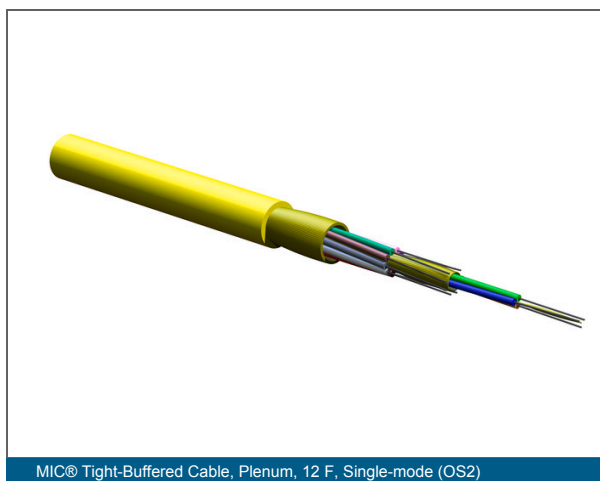

MIC® Tight-Buffered Cable, Plenum, 12 F, Single-mode (OS2)

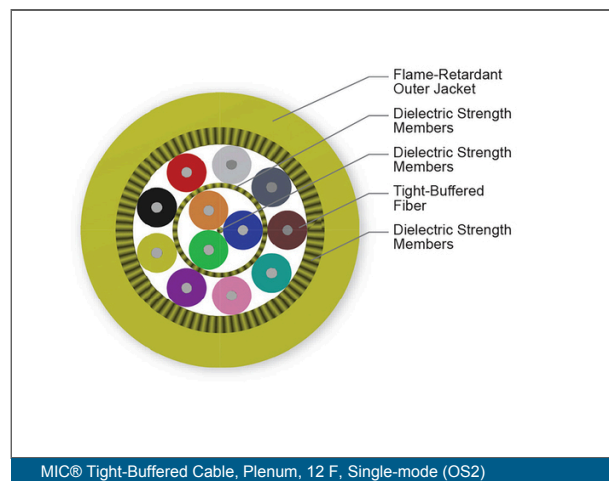

MIC® Tight-Buffered Cable, Plenum, 12 F, Single-mode (OS2)

MIC® Tight-Buffered Cable, Plenum 12 F, Single-mode (OS2)

CORNING

Specifications

General Specifications	
Cable Type	Tight-Buffered
Environment	Indoor
Product Type	Distribution
Fiber Category	Single-mode (OS2)
Flame Rating	Plenum (OFNP)
Application	General purpose, Horizontal, Plenum, Vertical Riser
Cable geometry	Round

Standards	
RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Approvals and Listings	National Electrical Code® (NEC®) OFNP, NFPA 262, CSA FT-6
Design and Test Criteria	ICEA S-83-596

Environmental Conditions	
Temperature Range, Installation	0 °C to 60 °C (32 °F to 140 °F)
Temperature Range, Operation	0 °C to 70 °C (32 °F to 158 °F)
Temperature Range, Storage	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design	
Central Element	Yarn
Fiber Count	12
Outer Jacket Color	Yellow
Outer Jacket Material	Flame-retardant
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members
Tensile Strength Elements and/or Armoring - Layer 2	Dielectric strength members

MIC® Tight-Buffered Cable, Plenum 12 F, Single-mode (OS2)

CORNING

Cable Design

Tight Buffer Color	Blue, Orange, Green
Tight Buffer Color, Layer 2	Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Flame Rating	Plenum (OFNP)

Mechanical Specifications

Max. Tensile Strength, Long-Term, ≤12F	132 N (29.67 lbf)
Max. Tensile Strength, Long-Term, >12F	200 N (44.96 lbf)
Max. Tensile Strength, Short-Term, ≤12F	440 N (98.92 lbf)
Max. Tensile Strength, Short-Term, >12F	660 N (148.37 lbf)
Min. Bend Radius Installation	92 mm (3.62 in)
Min. Bend Radius Operation	60 mm (2.36 in)
Nominal Outer Diameter	6 mm (0.24 in)

Optical Characteristics

Fiber Code	E
Fiber Name	SMF-28e+® fiber
Fiber Type	Single-mode
Performance Option Code	31
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.4 dB/km
Wavelengths	1310 nm / 1383 nm / 1550 nm
Fiber Category	G.652.D

Dimensions

Cable Weight	3.38 kg/km (2.27 lb/1000 ft)
Length	0 mm (0 in)

MIC® Tight-Buffered Cable, Plenum 12 F, Single-mode (OS2)

CORNING



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2025 Corning Optical Communications. All rights reserved.