



VITL

COMMERCIAL SURFACES



COMMERCIAL CATALOG | MADE IN USA | Edition 1

CONTENTS

MADE IN THE USA	4	LOOMED	52
ACCRA	6	LULWORTH	54
AEOLUS	8	MALTA	56
ALEXANDRIA	10	NORRIS	58
ALLOY	12	ORGANIC ROOTS	60
ARTE	14	OUTPOST	62
ASTICOU	16	PARKETTE	64
BENNINGTON	18	PENRHYN	66
BETHANY FALLS	20	PERSIA	68
BLYTHE	22	PRISM	70
CAMILLA	24	PURITY	72
CASCADE	26	RENAISSANCE	74
EARTHENWARE	28	RESTORATION	76
ECHO	30	RIFT	78
EVERETT	32	SCENIC	80
FONTANA	34	SERENITY	82
FOUNDATION Mosaics	36	SONDER	84
FOUNDATION Blends & Patterns	38	SPOTLIGHT	86
HAMPTON	40	SPOTLIGHT Gloss	88
HOMER	42	STARLING	90
IBIZA	44	THIS OR THAT	92
IRELAND	46	TREMAINE	94
KAVALA	48	WATSON	96
LEMNOS	50	WILLOUGHBY	98

WELCOME TO VITL SURFACES

Where curated design solutions, expert guidance, and a seamless process come together to create extraordinary results. Our approach is fresh, forward-thinking, and confidently built to help you bring your design vision to life with clarity and purpose.



At VITL, delivering the perfect surface solution isn't just our job, it's our passion. It's the details that bring your space to life. The defining element that transforms a project from functional to unforgettable. We offer a comprehensive range of products including tile, luxury vinyl tile (LVT), quartz, and a full range of setting materials, making VITL your single source for complete project solutions. From floor to wall to countertop, we bring design continuity, performance, and simplicity to every part of your project.

We don't simply distribute products, we curate them with commercial segments in mind. Our collections are hand-selected by our team of experts who understand what exceptional design requires and what commercial performance demands. Proven winners in both style and durability, every selection is chosen with intention for its quality, character, and ability to define a space.

As one of the leading surface distributors in the country, we partner with designers, specifiers, contractors, and project managers who are shaping the future of commercial design. Our knowledgeable team supports you at every stage from early concept to final installation offering expert guidance, design insight, and innovative tools that make sampling, sourcing, and ordering seamless.

VITL Surfaces offers a national reach with operational support from Artivo Surfaces, at a scale to deliver anywhere in the country on time and on budget. From boutique build-outs to national rollouts, we're your trusted partner for projects of every size.

MADE IN THE USA

When it comes to tile, where your material is sourced is just as important as the quality and beauty of the finished product. This catalog highlights a wide selection of porcelain and ceramic proudly manufactured in the United States.

Choosing domestically produced materials offers significant advantages beyond exceptional craftsmanship—it means faster shipping times, more reliable availability, and fewer supply chain disruptions. It also supports U.S. businesses and communities by creating local jobs and reinvesting in the economy. In addition, sourcing closer to home reduces transportation distances, resulting in a smaller carbon footprint and a more sustainable choice for your projects.

By selecting American-made tile, you're not only ensuring quality and performance but also making a positive impact on both the environment and the communities where we live and work.



BENEFITS



STATE OF THE ART MANUFACTURING
US manufacturers uphold strict quality standards, delivering products that are consistent, durable, and built to last.



FASTER PRODUCT AVAILABILITY
Products made domestically offer quicker shipping, steadier availability, and reduced risk of supply chain disruptions.



SUSTAINABILITY
Sourcing closer to home reduces transportation distances, resulting in a smaller carbon footprint.



SUPPORTING THE US ECONOMY
Strengthens US businesses and communities through job creation and economic reinvestment.



ACCRA

FLOOR & WALL | COLOR-BODY PORCELAIN | CONCRETE LOOK



White | VTL ARWH



Light Gray | VTL ARLG



Medium Gray | VTL ARMG

SIZE	FINISH
24" x 24" x 7.94mm Rectified	Matte Light Polished
12" x 24" x 7.94mm Rectified	Matte Light Polished

MOSAICS & TRIM	FINISH
3" x 24" Bullnose Rectified	Matte

NOTE:

This collection also offers additional sizes made in Mexico. Visit our website for more details.

TECHNICAL INFORMATION

	Made in USA
	Stock Ready Ship
	V2 Slight Variation
	DCOF ≥ 0.42

PERFORMANCE CHARACTERISTICS

Breaking Strength	>275 lbs
Chemical Resistance	Resistant
DCOF	≥ 0.42
Deep Scratch Resistance	N/A
Frost Resistance	N/A
Mohs Hardness	8
Water Absorption	$\leq 0.5\%$
Certifications	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior		

** Not defined by ANSI Standards

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

COMMON SEGMENTS

Corporate	Education
Government	Retail

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"



ACCRA | Medium Gray 24x24



AEOLUS

FLOOR & WALL | EXTERIOR WALL | COLOR-BODY PORCELAIN | LIMESTONE LOOK

				
White VTL ALWH	White 2x2 VTL ALWH MOS22	Beige Mix Arabesque VTL ALBM ARABESQ	Beige Mix Leaf VTL ALBM LEAF	Beige Mix Wave VTL ALBM WAVE
				
Beige VTL ALBG	Beige 2x2 VTL ALBG MOS22			
				
Light Gray VTL ALLG	Light Gray 2x2 VTL ALLG MOS22	Gray Mix Arabesque VTL ALGM ARABESQ	Gray Mix Leaf VTL ALGM LEAF	Gray Mix Wave VTL ALGM WAVE
				
Dark Gray VTL ALDG	Dark Gray 2x2 VTL ALDG MOS22			

SIZE	FINISH
24" x 48" x 8mm Rectified	Matte
32" x 32" x 10mm Rectified	Matte
16" x 32" x 8mm Rectified	Matte
12" x 24" x 8mm Rectified	Matte
3" x 12" x 8mm Rectified	Matte

MOSAICS & TRIM	FINISH
14" x 15" Wave Mosaic	Matte
13" x 15" Leaf Mosaic	Matte
12" x 15" Arabesque Mosaic	Matte
2" x 2" Mosaic	Matte
3" x 12" Bullnose	Matte

TECHNICAL INFORMATION

	Made in USA
	Ready Ship
	DCOF ≥0.42
	Greenguard

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥300 - ≥400 lbf
Chemical Resistance	Resistant
DCOF	≥ 0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	N/A
Water Absorption	≤ 0.4%
Certifications	Greenguard

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

COMMON SEGMENTS

Healthcare	Multi-Family	Residential
Retail	Senior Living	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"





ALEXANDRIA

FLOOR & WALL | EXTERIOR WALL | GLAZED COLOR-BODY PORCELAIN | MARBLE LOOK



White | VTL AXWH



White | 2x2 VTL AXWH MOS22M/P
White | 3x6 Brick VTL AXWH BRICKM/P



Ivory | VTL AXIV



Ivory | 2x2 VTL AXIV MOS22M/P
Ivory | 3x6 Brick VTL AXIV BRICKM/P



Beige | VTL AXBE



Beige | 2x2 VTL AXBE MOS22M/P
Beige | 3x6 Brick VTL AXBE BRICKM/P



Light Gray | VTL AXLG



Light Gray | 2x2 VTL AXLG MOS22M/P
Light Gray | 3x6 Brick VTL AXLG BRICKM/P



Dark Gray | VTL AXDG



Dark Gray | 2x2 VTL AXDG MOS22M/P
Dark Gray | 3x6 Brick VTL AXDG BRICKM/P

SIZE	FINISH
24" x 48" x 8mm Rectified	Matte Polished
24" x 24" x 8mm Rectified	Matte Polished
12" x 24" x 8mm Rectified	Matte Polished

MOSAICS & TRIM	FINISH
3" x 6" Brick Mosaic Rectified	Matte Polished
2" x 2" Mosaic Rectified	Matte Polished
3" x 24" Bullnose Rectified	Matte Polished

ALEXANDRIA | White 12x24

TECHNICAL INFORMATION

 Made in USA
 Ready Ship
 V3 Moderate Variation
 DCOF ≥ 0.42
 Greenguard Bureau Veritas NSF EPD

PERFORMANCE CHARACTERISTICS

Finish	Matte	Polished
Breaking Strength	$\geq 275\text{lb}$	$\geq 400\text{lb}/\text{ft}^2$
Chemical Resistance	Resistant	Resistant
DCOF	≥ 0.42	> 0.42
Deep Scratch Resistance	N/A	N/A
Frost Resistance	Resistant	Resistant
Mohs Hardness	N/A	N/A
Water Absorption	$\leq 0.5\%$	$\leq 0.4\%$
Certifications	Greenguard Bureau Veritas NSF EPD	

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

RECOMMENDED GROUT JOINT

Rectified | 1/8" Non-Rectified | 3/16"

COMMON SEGMENTS

Corporate	Multi-Family
Religious	Residential

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.





ALLOY

FLOOR & WALL | GLAZED COLOR-BODY PORCELAIN | METAL LOOK



White | VTL AYWH



White | 2x2
VTL AYWH MOS22



White | Peacock
VTL AYWH PEACOCK



Beige | VTL AYBE



Beige | 2x2
VTL AYBE MOS22



Beige | Peacock
VTL AYBE PEACOCK



Taupe | VTL AYTA



Taupe | 2x2
VTL AYTA MOS22



Taupe | Peacock
VTL AYTA PEACOCK



Black | VTL AYBK



Black | 2x2
VTL AYBK MOS22



Black | Peacock
VTL AYBK PEACOCK

SIZE FINISH

24" x 48" x 9mm Rectified

Matte

12" x 24" x 9mm

Matte

MOSAICS & TRIM FINISH

12" x 13" Peacock Mosaic

Matte

2" x 2" Mosaic

Matte

3" x 24" Bullnose

Matte

6" x 12" Covebase

Matte

TECHNICAL INFORMATION



Made in USA



Stock | Ready Ship



V2 Slight Variation



DCOF ≥ 0.42

PERFORMANCE CHARACTERISTICS

Breaking Strength ≥ 350 lbf

Chemical Resistance Unaffected

DCOF > 0.42

Deep Scratch Resistance N/A

Frost Resistance Resistant

Mohs Hardness N/A

Water Absorption $\leq 0.5\%$

Certifications N/A

TILE APPLICATION

AREA WALL FLOOR

Residential • •

Commercial • •

Heavy Commercial •

Exterior

** Not defined by ANSI Standards

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

COMMON SEGMENTS

Corporate Healthcare Hospitality

Restaurant Senior Living

RECOMMENDED GROUT JOINT

Rectified 1/8"

Non-Rectified 3/16"




ALLOY | Beige 12x24 and White Peacock Mosaic



ARTE | Gray 12x24

ARTE

FLOOR & WALL | EXTERIOR WALL | GLAZED COLOR-BODY PORCELAIN | METAL LOOK

 Gray VTL AEGR	 Gray 2x2 VTL AEGR MOS22R	 Gray 9x10 Hex VTL AEGR HEXAGON	 Dark Gray VTL AEDG	 Dark Gray 2x2 VTL AEDG MOS22R
 Light Brown VTL AELB	 Light Brown 2x2 VTL AELB MOS22R	 Light Brown 9x10 Hex VTL AELB HEXAGON	 Brown VTL AEBR	 Brown 2x2 VTL AEBR MOS22R
 White VTL AEWH	 White 2x2 VTL AEWH MOS22R	 White 9x10 Hex VTL AEWH HEXAGON		

SIZE	FINISH
24" x 24" x 9mm Rectified	Matte
12" x 24" x 9mm Rectified	Matte
9" x 10" x 9mm Hexagon	Matte

MOSAICS & TRIM	FINISH
2" x 2" Mosaic Rectified	Matte
3" x 24" Bullnose Rectified	Matte
6" x 12" Cove Base Rectified	Matte

TECHNICAL INFORMATION

-  Made in USA
-  Stock | Ready Ship
-  V1 Uniform Appearance
-  DCOF ≥0.42
-  VOC Free | Green Squared

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥250 lbf
Chemical Resistance	Resistant
DCOF	≥ 0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	N/A
Water Absorption	≤ 0.5%
Certifications	VOC Free Green Squared

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

COMMON SEGMENTS

Corporate	Education
Government	Retail

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"





ASTICOU | Birch 8x48

ASTICOU

FLOOR & WALL | EXTERIOR WALL | GLAZED COLOR-BODY PORCELAIN | WOOD LOOK

 Oak VTL ASOA	 Oak Herringbone VTL ASOA HERRING	 Birch VTL ASBI	 Birch Herringbone VTL ASBI HERRING
 Ash VTL ASAS	 Ash Herringbone VTL ASAS HERRING	 Teak VTL ASTE	 Teak Herringbone VTL ASTE HERRING
 Walnut VTL ASWA	 Walnut Herringbone VTL ASWA HERRING		
 Ash & Oak Cassetone VTL ASAO 2424DECO	 Birch & Teak Cassetone VTL ASBT 2424DECO	 Birch, Teak & Walnut Cassetone VTL ASBW 2424DECO	 Teak & Walnut Cassetone VTL ASTW 2424DECO

SIZE	FINISH
12" x 48" x 20mm Outdoor Rectified	Matte
8" x 48" x 8mm Rectified	Matte
6" x 36" x 10mm Rectified	Matte

MOSAICS & TRIM	FINISH
12" x 15" Herringbone Mosaic Rectified	Matte
24" x 24" Cassetone Decor Rectified	Matte

TECHNICAL INFORMATION

-  Made in USA
-  Ready Ship
-  V3 Moderate Variation
-  V4 Substantial Variation
-  DCOF ≥0.42
-  Greenguard | Bureau Veritas | NSF EPD

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥ 400 lb/ft ²
Chemical Resistance	Resistant
DCOF	≥ 0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	N/A
Water Absorption	≤ 0.5%
Certifications	Greenguard Bureau Veritas NSF EPD

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

COMMON SEGMENTS

Government	Hospitality
Multi-Family	Restaurant

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.





BENNINGTON

FLOOR & WALL | PORCELAIN | SLATE LOOK




Gray | VTL BNGY



Gray | 2x2
VTL BNGY MOS22



Black | VTL BNBK



Black | 2x2
VTL BNBK MOS22



Bronze | VTL BNBZ



Bronze | 2x2
VTL BNBZ MOS22

SIZE FINISH

12" x 24" x 8.2mm Rectified

Matte

MOSAICS & TRIM FINISH

2" x 2" Mosaic

Matte

4" x 12" Bullnose

Matte

3" x 12" Bullnose Rectified

Matte

TECHNICAL INFORMATION



Made in USA



Stock



V3 Moderate Variation



DCOF ≥ 0.42

PERFORMANCE CHARACTERISTICS

Breaking Strength ≥ 325lbs

Chemical Resistance Class A

DCOF ≥ 0.42

Deep Scratch Resistance N/A

Frost Resistance Resistant

Mohs Hardness N/A

Water Absorption ≤ 0.5%

Certifications N/A

TILE APPLICATION

AREA WALL FLOOR

Residential • •

Commercial • •

Heavy Commercial •

Exterior

** Not defined by ANSI Standards

COMMON SEGMENTS

Government Multi-Family

Residential Retail

RECOMMENDED GROUT JOINT

Rectified 1/8"

Non-Rectified 3/16"

*Not all sizes/trims are available in all colors and finishes, scan QR code for product details.



BENNINGTON | Black 12x24



BETHANY FALLS | Gray 24x48

BETHANY FALLS

FLOOR & WALL | GLAZED COLOR-BODY PORCELAIN | LIMESTONE LOOK



White | VTL BTWH



White | 2x2
VTL BTWH MOS22



White | Chevron
VTL BTWH CHEVRON



Gray | VTL BTGY



Gray | 2x2
VTL BTGY MOS22



Gray | Chevron
VTL BTGY CHEVRON



Beige | VTL BTBE



Beige | 2x2
VTL BTBE MOS22



Beige | Chevron
VTL BTBE CHEVRON




Taupe | VTL BTTA



Taupe | 2x2
VTL BTTA MOS22



Taupe | Chevron
VTL BTTA CHEVRON



Black | VTL BTBK



Black | 2x2
VTL BTBK MOS22



Black | Chevron
VTL BTBK CHEVRON

SIZE	FINISH
24" x 48" x 9.5mm Rectified	Matte Light Polished
24" x 24" x 9.5mm Rectified	Matte Light Polished
12" x 24" x 9.5mm Rectified	Matte Light Polished
12" x 24" x 9.5mm Textured Rect.	Bush-Hammered

MOSAICS & TRIM	FINISH
12" x 13" Chevron Mosaic Mixed	Mixed Finishes
2" x 2" Mosaic	Matte
3" x 24" Bullnose Rectified	Matte Light Polished
6" x 12" Cove Base	Matte
1" x 6" Cove Base Out Corner	Matte

TECHNICAL INFORMATION

	Made in USA
	Ready Ship
	V3 Moderate Variation
	DCOF Matte ≥ 0.42 DCOF Bush-Hammered ≥ 0.60

PERFORMANCE CHARACTERISTICS

Breaking Strength	> 275 lbs
Chemical Resistance	Resistant
DCOF	Light Polished N/A Matte ≥ 0.42 Bush-Hammered ≥ 0.60
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	7
Water Absorption	< 0.50%
Certifications	Green Squared

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior		

** Not defined by ANSI Standards

COMMON SEGMENTS

Corporate	Education	Government
Hospitality	Restaurant	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.





BLYTHE

FLOOR & WALL | EXTERIOR WALL | PORCELAIN | MARBLE LOOK



White | VTL BYWH



White | 2x4 VTL BYWH MOS24L White | 1x6 VTL BYWH MOS16L




Gold | VTL BYGD



Gold | 2x4 VTL BYGD MOS24L Gold | 1x6 VTL BYGD MOS16L




Beige | VTL BYBE

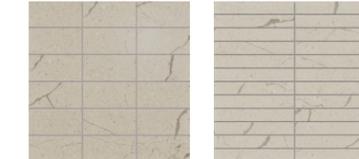

Beige | 2x4 VTL BYBE MOS24L Beige | 1x6 VTL BYBE MOS16L




Light Gray | VTL BYLG

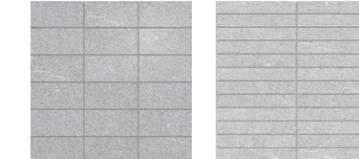

Light Gray | 2x4 VTL BYLG MOS24L Light Gray | 1x6 VTL BYLG MOS16L




Bronze | VTL BYBZ

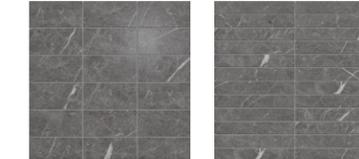

Bronze | 2x4 VTL BYBZ MOS24L Bronze | 1x6 VTL BYBZ MOS16L



Black | VTL BYBK

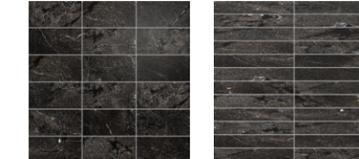

Black | 2x4 VTL BYBK MOS24L Black | 1x6 VTL BYBK MOS16L

SIZE	FINISH
24" x 48" x 10.5mm Leather Rectified	Matte
12" x 24" x 9.5mm Textured Exterior Rectified	Bush-Hammered
12" x 24" x 9.5mm Leather	Matte

MOSAICS & TRIM	FINISH
2" x 4" Mosaic Leather	Matte
1" x 6" Mosaic Leather	Matte
4" x 24" Bullnose Leather	Matte
6" x 12" Cove Base Unpolished	Matte

TECHNICAL INFORMATION

	Made in USA
	Stock Ready Ship
	V3 Moderate Variation
	DCOF 0.50 - 0.60
	Green Squared

PERFORMANCE CHARACTERISTICS

Breaking Strength	> 450lbf
Chemical Resistance	Resistant
DCOF	0.50 - 0.60
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	7
Water Absorption	< 0.50%
Certifications	Green Squared

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

COMMON SEGMENTS

Corporate	Hospitality	Religious
Restaurant	Retail	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"



BLYTHE | Beige and Bronze 24x48 and Bronze 1x6 Mosaic



CAMILLA | White 12x24

CAMILLA

FLOOR & WALL | EXTERIOR WALL | GLAZED COLOR-BODY PORCELAIN | MARBLE LOOK



White | VTL CAWH



White | 3x3 Hexagon VTL CAWH HEX | White | Listello VTL CAWH LIST312P



Beige | VTL CABE



Beige | 3x3 Hexagon VTL CABE HEX | Beige | Listello VTL CABE LIST312P



Brown | VTL CABR




Brown | 3x3 Hexagon VTL CABR HEX | Brown | Listello VTL CABR LIST312P




Grey | VTL CAGR



Grey | 3x3 Hexagon VTL CAGR HEX | Gray | Listello VTL CAGR LIST312P

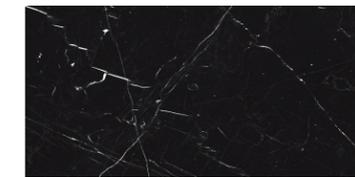

Black | VTL CABL

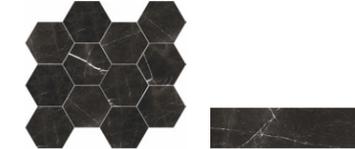

Black | 3x3 Hexagon VTL CABL HEX | Black | Listello VTL CABL LIST312P

SIZE	FINISH
24" x 48" x 8mm Rectified	Matte Polished
24" x 24" x 8mm Rectified	Matte Polished
12" x 24" x 8mm Rectified	Matte Polished
12" x 12" x 8mm Rectified	Matte Polished

MOSAICS & TRIM	FINISH
3" x 3" Hexagon Mosaic Rectified	Matte Polished
3" x 12" Listello Rectified	Polished
3" x 12" Bullnose Rectified	Matte Polished

TECHNICAL INFORMATION

	Made in USA
	Stock Ready Ship
	V3 Moderate Variation
	DCOF ≥ 0.42
	Greenguard Bureau Veritas NSF EPD

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥ 400 lb/ft ²
Chemical Resistance	Resistant
DCOF	≥ 0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	≥ 7
Water Absorption	$\leq 0.4\%$
Certifications	Greenguard Bureau Veritas NSF EPD

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

COMMON SEGMENTS

Hospitality	Multi-Family
Residential	Restaurant

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

*Not all sizes/trims are available in all colors and finishes, scan QR code for product details.





CASCADE

FLOOR & WALL | EXTERIOR WALL | GLAZED COLOR-BODY PORCELAIN | TRAVERTINE LOOK



SIZE	FINISH
12" x 24" x 9mm Rectified	Matte
6" x 24" x 9mm Rectified	Matte

MOSAICS & TRIM	FINISH
2" x 2" Mosaic	Matte
1" x 4" Herringbone Mosaic	Matte
3" x 24" Bullnose Rectified	Matte
6" x 12" Covebase	Matte

TECHNICAL INFORMATION

	Made in USA
	Stock Ready Ship
	V2 Slight Variation
	DCOF ≥ 0.42

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥ 400 lbs
Chemical Resistance	Resistant
DCOF	> 0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	N/A
Water Absorption	$\leq 0.5\%$
Certifications	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

COMMON SEGMENTS

Corporate	Education	Healthcare
Hospitality	Multi-Family	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.



CASCADE | Beige 12x24



EARTHENWARE

FLOOR & WALL | EXTERIOR WALL | PORCELAIN | LIMESTONE LOOK



Cirrus | VTL EWCI



Cirrus | 2x2
VTL EWCI MOS22



Cirrus | Split Hex
VTL EWCI SPLITHEX




Cumulus | VTL EWCU




Cumulus | 2x2
VTL EWCU MOS22



Cumulus | Split Hex
VTL EWCU SPLITHEX



Stratus | VTL EWST




Stratus | 2x2
VTL EWST MOS22



Stratus | Split Hex
VTL EWST SPLITHEX



Nimbus | VTL EWNI



Nimbus | 2x2
VTL EWNI MOS22



Nimbus | Split Hex
VTL EWNI SPLITHEX

SIZE FINISH

24" x 48" x 9mm Rectified

Matte

12" x 24" x 9mm

Matte

MOSAICS & TRIM FINISH

2" x 2" Mosaic

Matte

9" x 10" Split Hex Mosaic

Matte

3" x 24" Bullnose

Matte

6" x 12" Cove Base

Matte

TECHNICAL INFORMATION



Made in USA



Stock | Ready Ship



V3 Moderate Variation



DCOF ≥ 0.42



Greenguard | VOC Free | HPD | EPD

PERFORMANCE CHARACTERISTICS

Breaking Strength ≥ 350 lbf

Chemical Resistance Resistant

DCOF ≥ 0.42

Deep Scratch Resistance N/A

Frost Resistance Resistant

Mohs Hardness N/A

Water Absorption $\leq 0.5\%$

Certifications Greenguard | VOC Free | HPD | EPD

TILE APPLICATION

AREA WALL FLOOR

Residential • •

Commercial • •

Heavy Commercial •

Exterior •

** Not defined by ANSI Standards

*Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

COMMON SEGMENTS

Corporate Government Healthcare

Multi-Family Senior Living

RECOMMENDED GROUT JOINT

Rectified 1/8"

Non-Rectified 3/16"



EARTHENWARE | Cumulus 24x48



ECHO | Betula 8x48

ECHO

FLOOR & WALL | EXTERIOR WALL | COLOR-BODY PORCELAIN | WOOD LOOK



Helia | VTL EC HL



Drys | VTL EC DR



Betula | VTL EC BT



Pitys | VTL EC PT



Carya | VTL EC CR



Tectona | VTL EC TC

SIZE

8" x 48" x 8mm Rectified

FINISH

Matte

TECHNICAL INFORMATION



Made in USA



Ready Ship



DCOF ≥ 0.42



Carbon Neutral

PERFORMANCE CHARACTERISTICS

Breaking Strength ≥ 400 lbs

Chemical Resistance N/A

DCOF ≥ 0.42

Deep Scratch Resistance N/A

Frost Resistance Resistant

Mohs Hardness N/A

Water Absorption ≤ 0.4%

Certifications Carbon Neutral

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

*Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

COMMON SEGMENTS

Corporate Education

Multi-Family Retail

RECOMMENDED GROUT JOINT

Rectified 1/8"

Non-Rectified 3/16"





EVERETT

FLOOR & WALL | EXTERIOR WALL | GLAZED COLOR-BODY PORCELAIN | CONCRETE LOOK




White | VTL EVWH



White | 2x2
VTL EVWH MOS22



Beige | VTL EVBE



Beige | 2x2
VTL EVBE MOS22



Light Gray | VTL EVLG



Light Gray | 2x2
VTL EVLG MOS22



Dark Gray | VTL EVDG



Dark Gray | 2x2
VTL EVDG MOS22

SIZE FINISH

24" x 47" x 9mm Rectified	Matte
24" x 24" x 9mm Rectified	Matte
12" x 24" x 9mm Rectified	Matte
6" x 24" x 9mm Rectified	Matte

MOSAICS & TRIM FINISH

12" x 12" Decorative	Matte
2" x 2" Mosaic	Matte
3" x 24" Bullnose Rectified	Matte
6" x 12" Covebase Rectified	Matte

TECHNICAL INFORMATION

	Made in USA
	Stock Import
	V2 Slight Variation
	DCOF ≥ 0.42
	HPD LEED

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥ 400 lbs
Chemical Resistance	Resistant
DCOF	> 0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	N/A
Water Absorption	$\leq 0.5\%$
Certifications	HPD LEED

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

COMMON SEGMENTS

Corporate	Education	Healthcare
Multi-Family	Residential	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"



EVERETT | Light Gray 12x24



FONTANA | White 12x24 and Fluted

FONTANA

FLOOR & WALL | COLOR-BODY PORCELAIN | TRAVERTINE LOOK



White | VTL FNWH



White | Fluted
VTL FNWH FLUTE



White | 1x4
VTL FNWH MOS14



Taupe | VTL FNTA



Taupe | Fluted
VTL FNTA FLUTE



Taupe | 1x4
VTL FNTA MOS14



Gray | VTL FNGY



Gray | Fluted
VTL FNGY FLUTE



Gray | 1x4
VTL FNGY MOS14

SIZE FINISH

24" x 48" x 7.94mm

Matte

12" x 24" x 7.94mm

Matte

MOSAICS & TRIM FINISH

1" x 4" Mosaic

Matte

12" x 24" Fluted Decorative

Matte

3" x 24" Bullnose

Matte

1" x 12" Jolly

Matte

TECHNICAL INFORMATION



Made in USA



Ready Ship



V4 Substantial Variation



DCOF ≥ 0.42

PERFORMANCE CHARACTERISTICS

Breaking Strength > 275lbs

Chemical Resistance Resistant

DCOF > 0.42

Deep Scratch Resistance N/A

Frost Resistance N/A

Mohs Hardness 8

Water Absorption < 0.5%

Certifications N/A

TILE APPLICATION

AREA WALL FLOOR

Residential • •

Commercial • •

Heavy Commercial •

Exterior

** Not defined by ANSI Standards

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

COMMON SEGMENTS

Healthcare Hospitality Multi-Family

Retail Senior Living

RECOMMENDED GROUT JOINT

Rectified 1/8"



Non-Rectified 3/16"








FOUNDATION | Mosaics

FLOOR & WALL | UNGLAZED & UNGLAZED THROUGH-BODY PORCELAIN | SOLID LOOK

COLORS

											
Ice VTL FOIC	Lace Speckled VTL FOSL	Linen VTL FOLI	Linen Speckled VTL FOLK	Dune VTL FODU	Buff VTL FOBF	Buff Speckled VTL FOBK	Enlightened VTL FOEN	Granite Speckled VTL FOGN	Neutral VTL FONT		
											
Stern VTL FOSN	Smoke VTL FOSM	Smoke Speckled VTL FOSK	Storm VTL FOSR	Storm Speckled VTL FOTK	Shadow VTL FOSH	Black VTL FOBL	Sage VTL FOSG	Ardor VTL FOAD	Regal VTL FORG		
											
Renew VTL FORN	Crisp VTL FOCR	Turquoise VTL FOTU	Ocean VTL FOOC	Sky VTL FOSY	Blue VTL FOBU	Blue Speckled VTL FOBS	Sea VTL FOSE	Indigo VTL FOIN	Indigo Speckled VTL FOIK		
				<p>All colors are available in 1x1 and 2x2 size and can be ordered in patterns and blends on a made to order basis. All other sizes are available in select colors and can be ordered in patterns and blends on a made to order basis. Visit our website or contact your local VITL sales representative for complete product information.</p>							
Red VTL FORE	Orange VTL FOOR	Yellow VTL FOYE	Pear VTL FOPE								

SIZES

				
2" x 2" Mosaic	2" Hexagon Mosaic	1" x 1" Mosaic	1" Hexagon Mosaic	1" Penny Round Mosaic



FOUNDATION | Blue, Ice and Orange 1x1 Mosaic

SIZE	FINISH
2" x 2" x 6.35mm Mosaic	Matte
2" x 2" x 6.35mm Hexagon Mosaic	Matte
1" x 1" x 6.35mm Mosaic	Matte
1" x 1" x 6.35mm Hexagon Mosaic	Matte
1" x 1" x 6.35mm Penny Round Mosaic	Matte

MOSAICS & TRIM	FINISH
2" x 2" Bullnose	Matte
2" x 2" Bullnose In & Out Corner	Matte
2" x 2" Cove Base	Matte
2" x 2" Universal Cove Base Corner	Matte
2" x 2" Wrap-Around Bullnose Stretcher Cap	Matte
2" x 2" Wrap-Around Bullnose Out Corner	Matte
1" x 2" Left & Right Cove Base Corner	Matte
1" x 2" Pool Nosing	Matte
1" x 1" Bullnose	Matte
1" x 1" Bullnose Corner	Matte
1" x 1" Cove Base	Matte
1" x 1" Cove Base In Corner Square	Matte
1" x 1" Cove Base In Corner Round	Matte
1" x 1" Wrap-Around Bullnose Stretcher Cap	Matte
6" x 8" Square Top Built Up Cove Base	Matte
6" x 8" Round Top Built Up Cove Base	Matte
5" x 8" Round Top Built Up Cove Base	Matte

TECHNICAL INFORMATION

	Made in USA
	Stock Ready Ship
	DCOF ≥0.42
	V2 Slight Variation
	V4 Substantial Variation

PERFORMANCE CHARACTERISTICS

Breaking Strength	>300 lbs
Chemical Resistance	Resistant
DCOF	> 0.42
Deep Scratch Resistance	N/A
Frost Resistance	N/A
Mohs Hardness	7 - 8
Water Absorption	<0.5
Certifications	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	•
Exterior		

** Not defined by ANSI Standards

COMMON SEGMENTS

Corporate	Education
Healthcare	Hospitality

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.




FOUNDATION | Blends & Patterns



FLOOR & WALL | UNGLAZED THROUGH-BODY PORCELAIN | SOLID LOOK


BLENDS




Unity Blend | VTL FOUN
Ice | Linen | Enlightened




Alabaster Blend | VTL FOAL
Linen | Buff | Stern




Steadfast Blend | VTL FOSF
Smoke | Smoke Speckled | Enlightened




Fossil Blend | VTL FOFO
Ice | Shadow | Storm | Smoke




Assured Black Blend | VTL FOAS
Storm Speckled | Black | Shadow




Dreamy Blend | VTL FODR
Renew | Ocean | Turquoise



Ideal Blend | VTL FOID
Crisp | Indigo | Ice




Calm Blend | VTL FOCL
Sky | Neutral | Indigo




Delight Blend | VTL FODE
Blue | Blue Speckled


PATTERNS




1" Honeycomb | Black & White
VTL FOBW HONEY
38% Smoke & 62% White




Honeycomb | Smoke & White
VTL FOSW HONEY
38% Black & 62% White




1" Hex | Gradient Blend
VTL FOGD HEX
38% White, 34% Smoke, 28% Black



1" Hex | Smoke & White
VTL FOSW HEX
50% Smoke & 50% White




1" Diamond Hex | Gradient Blend
VTL FOGD DIAHEX
45% White, 22% Smoke, 33% Black




2" Hex | Black & White
VTL FOBW HEX2
13% Black & 87% White




1" Hex | Black & White
VTL FOBW HEX
13% Black & 87% White




1" Penny Round | Black & White
VTL FOBW PENNY
7% Black & 93% White




1" Floral Penny Round Black & White
VTL FOBW FLORAL
17% Black & 83% White



1" Diamond Penny Round | Black & White
VTL FOBW DIARND
53% Black & 47% White



Windmill Black & White
VTL FOBW WIND
89% White & 11% Black



Windmill Linen & Black
VTL FOLB WIND
89% Linen & 11% Black



FOUNDATION | Gradient Blend 1" Hexagon Mosaic

BLENDS	FINISH
1" x 1" x 6.35mm Mosaic	Matte

PATTERNS	FINISH
2" x 2" x 6.35mm Hexagon Mosaic	Matte
1" x 1" x 6.35mm Honeycomb Mosaic	Matte
1" x 1" x 6.35mm Hexagon Mosaic	Matte
1" x 1" x 6.35mm Penny Round Mosaic	Matte
12" x 24" x 6.35mm Windmill Mosaic	Matte

TECHNICAL INFORMATION

Made in USA
Stock Ready Ship
DCOF ≥0.42
V4 Substantial Variation

PERFORMANCE CHARACTERISTICS

Breaking Strength	>300 lbs
Chemical Resistance	Resistant
DCOF	> 0.42
Deep Scratch Resistance	N/A
Frost Resistance	N/A
Mohs Hardness	7 - 8
Water Absorption	<0.5
Certifications	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	•
Exterior		

** Not defined by ANSI Standards

COMMON SEGMENTS

Corporate	Education
Healthcare	Hospitality

RECOMMENDED GROUT JOINT	
Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.





HAMPTON | Jacobean 8x40 Chevron

HAMPTON

FLOOR & WALL | EXTERIOR WALL | GLAZED COLOR-BODY PORCELAIN | WOOD LOOK



White Wash | VTL HPWW



White Wash | VTL HPWW CHEVRONR



Weathered Grey | VTL HPWG



Weathered Grey | VTL HPWG CHEVRONR



Sun Bleached | VTL HPSB



Sun Bleached | VTL HPSB CHEVRONR



Jacobean | VTL HPJA



Jacobean | VTL HPJA CHEVRONR

SIZE	FINISH
8" x 40" x 9mm Rectified	Matte
8" x 40" x 9mm Chevron Rectified	Matte

MOSAICS & TRIM	FINISH
3" x 20" Bullnose Rectified	Matte

TECHNICAL INFORMATION

	Made in USA
	Stock Ready Ship
	V2 Slight Variation
	DCOF > 0.42
	LEED HPD

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥ 400 lbs
Chemical Resistance	Resistant
DCOF	> 0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	6
Water Absorption	≤ 0.5%
Certifications	LEED HPD

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

*Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

COMMON SEGMENTS

Corporate	Healthcare	Hospitality
Restaurant	Senior Living	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"





HOMER

FLOOR & WALL | EXTERIOR WALL | COLOR-BODY PORCELAIN | LIMESTONE LOOK



Piraeus | VTL HOPI



Piraeus | Stave
VTL HOPI MOSSTAVE



Piraeus | 3x8 Brick
VTL HOPI MOSBRICK



Piraeus | 2x2
VTL HOPI MOS22



Athens | VTL HOAT



Athens | Stave
VTL HOAT MOSSTAVE




Athens | 3x8 Brick
VTL HOAT MOSBRICK



Athens | 2x2
VTL HOAT MOS22



Rhodes | VTL HORH



Rhodes | Stave
VTL HORH MOSSTAVE




Rhodes | 3x8 Brick
VTL HORH MOSBRICK



Rhodes | 2x2
VTL HORH MOS22



Eretria | VTL HOER



Eretria | Stave
VTL HOER MOSSTAVE



Eretria | 3x8 Brick
VTL HOER MOSBRICK



Eretria | 2x2
VTL HOER MOS22

SIZE	FINISH
24" x 48" x 9mm Rectified	Matte
24" x 24" x 9mm Rectified	Matte
12" x 24" x 9mm Rectified	Matte
6" x 24" x 9mm Rectified	Matte

MOSAICS & TRIM	FINISH
2" x 24" Stave Mosaic	Matte
3" x 8" Brick Mosaic	Matte
2" x 2" Mosaic	Matte
3" x 24" Bullnose	Matte
6" x 12" Cove Base	Matte

TECHNICAL INFORMATION

	Made in USA
	Ready Ship
	V2 Slight Variation
	DCOF > 0.42

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥ 400 lbs
Chemical Resistance	Resistant
DCOF	> 0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	N/A
Water Absorption	≤ 0.5%
Certifications	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

COMMON SEGMENTS

Corporate	Healthcare	Multi-Family
Residential	Senior Living	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

*Not all sizes/trims are available in all colors and finishes, scan QR code for product details.





IBIZA | Beige 24x48

IBIZA

FLOOR & WALL | EXTERIOR WALL | PORCELAIN | QUARRY TERRACOTTA LOOK



SIZE	FINISH
24" x 48" x 9mm Rectified	Matte
12" x 24" x 9mm	Matte

MOSAICS & TRIM	FINISH
2" x 2" Mosaic	Matte
10" x 12" Diamond Mosaic	Matte
3" x 24" Bullnose	Matte
6" x 12" Cove Base	Matte

TECHNICAL INFORMATION

	Made in USA
	Ready Ship
	V2 Slight Variation
	DCOF ≥ 0.42
	Greenguard VOC Free HPD EPD

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥ 350 lbf
Chemical Resistance	Resistant
DCOF	≥ 0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	N/A
Water Absorption	$\leq 0.5\%$
Certifications	Greenguard VOC Free HPD EPD

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

COMMON SEGMENTS

Corporate	Education	Healthcare
Hospitality	Retail	

RECOMMENDED GROUT JOINT


Rectified	1/8"
Non-Rectified	3/16"

*Not all sizes/trims are available in all colors and finishes, scan QR code for product details.



IRELAND

FLOOR & WALL | GLAZED COLOR BODY & UNGLAZED THROUGH-BODY PORCELAIN | FABRIC LOOK

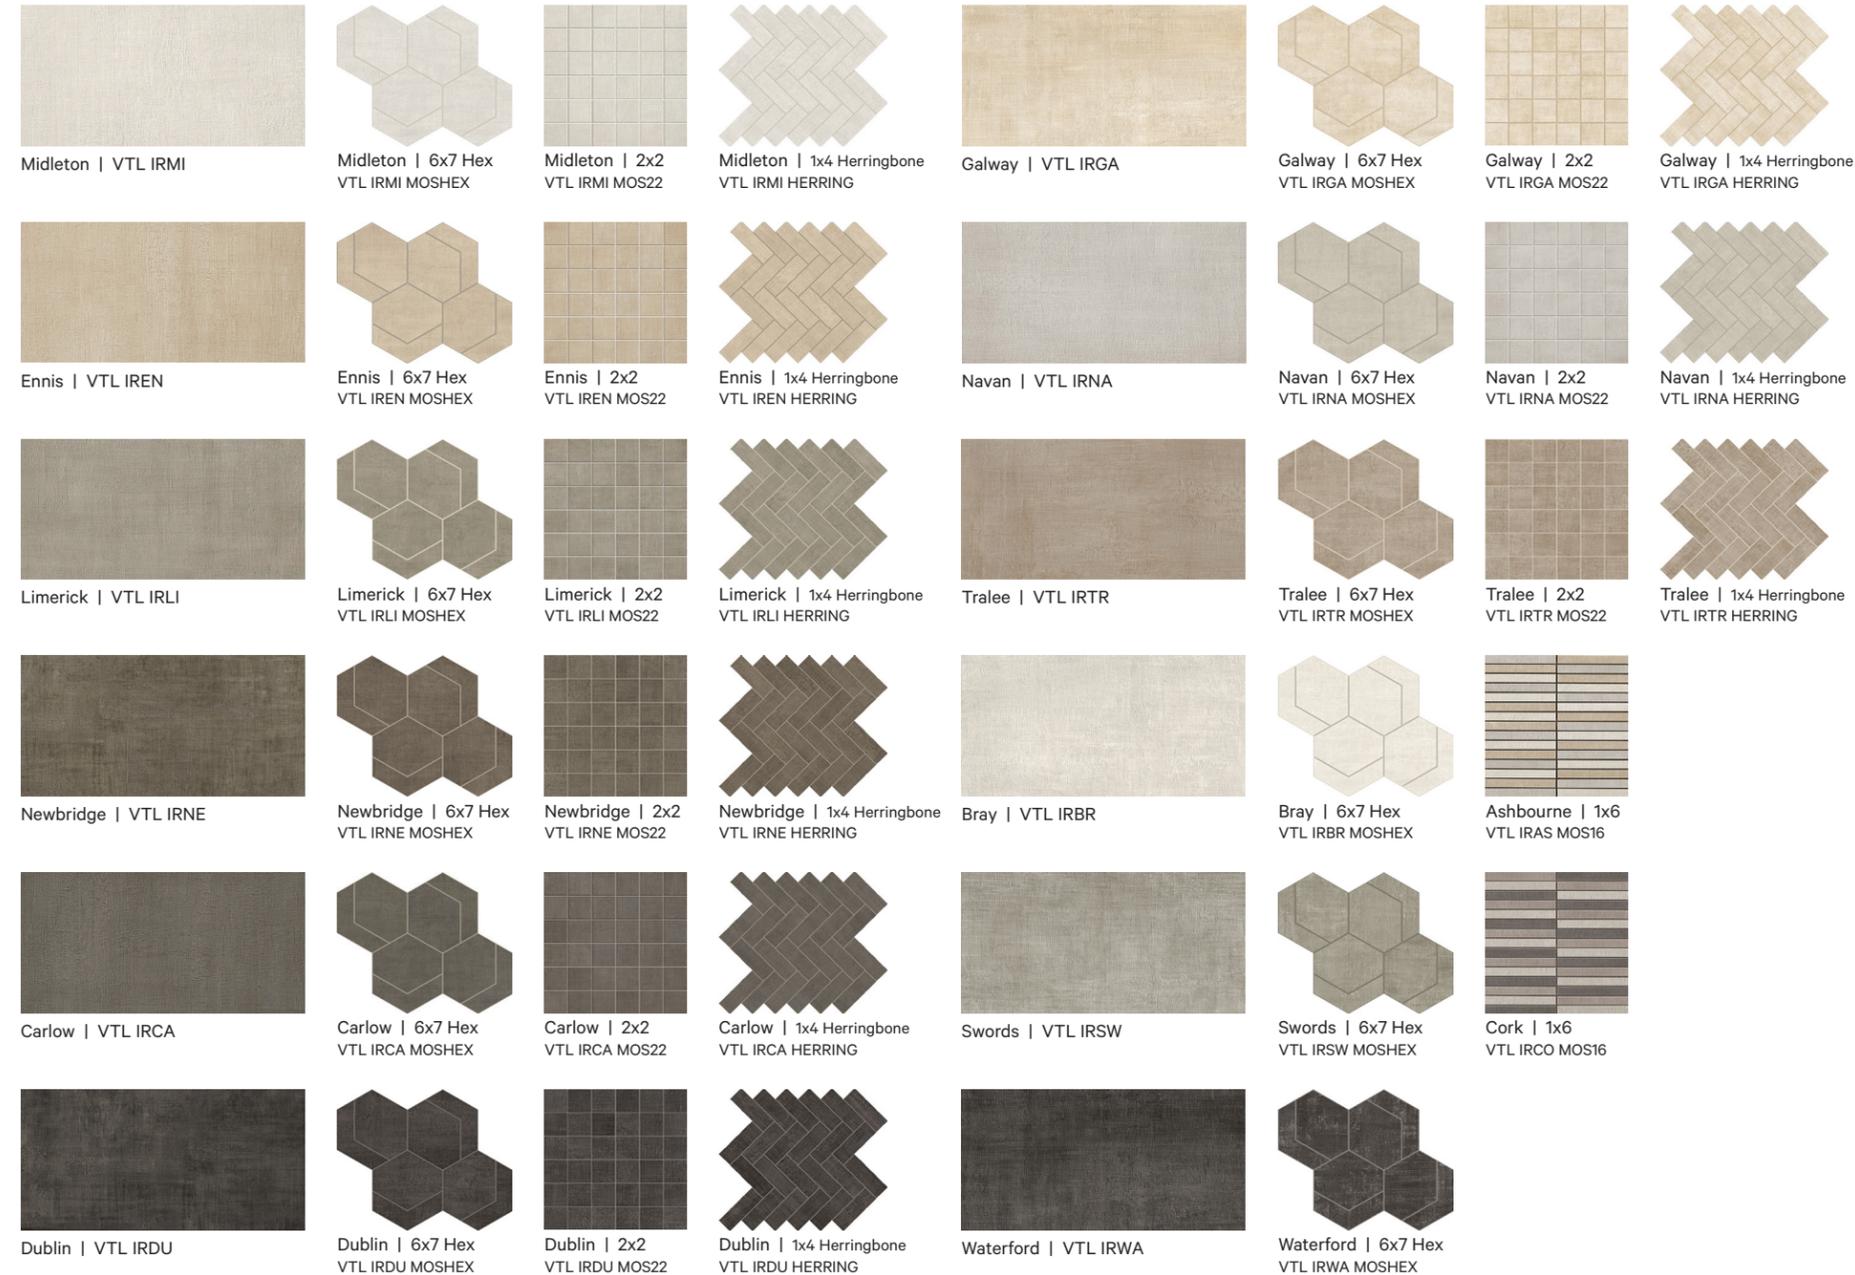

IRELAND | Tralee 24x48 and Midleton 6x7 Hex

SIZE	FINISH
24" x 48" x 9mm Rectified	Matte
12" x 24" x 9mm	Matte

MOSAICS & TRIM	FINISH
6" x 7" Hex Mosaic	Matte
2" x 2" Mosaic	Matte
1" x 6" Mosaic	Matte
1" x 4" Herringbone Mosaic	Matte
3" x 24" Bullnose	Matte
6" x 12" Cove Base	Matte

TECHNICAL INFORMATION

	Made in USA
	Stock Ready Ship
	V2 Slight Variation
	DCOF ≥ 0.42

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥ 350 lbf
Chemical Resistance	Resistant
DCOF	> 0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	N/A
Water Absorption	$\leq 0.5\%$
Certifications	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	•
Exterior		

** Not defined by ANSI Standards

COMMON SEGMENTS

Corporate	Education	Healthcare
Multi-Family	Residential	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.





KAVALA

FLOOR & WALL | EXTERIOR WALL | COLOR-BODY PORCELAIN | TRAVERTINE LOOK



Pegasus | VTL KAPE



Pegasus | 2x2
VTL KAPE MOS22



Satyr | VTL KASA



Satyr | 2x2
VTL KASA MOS22



Minotaur | VTL KAMI



Minotaur | 2x2
VTL KAMI MOS22




Nemean | VTL KANE



Nemean | 2x2
VTL KANE MOS22



Gorgon | VTL KAGO



Gorgon | 2x2
VTL KAGO MOS22

SIZE	FINISH
12" x 24" x 8mm	Matte

MOSAICS & TRIM	FINISH
2" x 2" Mosaic	Matte
3" x 12" Bullnose	Matte
6" x 12" Cove Base	Matte

TECHNICAL INFORMATION

	Made in USA
	Ready Ship
	V2 Slight Variation
	DCOF ≥ 0.42
	Greenguard Bureau Veritas NSF EPD

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥ 300 lbf
Chemical Resistance	Resistant
DCOF	≥ 0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	≥ 7
Water Absorption	$\leq 0.5\%$
Certifications	Greenguard Bureau Veritas NSF EPD

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

*Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

COMMON SEGMENTS

Corporate	Government	Healthcare
Multi-Family	Residential	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"



KAVALA | Satyr 12x24



LEMNOS | Black 24x24

LEMNOS

FLOOR & WALL | COLOR-BODY PORCELAIN | MARBLE LOOK



White | VTL LMWH



White | Wave
VTL LMWH WAVE



White | Trapezoid
VTL LMWH TRAPEZOID



Taupe | VTL LMTA



Taupe | Wave
VTL LMTA WAVE



Taupe | Trapezoid
VTL LMTA TRAPEZOID




Gray | VTL LMGY



Gray | Wave
VTL LMGY WAVE




Gray | Trapezoid
VTL LMGY TRAPEZOID



Black | VTL LMBK



Black | Wave
VTL LMBK WAVE



Black | Trapezoid
VTL LMBK TRAPEZOID

SIZE FINISH

24" x 48" x 7.98mm	Matte
24" x 24" x 7.98mm	Matte
12" x 24" x 7.98mm	Matte

MOSAICS & TRIM FINISH

2" x 4" Trapezoid Mosaic	Matte
12" x 24" Wave Decorative	Matte
3" x 24" Bullnose	Matte
6" x 12" Cove Base	Matte
1" x 12" Jolly	Matte
1" x 6" Cove Base Outcorner	Matte

TECHNICAL INFORMATION

	Made in USA
	Ready Ship
	V4 Substantial Variation
	DCOF ≥ 0.42

PERFORMANCE CHARACTERISTICS

Breaking Strength	> 275lbs
Chemical Resistance	Resistant
DCOF	≥ 0.42
Deep Scratch Resistance	N/A
Frost Resistance	N/A
Mohs Hardness	8
Water Absorption	< 0.5%
Certifications	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior		

** Not defined by ANSI Standards

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

COMMON SEGMENTS

Automotive	Corporate	Government
Hospitality	Religious	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"





LOOMED | Gray 12x24

LOOMED

FLOOR & WALL | GLAZED PORCELAIN | FABRIC LOOK



White | VTL LDWH



Light Gray | VTL LDLG



Beige | VTL LDBE



Gray | VTL LDGR

SIZE	FINISH
12" x 24" x 9.5mm	Matte
MOSAICS & TRIM	FINISH
3" x 24" Bullnose	Matte

TECHNICAL INFORMATION

	Made in USA
	Stock
	V2 Slight Variation
	DCOF \geq 0.42

PERFORMANCE CHARACTERISTICS

Breaking Strength	> 275 lbs
Chemical Resistance	Resistant
DCOF	\geq 0.42
Deep Scratch Resistance	N/A
Frost Resistance	N/A
Mohs Hardness	N/A
Water Absorption	< 0.5%
Certifications	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior		


** Not defined by ANSI Standards

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

COMMON SEGMENTS

Education	Government
Hospitality	
RECOMMENDED GROUT JOINT	
Rectified	1/8"
Non-Rectified	3/16"



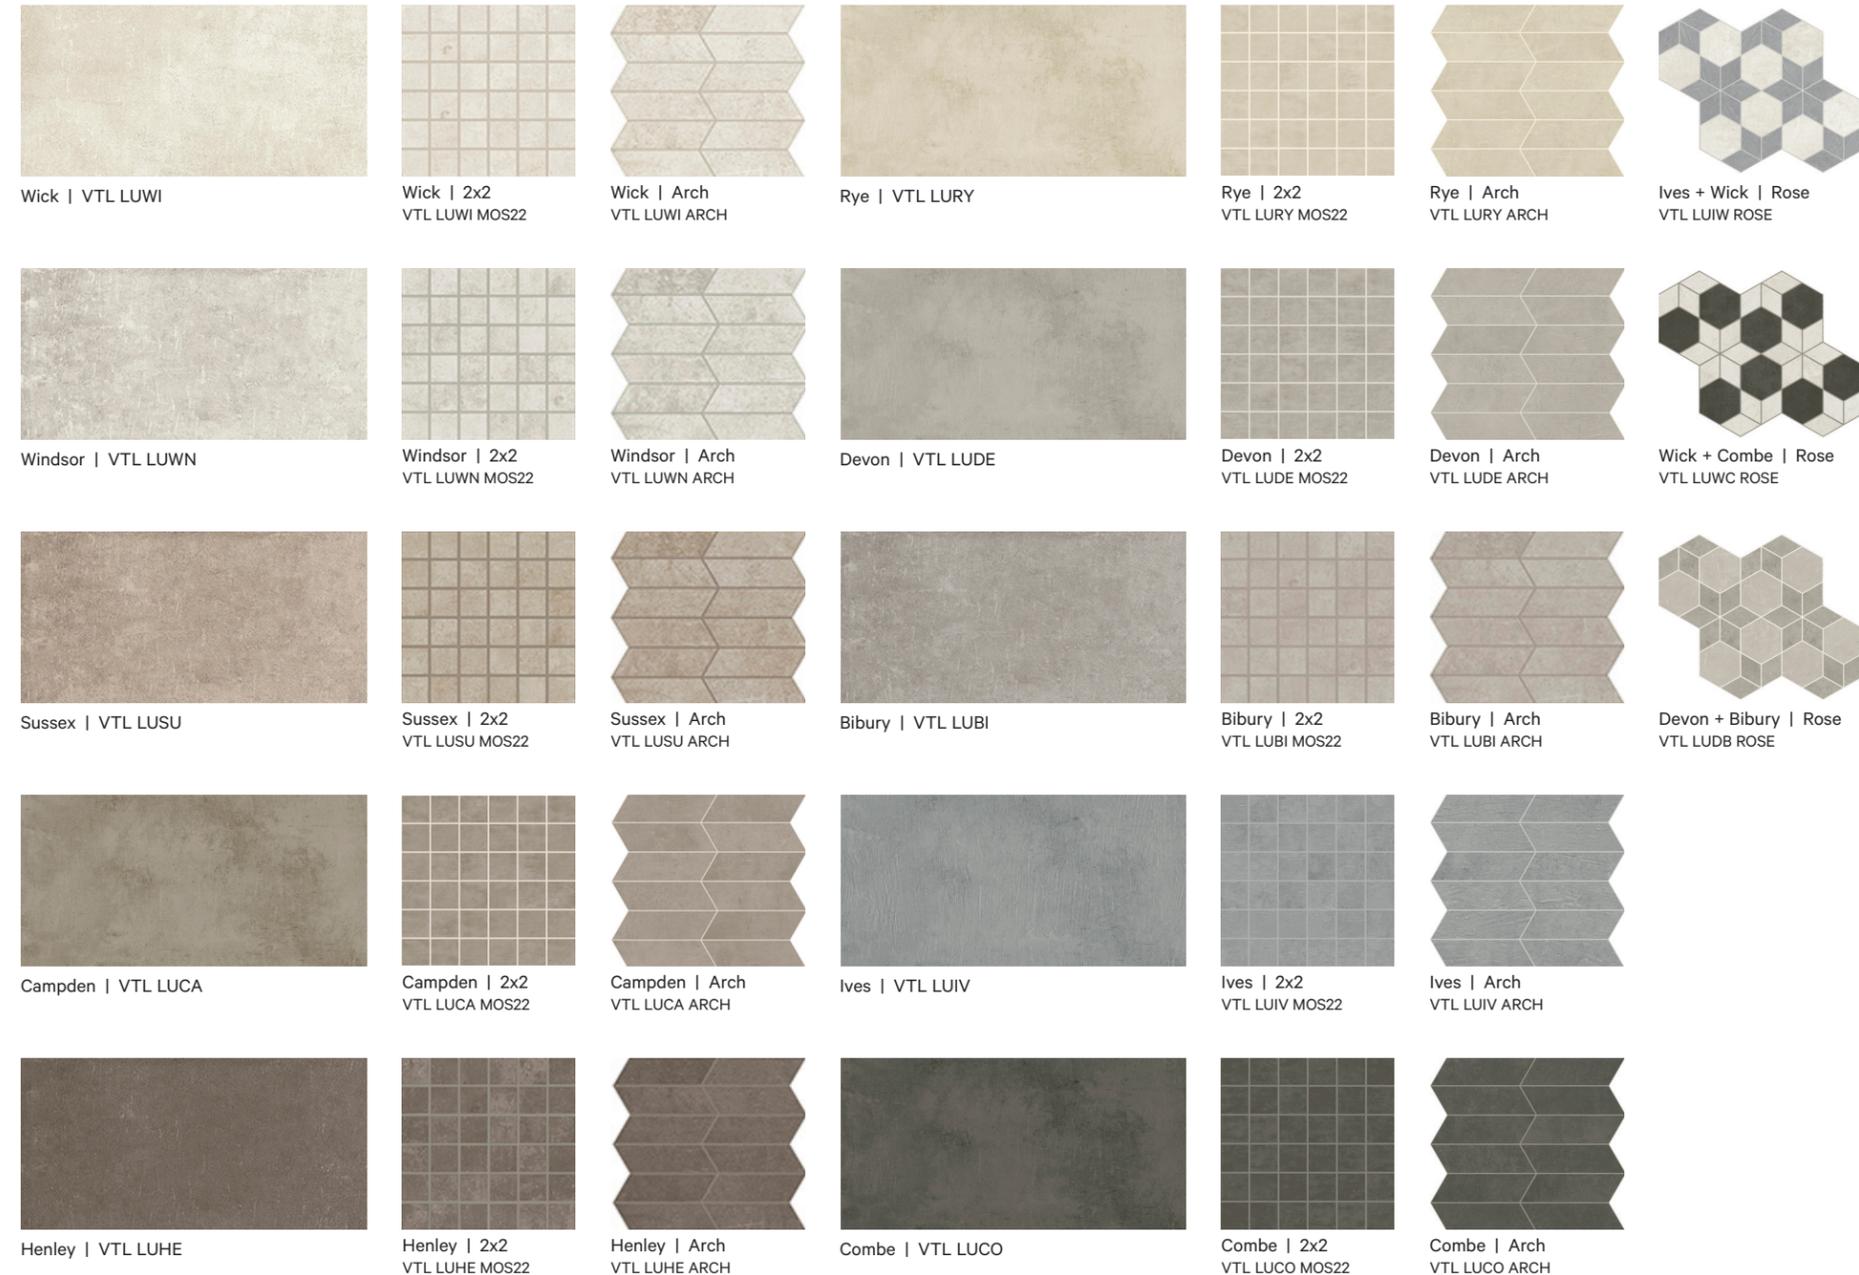

Wick | VTL LUWI

Wick | 2x2
VTL LUWI MOS22

Wick | Arch
VTL LUWI ARCH

Rye | VTL LURY

Rye | 2x2
VTL LURY MOS22

Rye | Arch
VTL LURY ARCH

Ives + Wick | Rose
VTL LUIW ROSE

Windsor | VTL LUWN

Windsor | 2x2
VTL LUWN MOS22

Windsor | Arch
VTL LUWN ARCH

Devon | VTL LUDE

Devon | 2x2
VTL LUDE MOS22

Devon | Arch
VTL LUDE ARCH

Wick + Combe | Rose
VTL LUWC ROSE

Sussex | VTL LUSU

Sussex | 2x2
VTL LUSU MOS22

Sussex | Arch
VTL LUSU ARCH

Bibury | VTL LUBI

Bibury | 2x2
VTL LUBI MOS22

Bibury | Arch
VTL LUBI ARCH

Devon + Bibury | Rose
VTL LUDB ROSE

Campden | VTL LUCA

Campden | 2x2
VTL LUCA MOS22

Campden | Arch
VTL LUCA ARCH

Ives | VTL LUIV

Ives | 2x2
VTL LUIV MOS22

Ives | Arch
VTL LUIV ARCH

Henley | VTL LUHE

Henley | 2x2
VTL LUHE MOS22

Henley | Arch
VTL LUHE ARCH

Combe | VTL LUCO

Combe | 2x2
VTL LUCO MOS22

Combe | Arch
VTL LUCO ARCH



LULWORTH | Wick 12x24 & Campden 24x48

SIZE	FINISH
24" x 48" x 9mm Rectified	Matte
12" x 24" x 9mm	Matte

MOSAICS & TRIM	FINISH
12" x 12" Rose Mosaic	Matte
11" x 11" Arch Mosaic	Matte
2" x 2" Mosaic	Matte
3" x 24" Bullnose	Matte
6" x 12" Cove Base	Matte

TECHNICAL INFORMATION

-  Made in USA
-  Ready Ship
-  V2 Slight Variation
-  DCOF > 0.42

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥ 350 lbf
Chemical Resistance	Resistant
DCOF	≥ 0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	N/A
Water Absorption	≤ 0.5%
Certifications	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

COMMON SEGMENTS

Corporate	Education	Government
Healthcare	Senior Living	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.






MALTA

FLOOR & WALL | GLAZED PORCELAIN | MARBLE LOOK



Oro | VTL MLOR

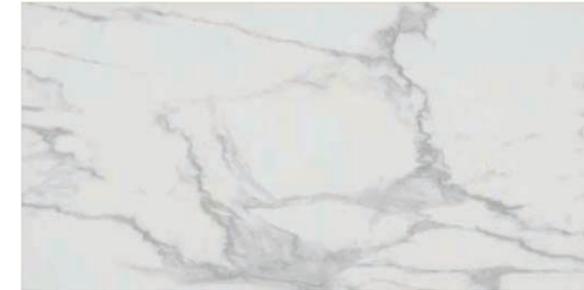

Statuary | VTL MLST

SIZE	FINISH
12" x 24" x 7.94mm	Matte

MOSAICS & TRIM	FINISH
3" x 12" Bullnose	Matte

TECHNICAL INFORMATION



Made in USA



Stock | Ready Ship



V3 Moderate Variation



DCOF \geq 0.42

PERFORMANCE CHARACTERISTICS

Breaking Strength	>275 lbs
Chemical Resistance	N/A
DCOF	\geq 0.42
Deep Scratch Resistance	N/A
Frost Resistance	N/A
Mohs Hardness	N/A
Water Absorption	< 0.5%
Certifications	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior		

** Not defined by ANSI Standards

COMMON SEGMENTS

Multi-Family	Religious
Residential	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.



MALTA | Statuary 12x24



NORRIS

FLOOR & WALL | EXTERIOR WALL | GLAZED COLOR-BODY PORCELAIN | TRAVERTINE LOOK



White | VTL NOWH



White | 3x8 Brick
VTL NOWH BRICK



White | 2x2
VTL NOWH MOS22



Beige | VTL NOBE



Beige | 3x8 Brick
VTL NOBE BRICK



Beige | 2x2
VTL NOBE MOS22



Gray | VTL NOGR



Gray | 3x8 Brick
VTL NOGR BRICK




Gray | 2x2
VTL NOGR MOS22



Black | VTL NOBL



Black | 3x8 Brick
VTL NOBL BRICK



Black | 2x2
VTL NOBL MOS22

NORRIS | White 24x48

SIZE	FINISH
24" x 47" x 9mm Rectified	Matte
24" x 24" x 9mm Rectified	Matte
12" x 24" x 9mm Rectified	Matte

MOSAICS & TRIM	FINISH
3" x 8" Brick Mosaic	Matte
2" x 2" Mosaic	Matte
3" x 24" Bullnose Rectified	Matte
6" x 12" Covebase Rectified	Matte

TECHNICAL INFORMATION

	Made in USA
	Stock Ready Ship
	V2 Slight Variation
	DCOF ≥ 0.42

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥ 400 lbs
Chemical Resistance	Resistant
DCOF	> 0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	N/A
Water Absorption	$\leq 0.5\%$
Certifications	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

COMMON SEGMENTS

Corporate	Education	Healthcare
Hospitality	Multi-Family	


RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"



ORGANIC ROOTS

FLOOR & WALL | EXTERIOR WALL | COLOR-BODY PORCELAIN | CONCRETE LOOK

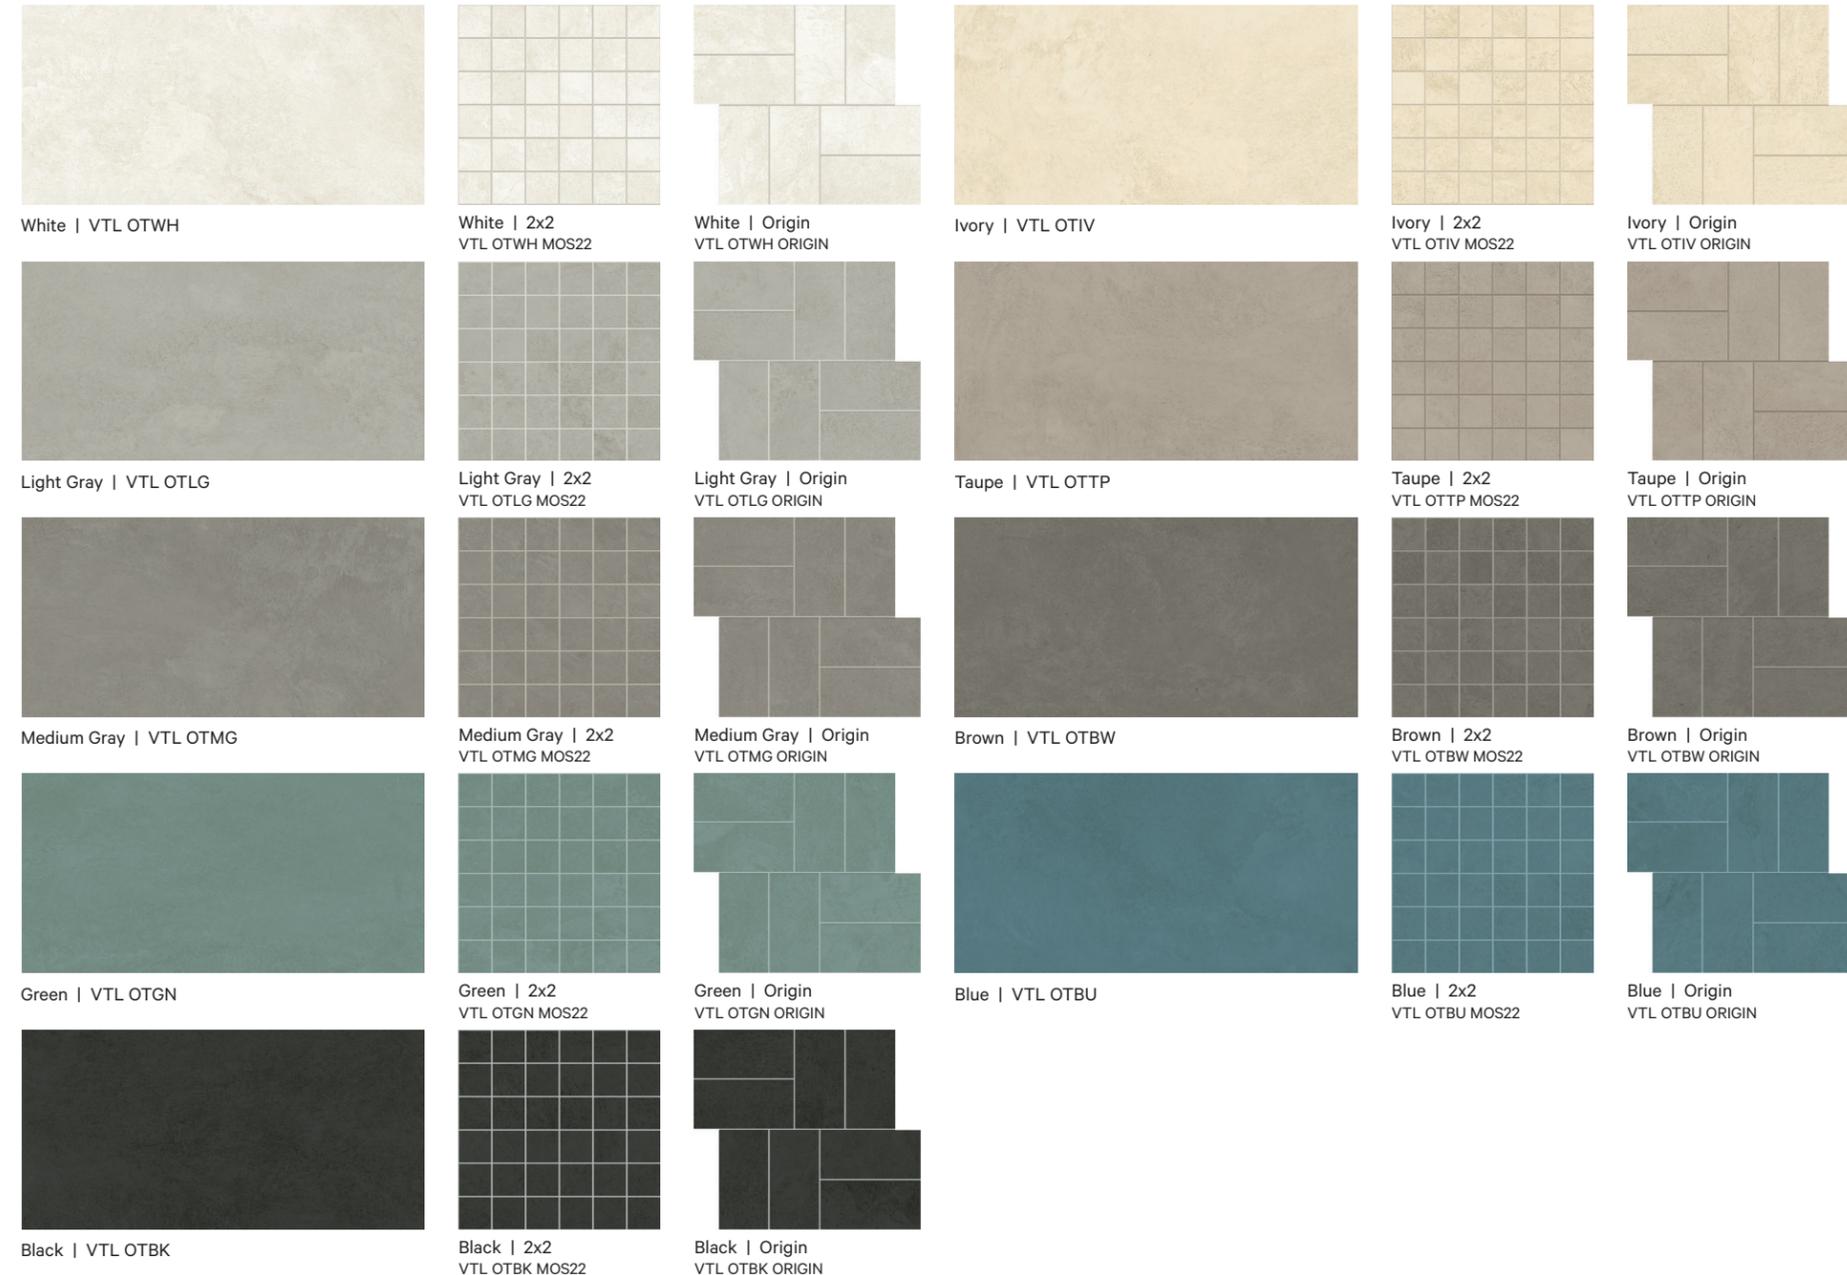

ORGANIC ROOTS | Black & White 24x48 and Blue Origin Mosaic

SIZE	FINISH
24" x 48" x 9mm Rectified	Matte
12" x 24" x 9mm	Matte
3" x 12" x 9mm	Matte

MOSAICS & TRIM	FINISH
12" x 12" Origin Mosaic	Matte
2" x 2" Mosaic	Matte
3" x 24" Bullnose	Matte
6" x 12" Cove Base	Matte

TECHNICAL INFORMATION

-  Made in USA
-  Ready Ship
-  V2 Slight Variation
-  DCOF > 0.42
-  HPD | EPD | Greenguard | VOC Free

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥ 350 lbf
Chemical Resistance	Resistant
DCOF	> 0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	N/A
Water Absorption	≤ 0.5%
Certifications	HPD EPD Greenguard VOC Free

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

COMMON SEGMENTS

Corporate	Education
Government	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.





OUTPOST

FLOOR & WALL | EXTERIOR WALL | PORCELAIN | CONCRETE LOOK




White | VTL OPWH



White | 2x2
VTL OPWH MOS22




Light Gray | VTL OPLG



Light Gray | 2x2
VTL OPLG MOS22




Dark Gray | VTL OPDG



Dark Gray | 2x2
VTL OPDG MOS22



Black | VTL OPBK



Black | 2x2
VTL OPBK MOS22

SIZE	FINISH
24" x 48" x 20mm Rectified	Bush-Hammered
24" x 24" x 20mm Rectified	Matte
24" x 24" x 8mm	Bush-Hammered
12" x 24" x 8mm	Matte

MOSAICS & TRIM	FINISH
2" x 2" Mosaic	Matte
3" x 12" Bullnose	Matte
6" x 12" Cove Base	Matte
12" x 24" 2cm Bullnose Coping Rect.	Bush-Hammered
12" x 24" 2cm Ease Edge Coping Rect.	Bush-Hammered
12" x 24" L-Shaped Coping Rectified	Bush-Hammered
12" x 24" Stair Tread Coping Rectified	Bush-Hammered

TECHNICAL INFORMATION



Made in USA



Ready Ship



DCOF ≥ 0.42



Carbon Neutral

PERFORMANCE CHARACTERISTICS

Breaking Strength ≥ 300 lbf

Chemical Resistance Resistant

DCOF ≥ 0.42

Deep Scratch Resistance N/A

Frost Resistance Resistant

Mohs Hardness N/A

Water Absorption ≤0.4%

Certifications Carbon Neutral

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

COMMON SEGMENTS

Education	Government	Hospitality
Multi-Family	Restaurant	

*Not all sizes/trims are available in all colors and finishes, scan QR code for product details.





PARKETTE

INTERIOR AND EXTERIOR FLOOR & WALL | QUARRY | TERRACOTTA LOOK



Stone | VTL PAST



Gray | VTL PAGR



Silver Flash | VTL PASV




Ash Flash | VTL PAAS



Burnt | VTL PABU



Red | VTL PARD



Sienna Flash | VTL PASI



Autumn | VTL PAAU



Mahogany | VTL PAMA

SIZE	FINISH
8" x 8" x 12.7mm	Matte
8" x 8" x 12.7mm Abrasive	Matte
6" x 6" x 12.7mm	Matte
6" x 6" x 12.7mm Abrasive	Matte
6" x 6" x 12.7mm Tread	Matte

MOSAICS & TRIM	FINISH
8" x 8" Bullnose	Matte
8" x 8" Bullnose Out Corner	Matte
6" x 6" Bullnose	Matte
6" x 6" Bullnose Abrasive	Matte
6" x 6" Bullnose Corner	Matte
6" x 6" Bullnose Out Corner	Matte
6" x 6" Cove Base	Matte
5" x 8" Cove Base	Matte
5" x 6" Cove Base Out Corner	Matte
5" x 6" Round Top Cove Base	Matte
5" x 6" Round Top Cove Base Corner Right	Matte
5" x 6" Round Top Cove Base Corner Left	Matte
1" x 6" Cove Base Incorner	Matte
1" x 6" Cove Base Outcorner	Matte
1" x 5" Cove Base Inside Corner	Matte

PARKETTE | Sienna Flash 6x6

TECHNICAL INFORMATION

	Made in USA
	Stock Ready Ship
	V3 Moderate Variation
	V4 Substantial Variation
	Matte DCOF ≥ 0.42 - ≥ 0.60 Abrasive & Tread DCOF ≥ 0.65

PERFORMANCE CHARACTERISTICS

Breaking Strength	> 350 - 400 lbs
Chemical Resistance	Resistant
DCOF	≥ 0.42 - ≥ 0.65
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	7
Water Absorption	< 3.0%
Certifications	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	•

** Not defined by ANSI Standards

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

COMMON SEGMENTS

Corporate	Education
Hospitality	Restaurant

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"





PENRHYN

FLOOR & WALL | EXTERIOR WALL | GLAZED COLOR-BODY PORCELAIN | SLATE LOOK



Beach | VTL PNBE



Beach | 2x2
VTL PNBE MOS22



Sea Floor | VTL PNSF



Sea Floor | 2x2
VTL PNSF MOS22




Pebble | VTL PNPE



Pebble | 2x2
VTL PNPE MOS22



Volcano | VTL PNVO



Volcano | 2x2
VTL PNVO MOS22

SIZE	FINISH
24" x 24" x 9mm Rectified	Matte
12" x 24" x 9mm Rectified	Matte

MOSAICS & TRIM	FINISH
2" x 2" Mosaic	Matte
3" x 24" Bullnose Rectified	Matte
6" x 12" Cove Base Rectified	Matte

TECHNICAL INFORMATION



Made in USA



Stock | Ready Ship



V4 Substantial Variation



DCOF > 0.42



LEED | HPD

PERFORMANCE CHARACTERISTICS

Breaking Strength ≥ 400 lbs

Chemical Resistance Resistant

DCOF > 0.42

Deep Scratch Resistance N/A

Frost Resistance Resistant

Mohs Hardness N/A

Water Absorption ≤0.5%

Certifications LEED | HPD

TILE APPLICATION

AREA WALL FLOOR

Residential • •

Commercial • •

Heavy Commercial •

Exterior •

** Not defined by ANSI Standards

*Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

COMMON SEGMENTS

Education Healthcare Hospitality

Restaurant Senior Living


RECOMMENDED GROUT JOINT

Rectified 1/8"

Non-Rectified 3/16"



PENRHYN | Pebble 12x24

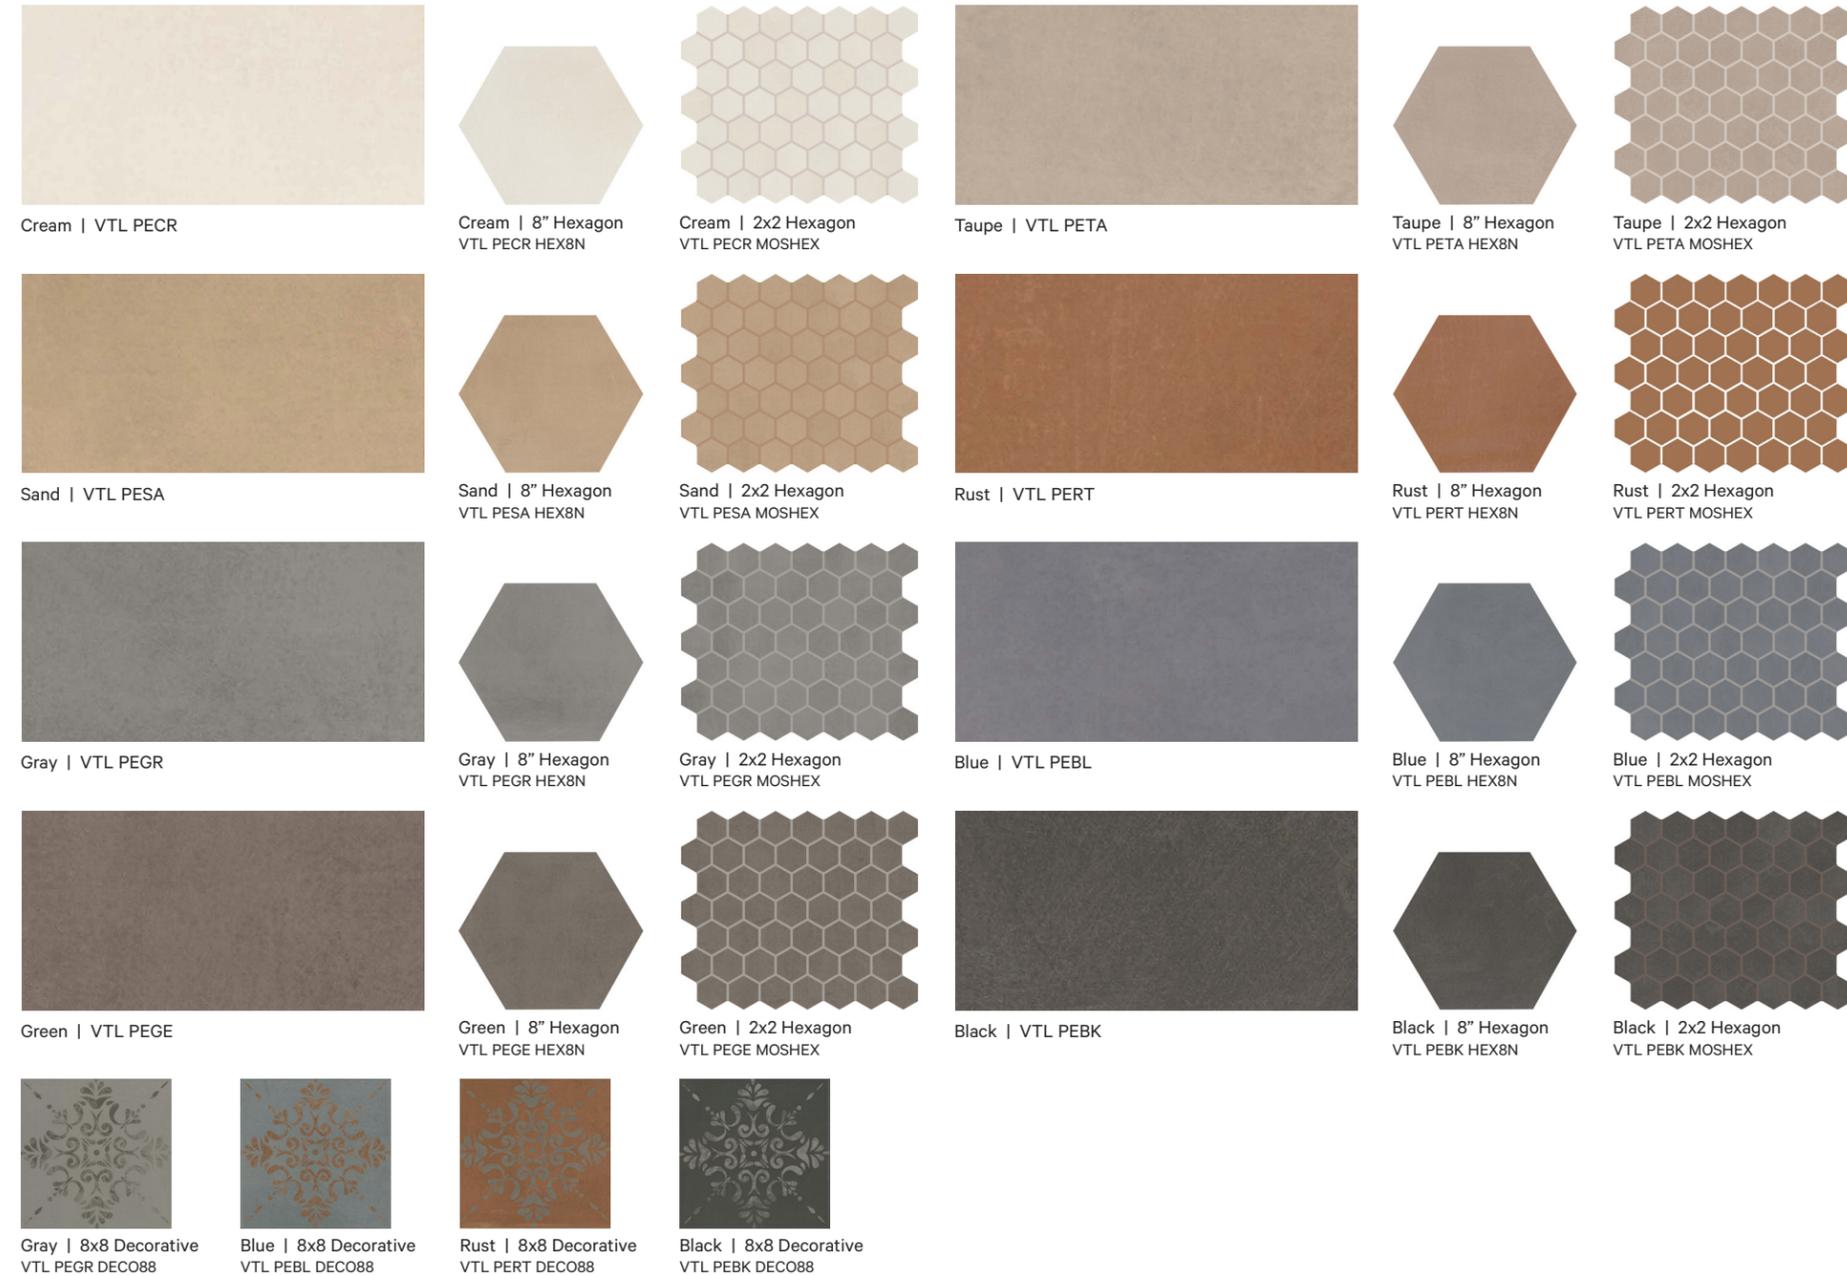

PERSIA | Black 8" Hexagon & Cream 2x2 Hexagon Mosaic

SIZE	FINISH
24" x 24" x 7.94mm Rectified	Matte
12" x 24" x 7.94mm Rectified	Matte
8" x 8" x 7.94mm Hexagon Rectified	Matte

MOSAICS & TRIM	FINISH
8" x 8" Decorative Rectified	Matte
2" x 2" Hexagon Mosaic	Matte
3" x 24" Bullnose	Matte
6" x 12" Cove Base	Matte
1" x 6" Cove Base Out Corner	Matte

TECHNICAL INFORMATION

-  Made in USA
-  Stock
-  V2 Slight Variation
-  DCOF \geq 0.60

PERFORMANCE CHARACTERISTICS

Breaking Strength	> 275 lbs
Chemical Resistance	Resistant
DCOF	\geq 0.60
Deep Scratch Resistance	N/A
Frost Resistance	N/A
Mohs Hardness	8
Water Absorption	\leq 0.5%
Certifications	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	•
Exterior	•	•

** Not defined by ANSI Standards

COMMON SEGMENTS

Corporate	Education	Hospitality
Multi-Family	Residential	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.






PRISM

INTERIOR & EXTERIOR FLOOR & WALL | COLOR-BODY PORCELAIN | CONCRETE LOOK



White | VTL PRWH

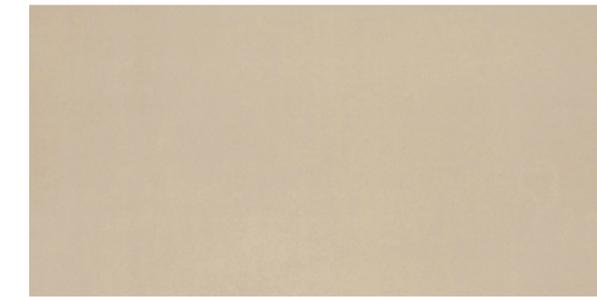

Beige | VTL PRBE



Light Gray | VTL PRLG



Medium Gray | VTL PRMG

SIZE	FINISH
24" x 24" x 7.94mm Rectified	Matte
24" x 24" x 7.94mm Light Polished Rect.	Semi-Polished
12" x 24" x 7.94mm Rectified	Matte
12" x 24" x 7.94mm Light Polished Rect.	Semi-Polished

MOSAICS & TRIM	FINISH
3" x 24" Bullnose Rectified	Matte

NOTE:

This collection also offers additional sizes made in Mexico. Visit our website for more details.

TECHNICAL INFORMATION

	Made in USA
	Ready Ship
	V2 Slight Variation
	DCOF ≥ 0.60

PERFORMANCE CHARACTERISTICS

Breaking Strength	> 275 lbs
Chemical Resistance	Resistant
DCOF	≥ 0.60
Deep Scratch Resistance	N/A
Frost Resistance	N/A
Mohs Hardness	8
Water Absorption	< 0.5
Certifications	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	•

** Not defined by ANSI Standards

*Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

COMMON SEGMENTS

Corporate	Education	Government
-----------	-----------	------------

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"



PRISM | Medium Gray 12x24



PURITY | Elegance 48x48 and Royal 48x110

PURITY

FLOOR & WALL | EXTERIOR WALL | COLOR-BODY PORCELAIN | MARBLE LOOK



Elegance | VTL PTEL



Elegance | 2x2 VTL PTEL MOS22



Elegance | Hex VTL PTEL HEX



Sublime | VTL PTSB



Sublime | 2x2 VTL PTSB MOS22



Sublime | Hex VTL PTSB HEX



Grandeur | VTL PTGR



Grandeur | 2x2 VTL PTGR MOS22



Grandeur | Hex VTL PTGR HEX



Refinement | VTL PTRF



Refinement | 2x2 VTL PTRF MOS22



Refinement | Hex VTL PTRF HEX



Royal | VTL PTRY



Royal | 2x2 VTL PTRY MOS22



Royal | Hex VTL PTRY HEX



Majesty | VTL PTMJ



Majesty | 2x2 VTL PTMJ MOS22



Majesty | Hex VTL PTMJ HEX

SIZE	FINISH
48" x 110" x 6mm Rectified	Matte Polished
48" x 110" x 6mm Bookmatch A Rect.	Polished
48" x 110" x 6mm Bookmatch B Rect.	Polished
48" x 48" x 10mm Rectified	Matte Polished
32" x 96" x 12mm Pre-Fab 12mm Slab	Matte
24" x 48" x 8mm Rectified	Polished
12" x 24" x 10mm Rectified	Matte Polished
3" x 12" x 10mm	Polished

MOSAICS & TRIM	FINISH
2" x 2" Mosaic	Matte Polished
2" x 2" Hexagon Mosaic	Matte Polished
3" x 12" Bullnose	Matte Polished

TECHNICAL INFORMATION



Made in USA



Stock | Ready Ship



DCOF ≥0.42

PERFORMANCE CHARACTERISTICS

Thickness	8mm 10mm 12mm	6mm
Breaking Strength	≥300 lbf	≥250 lbf
Chemical Resistance	Resistant	Resistant
DCOF	≥0.42	≥0.42
Deep Scratch Resistance	N/A	N/A
Frost Resistance	Resistant	Resistant
Mohs Hardness	N/A	N/A
Water Absorption	≤ 0.4%	≤ 0.4%
Certifications	N/A	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

COMMON SEGMENTS

Corporate	Government	Multi-Family
Residential	Retail	

RECOMMENDED GROUT JOINT


Rectified	1/8"
Non-Rectified	3/16"





RENAISSANCE

FLOOR & WALL | EXTERIOR WALL | GLAZED COLOR-BODY PORCELAIN | MARBLE LOOK

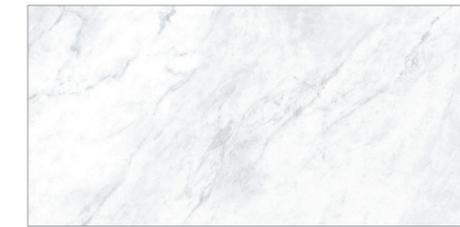

White | VTL REWH



White | 2x2
VTL REWH MOS22



Reign | VTL RERN



Reign | 2x2
VTL RERN MOS22



Gold | VTL REGD



Gold | 2x2
VTL REGD MOS22

SIZE FINISH

12" x 24" x 8mm Matte

MOSAICS & TRIM FINISH

2" x 2" Mosaic Matte

3" x 12" Bullnose Matte

TECHNICAL INFORMATION

	Made in USA
	Ready Ship
	V3 Moderate Variation
	DCOF ≥ 0.42
	Greenguard Bureau Veritas NSF EPD

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥ 300 lb/ft ²
Chemical Resistance	Resistant
DCOF	≥ 0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	N/A
Water Absorption	$\leq 0.4\%$
Certifications	Greenguard Bureau Veritas NSF EPD

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

COMMON SEGMENTS

Education	Government	Hospitality
Multi-Family	Restaurant	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

*Not all sizes/trims are available in all colors and finishes, scan QR code for product details.



RENAISSANCE | Reign 12x24



RESTORATION | Dark-Brown 8x40

RESTORATION

FLOOR & WALL | EXTERIOR WALL | GLAZED COLOR-BODY PORCELAIN | WOOD LOOK



White | VTL REWH



Gray | VTL REGR



Brown | VTL REBR



Dark Brown | VTL REDB

SIZE

8" x 40" x 9mm

FINISH

Matte

TECHNICAL INFORMATION

	Made in USA
	Ready Ship
	V3 Moderate Variation
	DCOF ≥ 0.42
	HPD LEED

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥ 400 lbs
Chemical Resistance	Resistant
DCOF	≥ 0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	N/A
Water Absorption	$\leq 0.5\%$
Certifications	HPD LEED

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

*Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

COMMON SEGMENTS

Corporate	Government	Hospitality
Multi-Family	Restaurant	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"





RIFT | Gray 12x24

RIFT

FLOOR & WALL | GLAZED PORCELAIN & GLAZED CERAMIC | LIMESTONE LOOK



White | VTL RIWH



Beige | VTL RIBE



Gray | VTL RIGR

SIZE FINISH

12" x 24" x 7.94mm | Glazed Porcelain

Matte

MOSAICS & TRIM

FINISH

3" x 12" Bullnose | Glazed Porcelain

Matte

NOTE:

This collection also offers additional sizes made in Mexico. Visit our website for more details.

TECHNICAL INFORMATION



Made in USA



Stock | Ready Ship



V3 Moderate Variation



DCOF \geq 0.42

PERFORMANCE CHARACTERISTICS

Breaking Strength > 275 lbs

Chemical Resistance Resistant

DCOF \geq 0.42

Deep Scratch Resistance N/A

Frost Resistance N/A

Mohs Hardness 8

Water Absorption < 0.5%

Certifications N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior		

** Not defined by ANSI Standards

*Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

COMMON SEGMENTS

Corporate Education Healthcare

Multi-Family Senior Living

RECOMMENDED GROUT JOINT

Rectified 1/8"

Non-Rectified 3/16"





SCENIC | Charcoal 12x24

SCENIC

FLOOR & WALL | EXTERIOR WALL | GLAZED COLOR-BODY PORCELAIN | LIMESTONE LOOK




White | VTL SBWH



White | 2x2
VTL SBWH MOS22



Beige | VTL SBBE



Beige | 2x2
VTL SBBE MOS22




Grey | VTL SBGR



Grey | 2x2
VTL SBGR MOS22



Charcoal | VTL SBCH



Charcoal | 2x2
VTL SBCH MOS22

SIZE	FINISH
24" x 48" x 9mm Rectified	Matte
24" x 24" x 9mm Rectified	Matte
12" x 24" x 9mm Rectified	Matte
6" x 24" x 9mm Rectified	Matte

MOSAICS & TRIM	FINISH
2" x 2" Mosaic	Matte
3" x 24" Bullnose Rectified	Matte
6" x 12" Covebase Rectified	Matte

TECHNICAL INFORMATION



Made in USA



Stock | Ready Ship



V2 Slight Variation



DCOF ≥ 0.42

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥ 400 lbs
Chemical Resistance	Resistant
DCOF	> 0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	N/A
Water Absorption	$\leq 0.5\%$
Certifications	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

COMMON SEGMENTS

Corporate	Education
Government	Healthcare

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"





SERENITY

FLOOR & WALL | EXTERIOR WALL | GLAZED COLOR-BODY PORCELAIN | FABRIC LOOK



White | VTL STWH



White | 2x2
VTL STWH MOS22



Gray | VTL STGR



Gray | 2x2
VTL STGR MOS22



Taupe | VTL STTA



Taupe | 2x2
VTL STTA MOS22



Brown | VTL STBR



Brown | 2x2
VTL STBR MOS22

SIZE	FINISH
12" x 24" x 9mm Rectified	Matte
6" x 24" x 9mm Rectified	Matte

MOSAICS & TRIM	FINISH
2" x 2" Mosaic	Matte
3" x 24" Bullnose	Matte
6" x 12" Cove Base	Matte

TECHNICAL INFORMATION

	Made in USA
	Stock Ready Ship
	V2 Slight Variation
	DCOF ≥ 0.42

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥ 400 lbs
Chemical Resistance	Resistant
DCOF	≥ 0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	6
Water Absorption	$\leq 0.5\%$
Certifications	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

COMMON SEGMENTS

Healthcare	Multi-Family
Residential	Senior Living

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.



SERENITY | Taupe and White 12x24 and Gray 2x2 Mosaic



SONDER

FLOOR & WALL | EXTERIOR WALL | GLAZED PORCELAIN | SOLID LOOK



White | VTL S1WH 312G



Gray | VTL S1GY 312G



Beige | VTL S1BG 312G



Blue | VTL S1BU 312G



Green | VTL S1GN 312G



Navy | VTL S1NV 312G

SIZE	FINISH
3" x 12" x 8mm	Gloss



SONDER | Green 3x12 Gloss

TECHNICAL INFORMATION

-  Made in USA
-  Ready Ship
-  V3 Moderate Variation
-  Carbon Neutral

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥ 300lbf
Chemical Resistance	Resistant
DCOF	N/A
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	N/A
Water Absorption	≤ 0.5%
Certifications	Carbon Neutral

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

COMMON SEGMENTS

Education	Hospitality	Multi-Family
Residential	Restaurant	

RECOMMENDED GROUT JOINT






Rectified	1/8"
Non-Rectified	3/16"



SPOTLIGHT



FLOOR & WALL | EXTERIOR WALL | GLAZED PORCELAIN | CONCRETE LOOK

									
Linen Matte VTL SGLI M	Linen Bush-Hammered VTL SGLI BH	Linen Chiseled VTL SGLI C	Linen 2x2 Matte VTL SGLI MOS22M	Linen 2x2 Bush-Hammered VTL SGLI MOS22BH	Beige Matte VTL SGBE M	Beige Bush-Hammered VTL SGBE BH	Beige Chiseled VTL SGBE C	Beige 2x2 Matte VTL SGBE MOS22M	Beige 2x2 Bush-Hammered VTL SGBE MOS22BH
									
Wheat Matte VTL SGWH M	Wheat Bush-Hammered VTL SGWH BH	Wheat Chiseled VTL SGWH C	Wheat 2x2 Matte VTL SGWH MOS22M	Wheat 2x2 Bush-Hammered VTL SGWH MOS22BH	Moss Matte VTL SGMO M	Moss Bush-Hammered VTL SGMO BH	Moss Chiseled VTL SGMO C	Moss 2x2 Matte VTL SGMO MOS22M	Moss 2x2 Bush-Hammered VTL SGMO MOS22BH
									
Light Grey Matte VTL SGLG M	Light Grey Bush-Hammered VTL SGLG BH	Light Grey Chiseled VTL SGLG C	Light Grey 2x2 Matte VTL SGLG MOS22M	Light Grey 2x2 Bush-Hammered VTL SGLG MOS22BH	Storm Cloud Matte VTL SGSC M	Storm Cloud Bush-Hammered VTL SGSC BH	Storm Cloud Chiseled VTL SGSC C	Storm Cloud 2x2 Matte VTL SGSC MOS22M	Storm Cloud 2x2 Bush-Hammered VTL SGSC MOS22BH
									
Dark Grey Matte VTL SGDG M	Dark Grey Bush-Hammered VTL SGDG BH	Dark Grey Chiseled VTL SGDG C	Dark Grey 2x2 Matte VTL SGDG MOS22M	Dark Grey 2x2 Bush-Hammered VTL SGDG MOS22BH	Atlantic Matte VTL SGAT M	Atlantic Bush-Hammered VTL SGAT BH	Atlantic Chiseled VTL SGAT C	Atlantic 2x2 Matte VTL SGAT MOS22M	Atlantic 2x2 Bush-Hammered VTL SGAT MOS22BH
									
Anthracite Matte VTL SGAN M	Anthracite Bush-Hammered VTL SGAN BH	Anthracite Chiseled VTL SGAN C	Anthracite 2x2 Matte VTL SGAN MOS22M	Anthracite 2x2 Bush-Hammered VTL SGAN MOS22BH					



SPOTLIGHT | Wheat 24x24 and Beige 12x24 Chiseled

SIZE

24" x 48" x 10mm Rectified	Matte
24" x 48" x 10mm Chiseled Rectified	Matte
24" x 48" x 10mm Raw Rectified	Matte
24" x 24" x 10mm Rectified	Matte
24" x 24" x 10mm Bush Hammered Rect.	Matte
12" x 24" x 10mm Rectified	Matte
12" x 24" x 10mm Bush Hammered Rect.	Matte
12" x 24" x 10mm Chiseled Rectified	Matte
12" x 12" x 10mm Rectified	Matte
12" x 12" x 10mm Bush Hammered Rect.	Matte

FINISH

MOSAICS & TRIM

2" x 2" Mosaic	Matte
2" x 2" Mosaic Bush Hammered	Matte
3" x 12" Bullnose	Matte
6" x 12" Cove Base	Matte

FINISH

TECHNICAL INFORMATION

 Made in USA
 Stock Ready Ship
 DCOF ≥ 0.42
 Bureau Veritas Greenguard LEED Green Squared

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥ 400 lb/ft ²
Chemical Resistance	Resistant
DCOF	≥ 0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	N/A
Water Absorption	$\leq 0.4\%$
Certifications	Bureau Veritas Greenguard LEED Green Squared

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

COMMON SEGMENTS

Corporate	Education	Healthcare
Hospitality	Restaurant	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.





SPOTLIGHT | Gloss

FLOOR & WALL | EXTERIOR WALL | GLAZED PORCELAIN | CONCRETE LOOK



SIZE	FINISH
6" x 24" x 8mm Glossy	Gloss
3" x 12" x 8mm Glossy	Gloss

MOSAICS & TRIM	FINISH
6" x 24" Bullnose Glossy	Gloss

TECHNICAL INFORMATION

-  Made in USA
-  Stock | Ready Ship
-  DCOF ≥0.42
-  Bureau Veritas | Greenguard LEED | Green Squared

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥400 lb/ft ²
Chemical Resistance	Resistant
DCOF	≥0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	N/A
Water Absorption	≤0.4%
Certifications	Bureau Veritas Greenguard LEED Green Squared

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

COMMON SEGMENTS

Corporate	Education	Healthcare
Hospitality	Restaurant	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"



SPOTLIGHT | Aqua 3x12



STARLING | Calacatta 24x48 Matte

STARLING

FLOOR & WALL | EXTERIOR WALL | GLAZED COLOR-BODY PORCELAIN | MARBLE LOOK



Dolomite | VTL SRDO



Dolomite | Hexagon
VTL SRDO HEX/P



Dolomite | Herringbone
VTL SRDO HERRING/P



Dolomite | 3x12
VTL SRDO 312R/P



Calacatta | VTL SRCA



Calacatta | Hexagon
VTL SRCA HEX/P



Calacatta | Herringbone
VTL SRCA HERRING/P



Calacatta | 3x12
VTL SRCA 312R/P



Light Grey | VTL SRLG



Light Grey | Hexagon
VTL SRLG HEX/P



Light Grey | Herringbone
VTL SRLG HERRING/P



Light Grey | 3x12
VTL SRLG 312R/P



Silver Grey | VTL SRSG



Silver Grey | Hexagon
VTL SRSG HEX/P



Silver Grey | Herringbone
VTL SRSG HERRING/P



Silver Grey | 3x12
VTL SRSG 312R/P

TECHNICAL INFORMATION

-  Made in USA
-  Stock | Ready Ship
-  V3 Moderate Variation
-  DCOF ≥ 0.42
-  Greenguard | Bureau Veritas NSF EPD

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥ 400 lb/ft ²
Chemical Resistance	Resistant
DCOF	≥ 0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	≥ 7
Water Absorption	$\leq 0.4\%$
Certifications	Greenguard Bureau Veritas NSF EPD

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

*Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

SIZE

- 24" x 48" x 8mm Rectified
- 24" x 24" x 8mm Rectified
- 12" x 24" x 8mm Rectified
- 3" x 12" x 8mm Rectified

FINISH

- Matte | Polished
- Matte | Polished
- Matte | Polished
- Matte | Polished

MOSAICS & TRIM

- 12" x 15" Herringbone Mosaic Rectified
- 11" x 12" Hexagon Mosaic Rectified
- 3" x 24" Bullnose Rectified
- 6" x 12" Cove Base Rectified

FINISH

- Matte | Polished
- Matte | Polished
- Matte | Polished
- Matte

COMMON SEGMENTS

- Corporate
- Education
- Healthcare
- Hospitality
- Multi-Family

RECOMMENDED GROUT JOINT

- Rectified 1/8"
- Non-Rectified 3/16"





THIS OR THAT | Green Hex and Ivory 6x6


THIS OR THAT




WALL | GLAZED CERAMIC | DIMENSIONAL



White | 4x5 Hexagon
VTL TTWH HEX44




White | 6x6
VTL TTWH 66



Ivory | 4x5 Hexagon
VTL TTIV HEX44




Ivory | 6x6
VTL TTIV 66



Green | 4x5 Hexagon
VTL TTGR HEX44




Green | 6x6
VTL TTGR 66



Red | 4x5 Hexagon
VTL TTRD HEX44



Red | 6x6
VTL TTRD 66



Blue | 4x5 Hexagon
VTL TTBL HEX44



Blue | 6x6
VTL TTBL 66

TECHNICAL INFORMATION



Made in USA



Ready Ship



V1 Uniform Appearance

PERFORMANCE CHARACTERISTICS

Breaking Strength	120-230lbs
Chemical Resistance	Resistant
DCOF	N/A
Deep Scratch Resistance	N/A
Frost Resistance	N/A
Mohs Hardness	N/A
Water Absorption	< 20%
Certifications	N/A

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	
Commercial	•	
Heavy Commercial	•	
Exterior		

** Not defined by ANSI Standards

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

SIZE

6" x 6" x 7.75mm
Five unique patterns that are pre-boxed in a random assortment.

4" x 5" x 7.75 Hexagon
Four unique patterns that are pre-boxed in a random assortment.

FINISH

Matte

Matte

MOSAICS & TRIM

1" x 12" Jolly

FINISH

Matte

COMMON SEGMENTS

Corporate	Hospitality	Multi-Family
Residential	Restaurant	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"





TREMAINE | Ivory 24x48

TREMAINE

FLOOR & WALL | EXTERIOR WALL | GLAZED PORCELAIN | MARBLE LOOK



White | VTL TRWH




White | 2x2
VTL TRWH MOS22M/P



White | 9x11 Hexagon
VTL TRWH HEXM/P



Pearl | VTL TRPE



Pearl | 2x2
VTL TRPE MOS22M/P



Pearl | 9x11 Hexagon
VTL TRPE HEXM/P




Ivory | VTL TRIV



Ivory | 2x2
VTL TRIV MOS22M/P



Ivory | 9x11 Hexagon
VTL TRIV HEXM/P

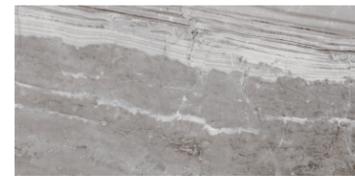

Gray | VTL TRGR




Gray | 2x2
VTL TRGR MOS22M/P




Gray | 9x11 Hexagon
VTL TRGR HEXM/P



Black | VTL TRBL



Black | 2x2
VTL TRBL MOS22M/P



Black | 9x11 Hexagon
VTL TRBL HEXM/P

SIZE	FINISH
24" x 48" x 8mm Rectified	Matte Polished
24" x 24" x 8mm	Matte Polished
12" x 24" x 8mm	Matte Polished
8" x 24" x 8mm Rectified	Polished

MOSAICS & TRIM	FINISH
9" x 11" Hexagon Mosaic	Matte Polished
2" x 2" Mosaic	Matte Polished
3" x 12" Bullnose	Matte Polished

TECHNICAL INFORMATION

	Made in USA
	Ready Ship
	V3 Moderate Variation
	DCOF ≥ 0.42
	Greenguard Bureau Veritas NSF EPD

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥ 400 lb/ft ²
Chemical Resistance	Resistant
DCOF	≥ 0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	N/A
Water Absorption	≤ 0.4%
Certifications	Greenguard Bureau Veritas NSF EPD

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

* Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

COMMON SEGMENTS

Education	Healthcare	Multi-Family
Retail	Senior Living	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"





WATSON

FLOOR & WALL | EXTERIOR WALL | GLAZED COLOR-BODY PORCELAIN | LIMESTONE LOOK



Cream | VTL WTCR



Cream | 2x2
VTL WTCR MOS22



Beige | VTL WTBE



Beige | 2x2
VTL WTBE MOS22




Silver | VTL WTSI



Silver | 2x2
VTL WTSI MOS22




Bronze | VTL WTBZ



Bronze | 2x2
VTL WTBZ MOS22



Steel | VTL WTST



Steel | 2x2
VTL WTST MOS22

SIZE	FINISH
24" x 48" x 8mm Rectified	Matte
24" x 24" x 8mm Rectified	Matte
12" x 24" x 8mm Rectified	Matte
12" x 12" x 8mm Rectified	Matte

MOSAICS & TRIM	FINISH
2" x 2" Mosaic Rectified	Matte
3" x 12" Bullnose Rectified	Matte
6" x 12" Cove Base Rectified	Matte

TECHNICAL INFORMATION



Made in USA



Stock | Ready Ship



V2 Slight Variation



DCOF ≥0.42



Greenguard | Bureau Veritas
NSF EPD

PERFORMANCE CHARACTERISTICS

Breaking Strength	≥400 lb/ft ²
Chemical Resistance	Resistant
DCOF	≥0.42
Deep Scratch Resistance	N/A
Frost Resistance	Resistant
Mohs Hardness	≥ 7
Water Absorption	≤0.4%
Certifications	Greenguard Bureau Veritas NSF EPD

TILE APPLICATION

AREA	WALL	FLOOR
Residential	•	•
Commercial	•	•
Heavy Commercial	•	
Exterior	•	

** Not defined by ANSI Standards

*Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

COMMON SEGMENTS

Corporate	Education	Government
Healthcare	Senior Living	

RECOMMENDED GROUT JOINT

Rectified	1/8"
Non-Rectified	3/16"



WATSON | Cream 24x48 | Steel 24x48 and 2x2 Mosaic



WILLOUGHBY

FLOOR | LUXURY VINYL TILE | WOOD LOOK | FABRIC LOOK



Beige Oak | VTL WGBE



Brown Oak | VTL WGBR



Walnut | VTL WGWL



Hickory | VTL WGHC



Light Gray Oak | VTL WGLG



Medium Gray Oak | VTL WGMG



Weathered Brown | VTL WGWW



Weathered Black | VTL WGWK



Fabric Beige | VTL WGFB



Stone Taupe | VTL WGST



Stone Gray | VTL WGSG



Fabric Gray | VTL WGFG

SIZE FINISH

6" x 48" x 2mm - 12 mil	Matte
6" x 48" x 2.5mm - 20 mil	Matte
18" x 18" x 2mm - 12 mil	Matte
18" x 18" x 2.5mm - 20 mil	Matte

MOSAICS & TRIM FINISH

2" x 94" Liner	Matte
----------------	-------

*Not all sizes/trims are available in all colors and finishes, scan QR code for product details.

PRODUCT FEATURES

Construction: Raw Material	Solid Vinyl Tile
Construction: Edge Detail	Micro-beveled edges and ends
Installation Method	Dry-Back Traditional LVT - Glue Down
Recommended Adhesive	TEC Flexura Flexera HT Bostik LVT-Lock+ Multi-Lock Uni-Lock
Warranty	2.0mm: 7-year Commercial/15-year Residential 2.5mm: 15-year Commercial/30-year Residential

COMMON SEGMENTS

Corporate	Education	Government	Healthcare
Hospitality	Multi-Family	Retail	

COMPLIANCE

Low VOC emissions and FloorScore certified
Free of ortho-phthalates and heavy metals

TECHNICAL INFORMATION

 Made in USA
 Ready Ship
 USGBC Floor Score HPD Certified

TECHNICAL DATA

Thickness	ASTM F386	Nominal ±0.005in
Wear Layer Thickness	ASTM F410	0.020in (0.5mm) minimum for Commercial use
Size	ASTM F2421/F2055	±0.016 in per linear foot
Squareness	ASTM F2421/F2055	0.010 in. maximum
Residual Indentation	ASTM F1914	Average less than 8%
Dimensional Stability	Internal	±0.018in. per linear ft. MD, <0.012 in per lin ft. AMD
Chemical Resistance	ASTM F925	No more than slight change in surface dulling, attack or staining

Resistance to Light	ASTM F1515	ΔE < 8
Resistance to Heat	ASTM F1514	ΔE < 8
Fire Test - Flame Spread	ASTM E648	0.45 W/cm2 or more Class 1
Fire Test - Smoke Evolution	ASTM E48	450 or less
Static Load Resistance @250	ASTM F 970	<0.005in
Fire Test Data - Canada 2.5mm	Flame Spread - 5 Smoke Developed - 75	CAN/ULC S-102.2
ADA Standards for Accessible Design	Chapter 3, Section 302.1	Meets





VITL

COMMERCIAL SURFACES