






SOCORRO 4 & 6 LIGHT FOYER

5124904, 5124906

General Product Information



WARRANTY



FCC STATEMENT

Tools Required



PHILLIPS-HEAD SCREWDRIVER

Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



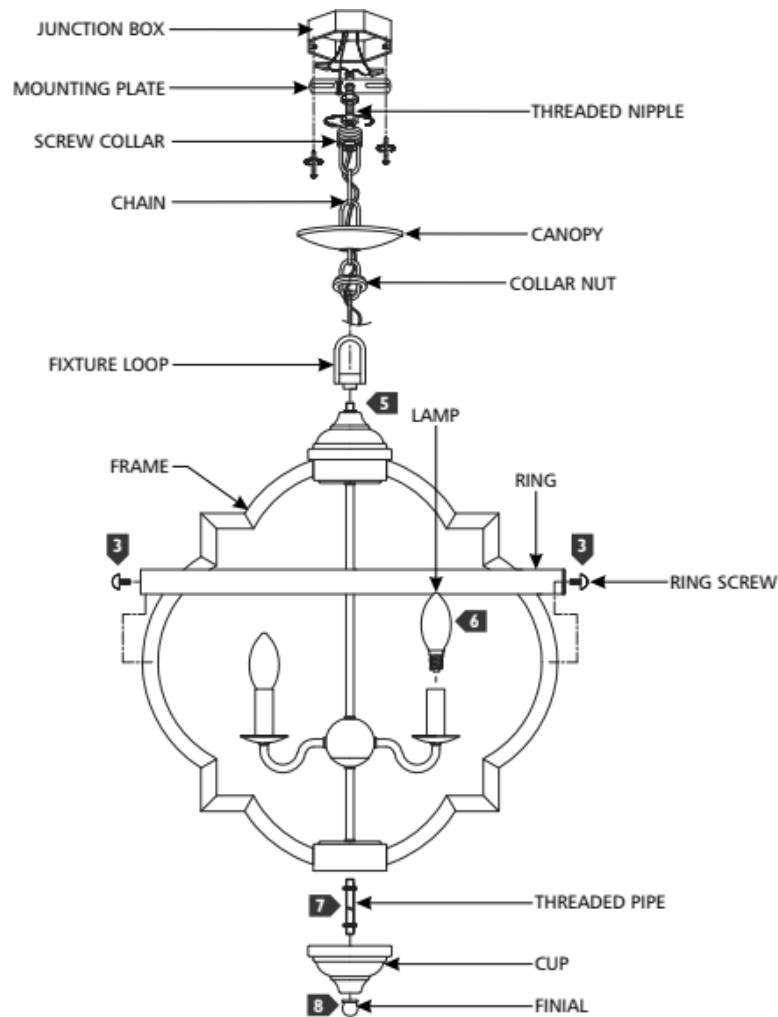

INSTRUCTIONS

I. Preparing the Fixture

1. If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate and the screw collar onto the threaded nipple.
2. Screw the mounting plate to the junction box.
3. Align the holes on the ring with the holes on the frame. Secure the ring using the ring screws.
4. Determine the desired height of the fixture. Open a link with pliers to remove a portion of the chain.
5. Screw the fixture loop onto the top of the fixture. Open the chain link with pliers and install the chain onto the fixture loop. Re-close the chain link.
6. Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.
7. Screw the threaded pipe to the bottom of the fixture.
8. Place the cup onto the threaded pipe and secure it in place using the finial.
9. Unscrew the collar nut from the screw collar. Install the collar nut and the canopy onto the chain.
10. Open a link on the other end of the chain with pliers and install the chain onto the screw collar. Re-close the link.
11. Weave the cord through the chain, collar nut, screw collar, canopy, threaded nipple, and out of the junction box. Trim the cord, leaving enough length to make electrical connections.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around, or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) White fixture wire to neutral power line wire
 - b) Black fixture wire to hot power line wire
4. Neatly place all the wires into the junction box, place the canopy onto the ceiling, and screw the collar nut tightly onto the screw collar to secure it in place and complete installation.