

Smart Garage[™] Control





821LMC-S

Smart Garage Control

This device provides a quick and easy smart home upgrade that allows you to link your existing garage door opener to the myQ[®] app.



Popular features

Smartphone control

Control your garage door from anywhere and receive real-time notifications when your garage door is opening or closing.

Universal

Works with all major brands of garage door openers manufactured after 1993 that have standard safety sensors.

Expandable

Enables up to 16 myQ smart devices including LED lights and light controls.

In-Garage Delivery

Enables Key by Amazon In-Garage Delivery, a secure and convenient package delivery solution for Prime members.*

Scheduling

Conveniently allows you to close and secure your garage door or have your lights turn on/off at designated times.


Guest access

Securely share access with people you know and trust through the myQ Guest feature.

New and improved setup

Enabling smart garage control has never been faster or easier. Physical installation takes minutes and new Bluetooth[®] pairing makes connecting your device to your smartphone and to Wi-Fi[®] a breeze.




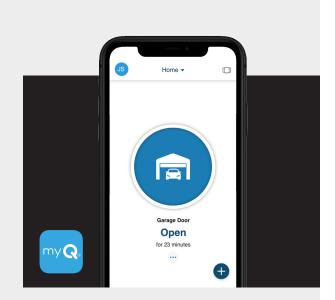

Control from anywhere

+


Peace of mind-delivered. Launch the myQ app to assure your garage door wasn't left open and close it with a tap of a button.

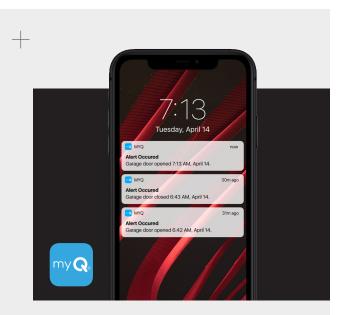

Always in the know

Everyone wants to know what's happening at home while you're away. With real-time notifications, you know every time your garage opens, closes or is left open.

Compatible accessories

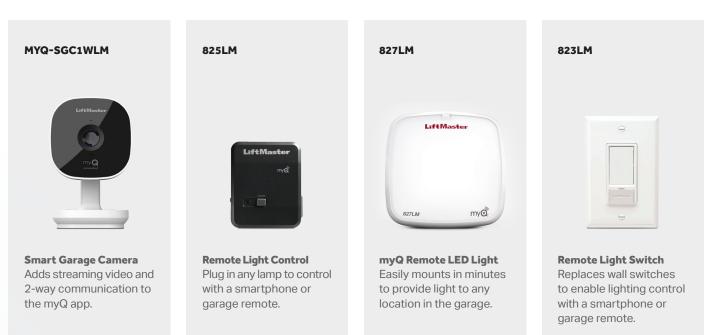



Specifications

Control

Control up to two garage door openers at once with an additional garage door sensor (SKU: 821LMC-SENSOR sold separately), enables up to 16 myQ accessories including LED lights and light controls; acts as a Wi-Fi[®] bridge for Yale | LiftMaster Locks.

Components

Hub communicates with the garage door opener via radio control; plugs into an outlet and mounts on ceiling or walls in the garage; door sensor mounts on the top panel of the inside of a sectional garage door.

Dimensions

Hub:	3.875" W	3.875″ H	1.25″ D
Door Sensor:	2.625" W	2.625″ H	.875″ D

Wi-Fi Network

2.4 GHz

IEEE 802.11 b/g/n

Security: WPA2, WPA and WEP

myQ[®] Radio

902–928 MHz 50-Channel FHSS (frequency hopping spread spectrum); provides 2-way communication from garage door opener and myQ accessories; enables monitoring and control of garage door openers and lighting controls via smartphone/tablet.

Bluetooth™

Enhanced set up experience to home network; communicates with Yale | LiftMaster Locks

Compatibility

Works with all major brands of garage door openers made after 1993 with safety sensors:

- LiftMaster[®], Chamberlain[®], Craftsman[®] and Raynor[®]: 310, 315, 390, 433.30, 433.92, 434.54 MHz
- Linear[®]: MegaCode[®] 318 MHz
- Genie[®]: Intellicode[®] 315, 390 MHz
- Overhead Door[®]: CodeDodger[®] 315, 390 MHz
- Wayne Dalton[®]: KeeLoq[®] 372.5 MHz
- Stanley[®]: SecureCode 310 MHz
- Xtreme Garage[®]: 303 MHz
- Sommer[®]: KeeLoq[®] 310 MHz

1 carton shipping details

Dimensions: 9.88" x 4.13" x 1.77" Contents: 1 hub, 1 door sensor (additional sensors sold separately: 821LMC-SENSOR), power adaptor, mounting plate and hardware, quick start guide Weight: .87 lbs.

Master pack shipping details

Dimensions: 10.75" x 10.00" x 9.13" Quantity: 10 units Weight: 9.69 lbs.

Pallet shipping details

Dimensions: 48.00" x 40.00" x 48.43" Quantity: 800 units Weight: 775.12 lbs.

1 Year Warranty

Note: only install this device with a sectional doornot for use with gates or commercial garage doors.

For purchase and professional install

Visit LiftMaster.com

For partners

Orders: 800.282.6225 | Support: 800.528.2806 | Self service: LiftMasterTraining.com

© 2021 The Chamberlain Group, Inc. All Rights Reserved. | LMACENPGSMCNTRL 2/21

*In-garage delivery is available for Amazon Prime members in select cities and surrounding areas. To learn more about Key by Amazon, and to check your eligibility, visit myq.com/key-by-amazon. Terms and conditions apply.

LiftMaster, the LiftMaster logo, myQ, the myQ logo and Chamberlain are registered trademarks of The Chamberlain Group, Inc. Patented and patents pending. See LiftMaster.com/patents. Amazon, Key and all related logos are trademarks of Amazon.com, Inc. or its affiliates. WI-FI[®] is a trademark of WI-FI Alliance[®]. The Bluetooth[®] word mark and logos are registered trademarks of Anexon. Comparison of ASSA ABLOY Residential Group, Inc. Craftsman is a registered trademark of Stanley Black & Decker, Inc. Raynor is a trademark of Raynor Worldwide. Linearis a trademark of Stanley Black & Decker, Inc. Raynor is a trademark of Raynor Worldwide. Security & Control LLC. Genie and Intellicode are trademarks of GMI Holdings, Inc. Overhead Door, Wayne Dalton and CodeDodger are trademarks of Overhead Door Corporation. KeeLog is a registered trademark of Stanley Logistics LLC. Xtreme Garage is a trademark of Menard, Inc. Sommer is a trademark of Sommer Antriebs-und Funktechnik GmbH. All other trademarks of Menard, Inc. Sommer is a trademark of Sommer Security of their respective owners.