

SIZE	A	B	C	D	PITCH	PLATE
1"	.980 ±.010	1.150 ±.010	.435 ±.010	1.050 ±.010	7	85#
1-3/4"	1.710 ±.010	1.900 ±.010	.510 ±.010	1.800 ±.010	6	85#

**DISCLAIMER**

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.


DISTRIBUTED BY:



REF NO.:

DESCRIPTION:

- This data sheet describes Tri-Foil® WP F-217® products
- A clear PET film bonded to a white LDPE film bonded to aluminum foil bonded to three-ply co-extruded F-217® liner

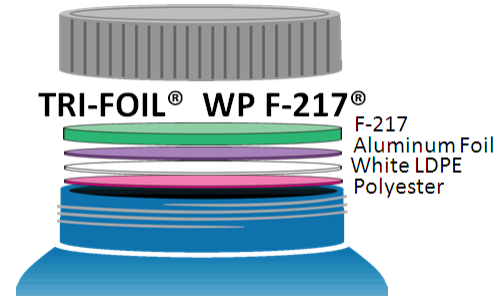


**Typical Product Attributes**

**Construction**

Structure PET / White LDPE / Alum foil / F-217®	12,7µm / 50,8µm / 8,9µm / F-217®	0.0005" / 0.002" / 0.00035" / F-217®
Color	White or as Specified	White or as Specified
Density for 20 ~ 30 mil (0,51 ~ 0,76 mm) of F-217® for 35 ~ 125 mil (0,89 ~ 3,18 mm) of F-217®	0,48 ± 0,03 g / cm <sup>3</sup> 0,40 ± 0,03 g / cm <sup>3</sup>	30 ± 2 lbs / ft <sup>3</sup> 25 ± 2 lbs / ft <sup>3</sup>
Thickness Tolerance for 20 ~ 60 mil (0,51 ~ 1,52 mm) of F-217® for 65 ~ 90 mil (1,65 ~ 2,29 mm) of F-217® for 95 ~ 125 mil (2,41 ~ 3,18 mm) of F-217®	± 0,127 mm ± 0,178 mm ± 0,254 mm	± 5 mil ± 7 mil ± 10 mil
Available Width for 20 ~ 60 mil (0,51 ~ 1,52 mm) of F-217® for 65 ~ 125 mil (1,65 ~ 3,18 mm) of F-217®	25,4 ~ 482,6 mm 25,4 ~ 228,6 mm	1 ~ 19 inch 1 ~ 9 inch
Width tolerance	± 1,6 mm	± 1/16 inch

**Regulatory Compliance**

FDA Compliance	21 CFR 177.1520 (Olefin Polymers) 21 CFR 177.1210 (Closures with Sealing Gaskets for Food Containers) 21 CFR 178.2010 (Antioxidants and/or Stabilizers for Polymers) 21 CFR 175.300 (Resinous and Polymeric Coatings)
Drug Master File (DMF)	2434
Other Compliances	USFDA Food Allergen Guidelines; California Proposition 65 labeling requirements; Limitations of heavy metals in packaging per CONEG & EU 94/62/EC, article 11

<b>DISCLAIMER</b>  THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.	DISTRIBUTED BY: 	REF NO.:
	DESCRIPTION:	