









## EMMONS 3 LIGHT PENDANT

7728002


**General Product Information**

 <p>ETL LISTED Intertek</p>	 <p>SAVE THESE INSTRUCTIONS!</p>	 <p>STANDARD INSTALLATION</p>	 <p>INDOOR</p>
 <p>DAMP LOCATION SAFE</p>	 <p>NEC COMPLIANT JUNCTION BOX</p>	 <p>BULB(S) (NOT INCLUDED)</p>	 <p>TITLE 24 COMPLIANT</p>
 <p>LED</p>	 <p>PLEASE SEE <a href="http://visualcomfort.com">visualcomfort.com</a> FOR PRODUCT SPECS</p>	 <p>CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!</p>	 <p>BEST PRACTICE: HANDLE FIXTURE WITH GLOVES</p>

  
WARRANTY

  
FCC STATEMENT

**Tools Required**


  
PHILLIPS-HEAD SCREWDRIVER

**Safety Information**

**CAUTION-RISK OF FIRE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


**USE MINIMUM 90°C SUPPLY CONDUCTORS.**



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



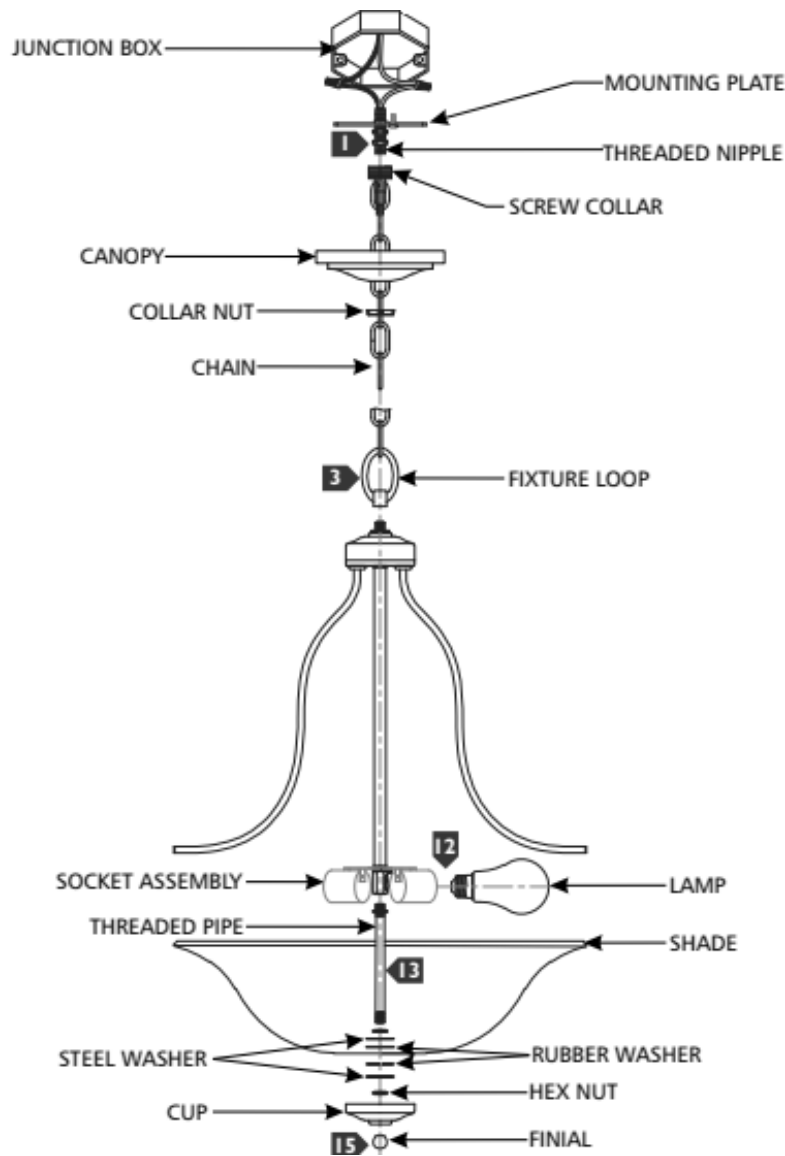

## INSTRUCTIONS

### I. Preparing the Fixture

1. If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate and screw the screw collar onto the threaded nipple.
2. Secure the mounting plate to the junction box.
3. Determine the desired look of the fixture and remove a portion of the chain by opening a link with pliers.
4. Screw the fixture loop onto the fixture. Open the chain link with pliers and install the chain on the fixture loop. Close the chain link.
5. Unscrew the collar nut from the screw collar, then install the collar nut and the canopy onto the chain in that order.
6. Open a link on the other end of the chain with pliers and install the chain onto the screw collar. Close the link.
7. Weave the cord through the chain, canopy, collar nut, screw collar, threaded nipple, and out of the junction box. Trim the cord, leaving enough length to make electrical connections.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.

2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around, or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) White fixture wire to neutral power line wire
  - b) Black fixture wire to hot power line wire
4. Neatly place all wires into the junction box, place the canopy onto the ceiling, and secure it in place by screwing the collar nut tightly onto the screw collar.
5. Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.
6. Install a hex nut onto each end of the threaded pipe, then screw the threaded pipe to the bottom of the socket assembly.
7. Place a steel washer, rubber washer, shade, rubber washer, and steel washer in that order onto the threaded pipe, then secure them in place by screwing a hex nut onto the threaded pipe.
8. Place the cup onto the threaded pipe and secure it by screwing the finial onto the threaded pipe.