


051-25731 / 051-25732

Freedom AFR Acrylic Bathtub
LH or RH Drain

60 x 30 x 18 inches

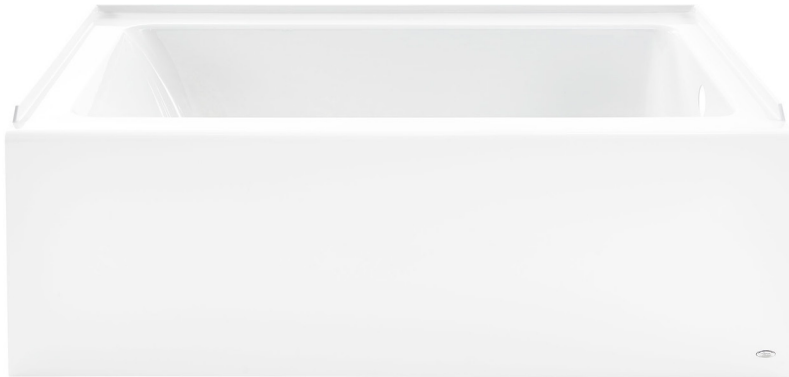

COLOR & TRIM OPTIONS

Stock	Code
White	00

Material to be stacked on pallets

FEATURES

- Height: 18"
- Soaking Depth: 10 $\frac{3}{16}$ "
- High-gloss acrylic with fiberglass reinforcement
- Above floor rough installation
- Integral apron with clean, minimalist design
- Integral three-sided, 1" tiling/water retention flange helps prevent water seepage
- For recess installation
- Pre-leveled tub bottom for easier installation
- Easy to clean, resistant to: bacteria, mold, mildew and stains
- Standard bathtub drain suggested
- 10-Year residential warranty/
1-Year commercial warranty

CODES

- National Plumbing Code of Canada, National Standard Plumbing Code, International Plumbing Code, Uniform Plumbing Code, CSA B45.5, IAPMO Z124, ASTM D2565, UL-969, ADA, HUD, FHA, VA, BAA/BABA

*Compliance effective where applicable and installed accordingly






TECHNICAL SPECIFICATIONS

051-25731 / 051-25732

60 x 30 x 18 inches

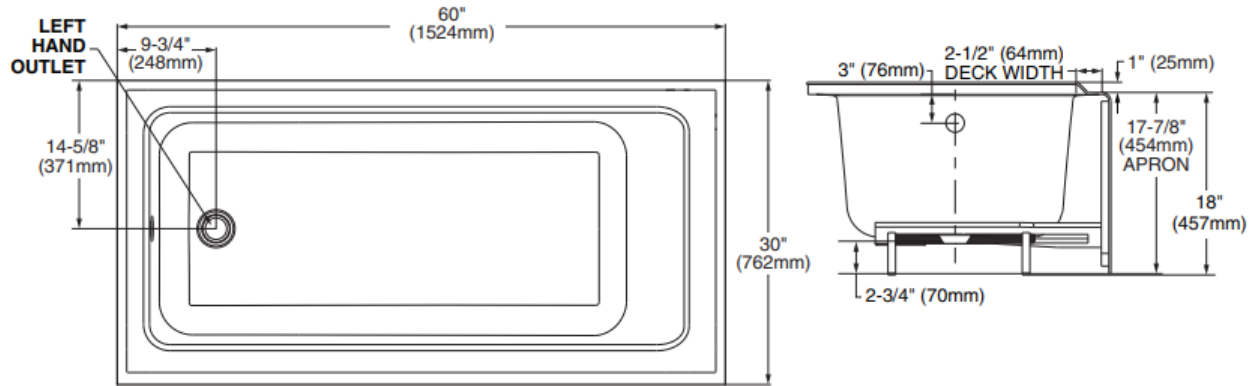

LEFT HAND TUB IS ILLUSTRATED
RIGHT HAND TUB IS REVERSED

FEATURES lbs Dimensional Tolerance $\pm \frac{1}{4}"$. Dimensions needed for site preparation should be measured from the unit. Manufacturer assumes no responsibility for preparatory work.


Model #	Material	Drain	Surface	Pkg. Wt.
Bathtub #051-25732-00	Cast Acrylic	LH	Acrylic w/ Anti-slip	96
Bathtub #051-25731-00	Cast Acrylic	RH	Acrylic w/ Anti-slip	96

DIMENSIONS

Specifications	inches
Width	60
Depth	30
Height	19
Skirt Height	18
Step-over Depth	3 ¹⁵ / ₁₆
Shower Door Mountable Surface Depth:*	2 ¹ / ₂
Drain Rough-In (from Back Wall)	14 ⁵ / ₈
Drain Rough-In (from Side Wall)	9 ³ / ₄
Drain: Diameter / Clearance	2 ¹ / ₈

FRAMING DIMENSIONS inches

Type	D Depth	W Width	H Height	A	B	C
Alcove	30	60	—	Box Out	9 ³ / ₄	14 ⁵ / ₈

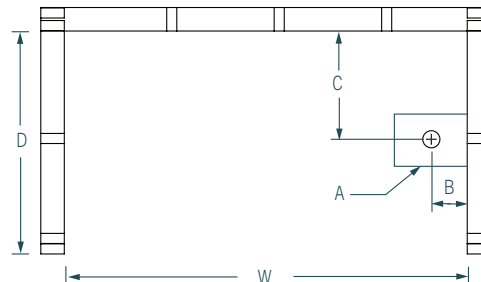

SUMP DATA

Top of Drain to Bottom of Overflow	Capacity to Overflow gal	Lumbar Slope degrees	WIDTH @ centerline		DEPTH @ centerline	
			Top	Bottom	Top	Bottom
9 ¹⁵ / ₁₆	44	28	53	44 ¹ / ₂	25	22

Rev. 08.09.26