



# ASSEMBLY AND INSTALLATION INSTRUCTIONS

W0408

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

**NOTES:** 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. Read and save these instructions.

## Hardware Package (included):

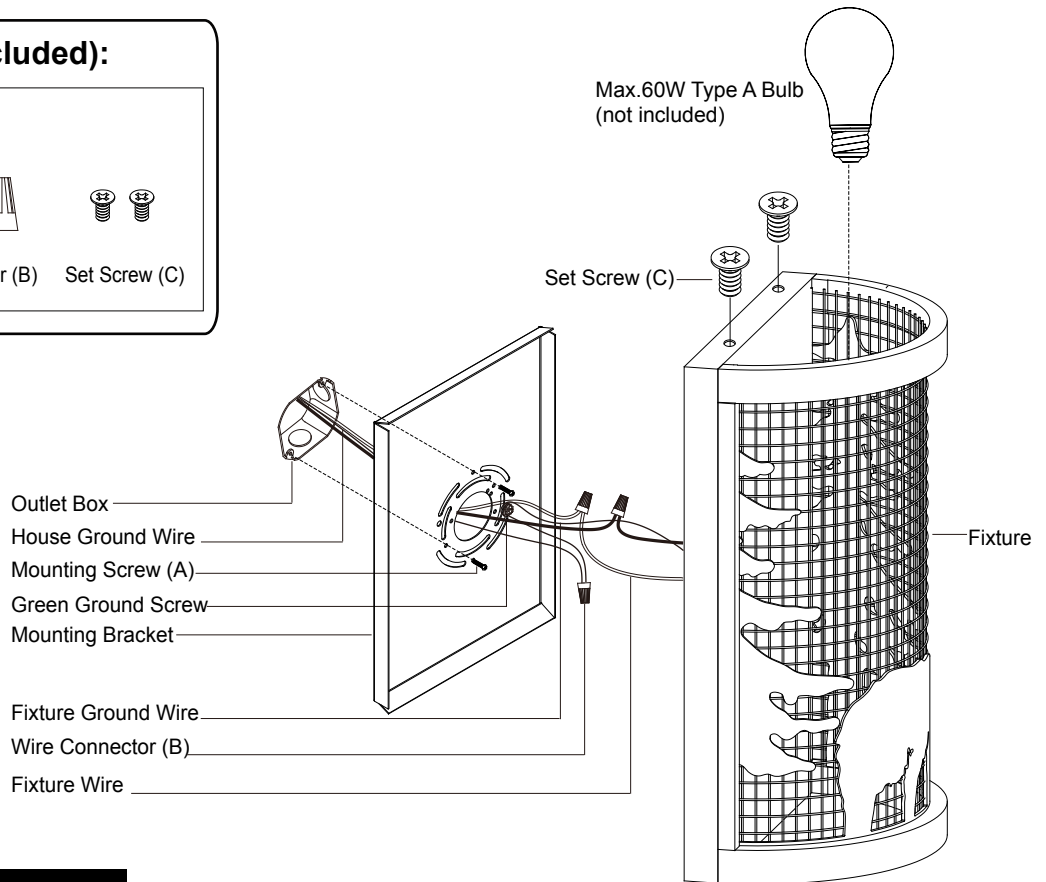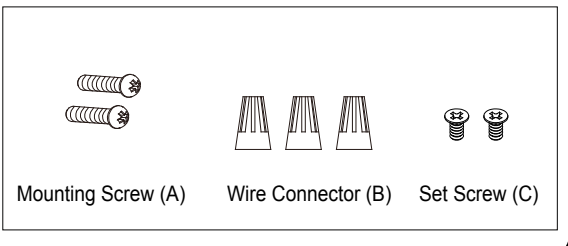

## Installation Steps


Turn off the power at fuse or circuit box.

1. Unscrew the two set screws (C), remove the fixture from the mounting bracket.
2. Attach mounting bracket to the outlet box by using two mounting screws (A).
3. Pull out the source wires from the outlet box. Make wire connections using wire connectors (B) as follows:
  - Connect the hot wire (black insulation) from the power source to the black wire from the fixture.
  - Connect the neutral wire (white insulation) from the power source to the white wire from the fixture.
  - Attach the fixture ground wire (bare wire) to the mounting plate with the green ground screw, or connect to the source ground wire if available.Carefully put the wires back into the outlet box.
4. Attach the fixture to the mounting bracket, then secure it with two set screws .
5. Install 1 x 60W Max. medium base bulb (not included).  
Check relamping label at socket area or packaging for maximum wattage allowed.

Turn on the power at fuse or circuit box.


The following parts are available for re-order if damaged or missing.

**Spare Parts List:**

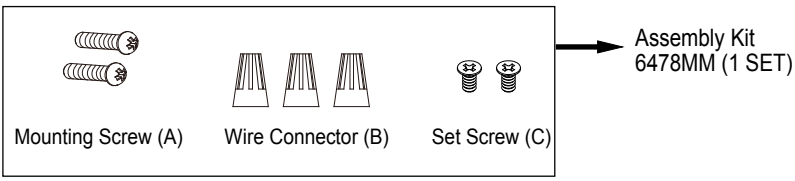

Assembly Kit  
6478MM (1 SET)

Mounting Screw (A)    Wire Connector (B)    Set Screw (C)

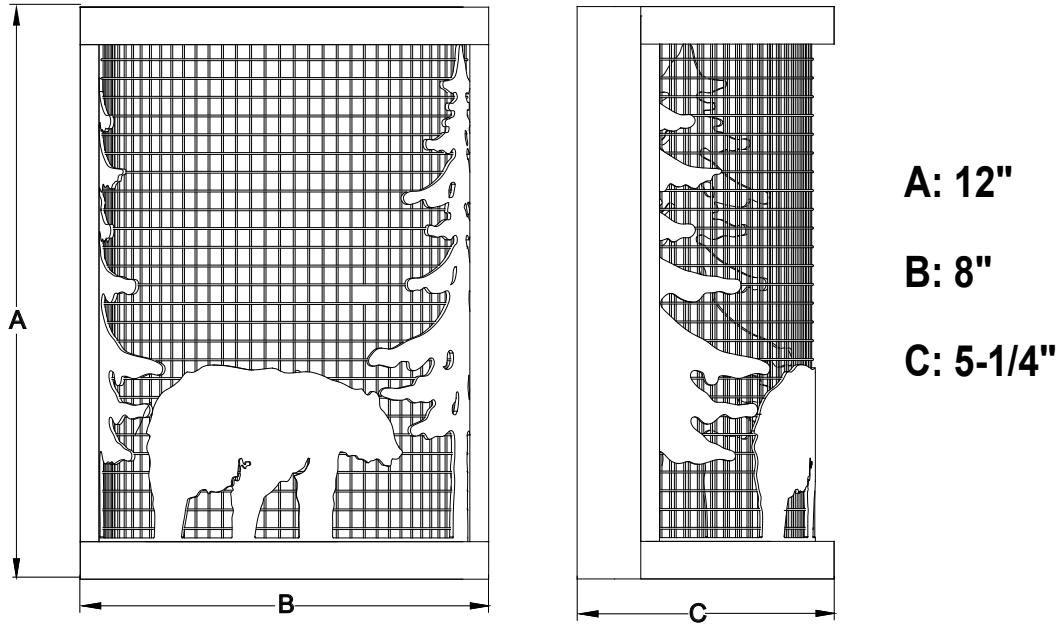

### 1 Year Warranty

Vaxcel warrants all of our products against defects in workmanship and finishes for one year following the date of shipment.

*Exclusions: This warranty does not include the failure of products from extreme acts of nature; environmental conditions not suited for the products intended use; operation in temperatures outside of the range specified in the instruction manual; usage with improper power supply, power surges or dips. For coastal locations, some corrosion is considered normal for the environment.*

*Vaxcel reserves the right to repair, replace or issue a credit for any properly installed product, provided it is returned per RMA instruction. This warranty is limited to the cost of the product only and does not extend to transportation, installation or replacement costs.*

How can warranty service be obtained?

info@vaxcel.com  
1-800-482-9235