Honeywell Home 5800 Wireless Products



5800RPS

Wireless Recessed Transmitter

Honeywell Home 5800RPS Wireless Recessed Transmitter provides concealed protection for entry doors and is so small it virtually disappears once installed. With features including a clean, fast installation, battery life of up to 7 years* and exceptional range, you'll want to use it on every job where aesthetics and discretion are critical.



FEATURES AND BENEFITS

- Smallest wireless recessed transmitter on the market
- Up to 7-year battery life*
- Perfect solution when aesthetics are a concern
- Replaceable lithium coin cell battery (CR1620 type)

*subject to use

SPECIFICATIONS

Product Dimensions

Dowel package: 0.75" diameter **Additional info:** Dowel Lid 0.85" diameter x 0.06" thick

Wire antenna: 8" length x 0.125" diameter (24 gauge) flexible antenna

Fits cavity depth: 0.33" depth


Power Source: Replaceable 3.0V lithium coin cell battery CR1620 (energizer or panasonic)

Transmit Frequency: 345 MHz

Temperature Range: 10°F to 120°F (-12°C to 49°C) Operating Humidity: Up to 95% RH (max), non-condensing Compatibility: Compatible with all 5800 Series wireless receivers and transceivers Agency Listings: FCC

ETL Listed; US and Canada (Tested to UL 634 and ULC C634 standards) IC

5800RPS Installation Tips

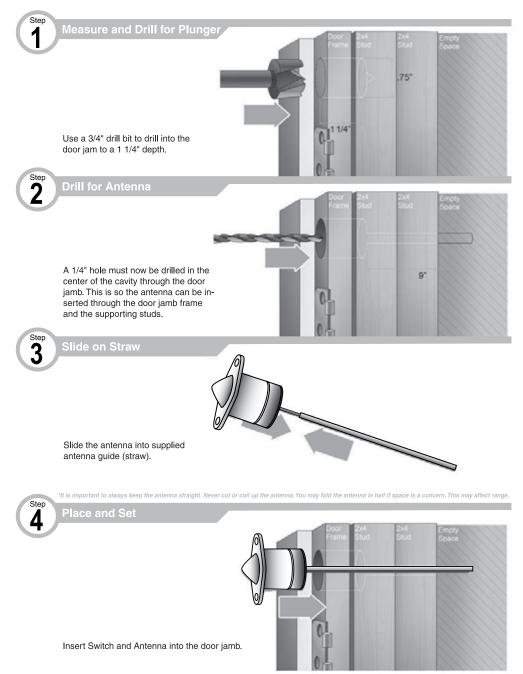

ORDERING

5800RPS

Wireless Recessed Transmitter



Resideo Technologies, Inc.

2 Corporate Center Drive, Suite 100 P.O. Box 9040 Melville, NY 11747 1-800-645-7492 resideo.com

For more information

security.honeywellhome.com/hsc

L/5800RPSD/D | 06/19 © 2019 Resideo Technologies, Inc. This product is manufactured by Resideo and its affiliates. The Honeywell Home trademark is used under license from Honeywell International Inc. All rights reserved.

Honeywell Home