

ENTOURAGE MARBLE WEAVE™

MARBLE & GLASS MOSAIC


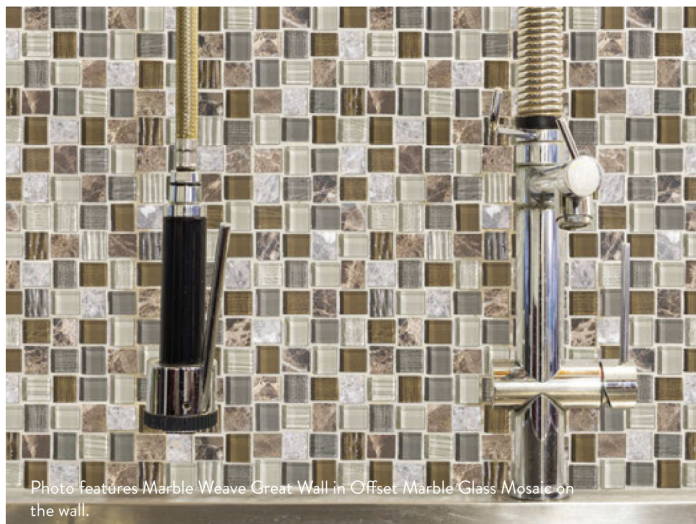


Photo features Marble Weave Great Wall in Offset Marble Glass Mosaic on the wall.

SIZES, SHADE VARIATION & PRICING



OFFSET MARBLE GLASS MOSAIC
(12-1/8" x 12-1/8")
(30.8 cm x 30.8 cm)




TILE THICKNESS: 5/16"
RECOMMENDED GROUT JOINT: 1/8"
RELATIVE PRICING: High

NOTES


Since there is shade variation in all glass products, the tile supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.2 standards.

For additional information, refer to
"Factors to Consider" at <http://americanolean.com/factors-to-consider.cfm>.

OFFSET MARBLE GLASS MOSAIC



GREAT GIZA MW04



COLOSSEUM NIGHTS MW05



STONEHENGE MW06



TAJ MAHAL MW07



GREAT WALL MW08



WHITE WONDER MW09



MACHU PICCHU MW10



CATACOMBS MW11

APPLICATIONS

	SUITABLE
Walls/Backsplashes	☒
Countertops	☐
Pool Linings	☐

Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

PERFORMANCE CHARACTERISTICS

	MOISTURE ABSORPTION	BREAKING STRENGTH	MOH'S	CHEMICAL RESISTANCE	ABRASION RESISTANCE
Mosaic	< 0.5%	> 100 lbs.	4.0	Resistant	n/a

Technical information is for glass tile only

CLEANING PROCEDURES

- Remove loose dust and dirt with a damp cloth or sponge
- Use a neutral, non-abrasive cleaner suitable for ceramic tile
- Remove cleaning solution with a clean, damp sponge or mop

INSTALLATION METHODS BACKING MATERIALS

- Concrete
- Exterior grade plywood
- Cementitious backer board

SETTING

- White latex modified thin-set
- Epoxy

GROUTING

- Unsanded grout
- Epoxy grout



AMERICAN OLEAN®
PROVEN IN TILE™