
JascoPro Series In-Wall Add-on Switch, Paddle





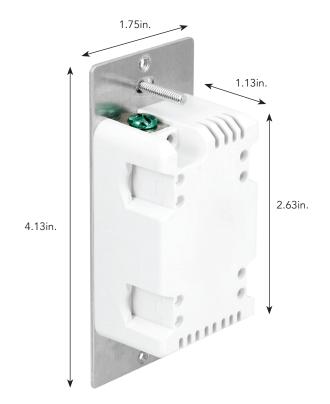

Specifications

Power: 120/277VAC, 60Hz

Operating Temperature: 32-104° F (0-40° C)
Warranty: 5-year limited product warranty
Switch must be mounted indoors


Design Features

- · For use in 3-, 4-, 5- or 6-way configurations with JascoPro Series Wi-Fi, Z-Wave or Zigbee in-wall devices
- · Requires wiring connections neutral, traveler and ground
- QuickFit improved components reduce the housing depth by up to 20% compared to previous models and eliminated the need for heat tabs
- · SimpleWire dual ground ports support daisy-chaining in multiswitch setups
- · Connect up to four add-on switches to primary switch
- · Maximum traveler wire distance: 300ft. interconnected between four add-on switches
- · No more than 75ft, between each switch
- · Maximum traveler wire distance between primary and one add-on switch: 200ft.
- · Requires JascoPro Series smart control not a stand-alone switch
- · Interchangeable rocker switch white and light almond paddles included
- · Uses a standard rocker wallplate not included


Installation Recommendations

- · Insert wire into port and tighten screw do not wrap wire around screw
- · Indoor use only
- · Wallplates sold separately
- · Trilingual instruction manual English, French, Spanish

Multi-Location Wiring

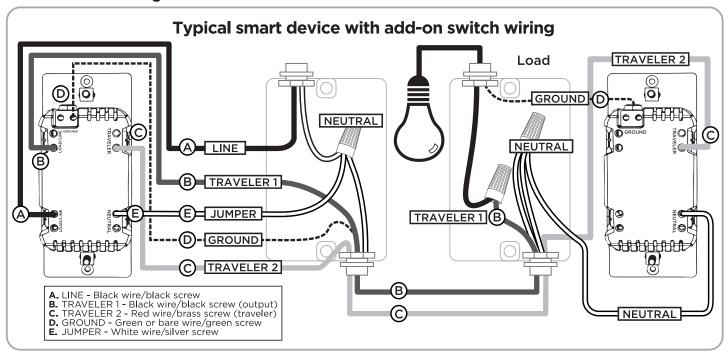

Space-Saving Screw Terminals





Certifications & Compliances



Compliances, specifications and availability are subject to change without notice.

Distributed by Jasco Products Company LLC 10 E. Memorial Rd., Oklahoma City, OK 73114.

Questions? Contact our U.S.-based dedicated support at 1-833-981-0170, M-F, 7AM-8PM Central Time.

©Jasco 2023

Related Products - JascoPro Series Z-Wave In-Wall Smart Controls



76596 In-Wall Smart Switch



59383 In-Wall Smart Dimmer



59387 In-Wall Smart Outlet



79244Plug-in Smart
Switch



Scan to see full line of products or visit jascopro.com

