





FRONT VIEW

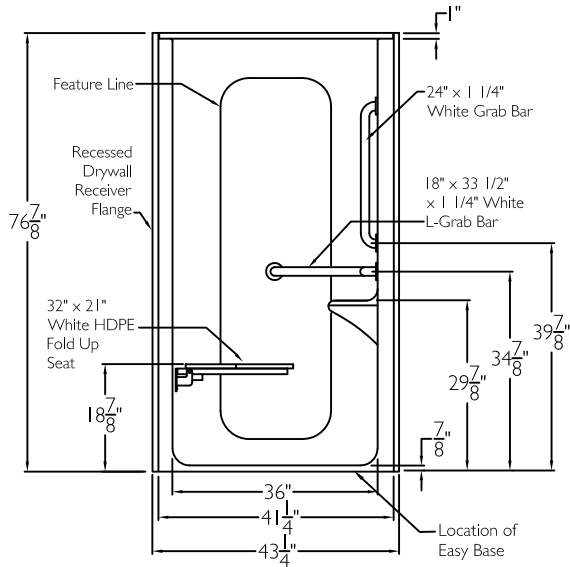


Recessed Receiver Flange (Both Sides)

SIDE VIEW

TOP VIEW

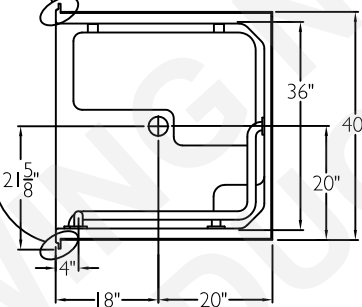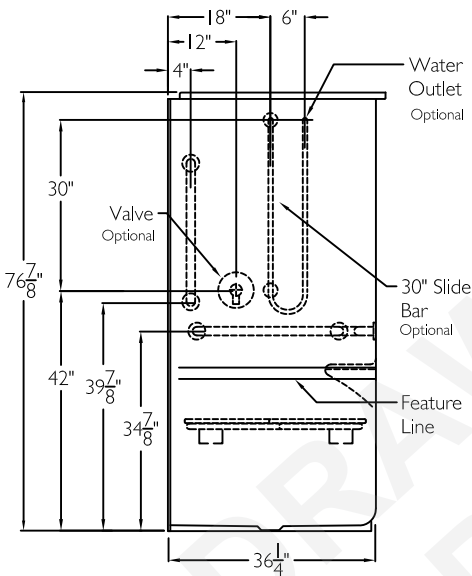

CROSS SECTION OF THRESHOLD

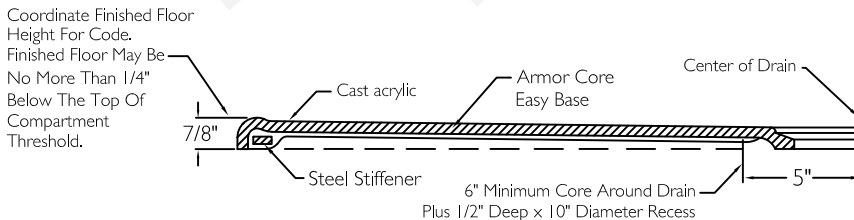

SPECIFICATION SHEET

This shower enclosure shall be model XSA 4136 BF OT .875 right, or left. Finished surface shall be of a sanitary grade cast acrylic exhibiting a minimal thickness of 15 dry mills and a finished cured Barcol hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 43 1/4" at the front, 40" wide, x 38" deep and 76 7/8" high.

The unit shall meet IAPMOZ124, UPC, CSA B45.5, ADA, and ICC/ANSI A117.1.

HANDED BY THE VALVE

The enclosure shall be equipped with the following accessories:

- 1) One 18" x 33 1/2" x 1 1/4" diameter white horizontal L-grab bar
- 2) One 24" x 1 1/4" diameter white vertical grab bar on the valve wall, both with 1 1/2" statute clearance, mounted with stainless steel bolts, and secured from the rear with 3" x 3" x 11 gauge metal mounting plates,
- 3) 32" x 21" frameless white HDPE fold up seat,
- 4) Molded recessed receiver flanges on both side walls,
- 5) Smooth back wall with feature line,
- 6) Open top design,
- 7) Molded soap ledge in corner,
- 8) Armor Core Easy Base self sustaining bottom,
- 9) 7/8" threshold.

THIS UNIT FEATURES THE OUTSIDE DIMENSION OF 40" OF OVERALL WIDTH. THIS DOES NOT ALLOW FOR FULL ENCLOSURE OF THE BOLTS AND NUTS USED TO SECURE THE BARS AND SEAT IN PLACE. THE BOLT AND NUT COMBINATION SHOULD NOT PROTRUDE MORE THAN 3/4" ON EITHER SIDE OF THE SHOWER WALLS. THIS MAY REQUIRE THE NEED TO NOTCH STUDS TO ALLOW BOLT CLEARANCE FOR A DRYWALL ENCLOSED FIRE WALL INSTALLATION. ADJUSTMENT OF THE WALL BOARD MAY BE NECESSARY TO PROVIDE CLEARANCE OF THE BOLT(S) WHILE MAINTAINING THE INTEGRITY OF THE DRYWALL ENCLOSED FIRE WALL ENCLOSURE.

NOTE: THIS UNIT WILL NOT ACCEPT A DOOR.

Job Name	Approved By Print Name	Date	COMFORT DESIGNS	
Project No	Approved By Signature		Model No. XSA 4136 BF OT .875	
Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269 fax 731.925.4290 www.comfortdesignsbathware.com	Architect		Drawing No. XSA 4136 BF OT .875 WLB VWB FHDP RRF Easy Base Smooth	
	Engineer		Date Issued. 6-23-23	Drawing Rev. 8-30-23
	Rep		Material. Cast Acrylic	
	Wholesaler		Color.	
	Comments		Dimensions are in inches. Due to the nature of the materials dimensions may vary $\pm 1/2"$	