

# COLOR STORY™ PINSTRIPES

GLAZED CERAMIC WALL TILE

AMERICAN OLEAN®



MONOCHROMATIC



AMERICAN OLEAN®  
PROVEN IN TILE™

# COLOR STORY™ PINSTRIPES

Take the classic Color Story™ shades to new dimensions with the 2 x 8 Fluted and Wave Crest tiles. These innovative additions offer an array of possibilities, breathing fresh life into your space. The synergy of the linear and structural designs allows for an entirely new and playful display, where the stripes and waves harmoniously coexist. This artistic inspiration in a beloved color palette, creates a visual narrative that's exclusive to your style, telling a story that's uniquely yours.



Cover photo features Color Story™ Pinstripes Wisdom 2 x 8 Fluted on the wall and Urban Essence™ Pumice 15 x 30 on the floor.  
Above photo features Color Story™ Pinstripes Ice White 2 x 8 wavecrest on the wall.

# COLOR STORY™ PINSTRIPES

GLAZED CERAMIC WALL TILE

AMERICAN OLEAN®

FINISHES: GLOSSY

## USAGE



FLOOR



WALL



COUNTERTOP



SHOWER FLOOR



EXTERIOR FLOOR

## MATERIAL



GLAZED CERAMIC

## PRICING



LOW HIGH

## SPECIAL FEATURES



STEPWISE™



TRUEEDGE™



MADE IN THE U.S.A.



LARGE FORMAT



MOSAIC/DECO



ENCAUSTIC



TERRAZZO



PAVER



CUSTOMIZE

NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

MONOCHROMATIC

## GLAZED CERAMIC 2 x 8 WALL TILE - FLUTED



ICE WHITE 0025



BALANCE 0014




STABLE 0055



TRANQUILITY 0059




WISDOM 0082



NAVY 0117

## GLAZED CERAMIC 2 x 8 WALL TILE - WAVE CREST

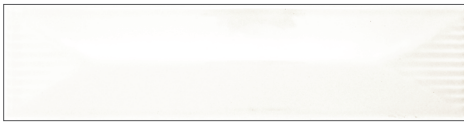

ICE WHITE 0025




BALANCE 0014



STABLE 0055



TRANQUILITY 0059

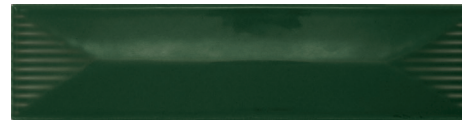

WISDOM 0082



NAVY 0117



STAINPROOF



FIRE-RESISTANT



SIMPLICLEAN™

VISIT [AMERICANOLEAN.COM/WHYTILE](http://AMERICANOLEAN.COM/WHYTILE) FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

# COLOR STORY™ PINSTRIPES

GLAZED CERAMIC WALL TILE

AMERICAN OLEAN®

FINISHES: GLOSSY

## USAGE



## MATERIAL



## PRICING



## SPECIAL FEATURES



NOT APPLICABLE FOR ALL PRODUCTS IN THIS SERIES. SEE CHARTS FOR FULL PRODUCT DETAILS.

MONOCHROMATIC

## SIZES

			THICKNESS	SQ. FT./ CARTON	PIECES/ CARTON
	2 x 8 Fluted Wall Tile	2-1/8" x 8-9/16" (5.45 cm x 21.82 cm)	5/16"	10.40	80
	2 x 8 Wave Crest Wall Tile	2-1/8" x 8-9/16" (5.45 cm x 21.82 cm)	5/16"	10.40	80

## APPLICATIONS

	TARGET DCOF WET	SUITABLE
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors - Standard Center Drain (Residential or Light Commercial)	≥ 0.42	
Shower Floors - Linear Drain	≥ 0.60	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	●
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit [americanolean.com/DCOF](http://americanolean.com/DCOF).

### APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

## FEATURES

PRE-CONSUMER  
RECYCLED MATERIALS



All or select items within this series meet the requirements for these qualifications. For more information visit [americanolean.com](http://americanolean.com).

## TRIM

			NUMBER	PIECES/ CARTON
	Jolly	1/2 x 12	S1/212J	6 Cards*

\* 4 pieces per card

## INSTALLATION

Grout Joint Recommendation	Shade Variation
1/16" (When rectangular size is installed in a staggered brick-joint pattern, overlap should not exceed 33%.)	 LOW (V1)

## PERFORMANCE CHARACTERISTICS

	ASTM#	RESULT
Water Absorption	C373	< 20.0%
Breaking Strength	C648	120 - 230 lbs
Scratch Hardness	MOHS	4.0 - 6.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: [americanolean.com/information/TestResults](http://americanolean.com/information/TestResults).

## NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: [americanolean.com/Factors](http://americanolean.com/Factors).

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Manufacturer Advisory: All tile is measured by the DCOF AcuTest™ method. Tiles with DCOF values < 0.42 are not recommended for use in areas with wet or slippery conditions. For more information, see ANSI standard A137.1 section 6.2.2.1.10, available at [www.tileusa.com](http://www.tileusa.com).

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

888.AOT.TILE



AMERICAN OLEAN®  
PROVEN IN TILE™

AMERICANOLEAN.COM

©2024 AMERICAN OLEAN (4/24)