

ASSEMBLY INSTRUCTION

CURVED BACK TUFTED DINING CHAIR

A Chair Body **B** Front Leg **C** Back Leg **D** Lock Washer M8x12mm



1pc

2pcs

2pcs

8pcs

E Flat Washer
M8x22mm

F Bolt
M8x70mm

G Bolt
M8x50mm

H Allen Key
M5




8pcs

4pcs


4pcs

1pc

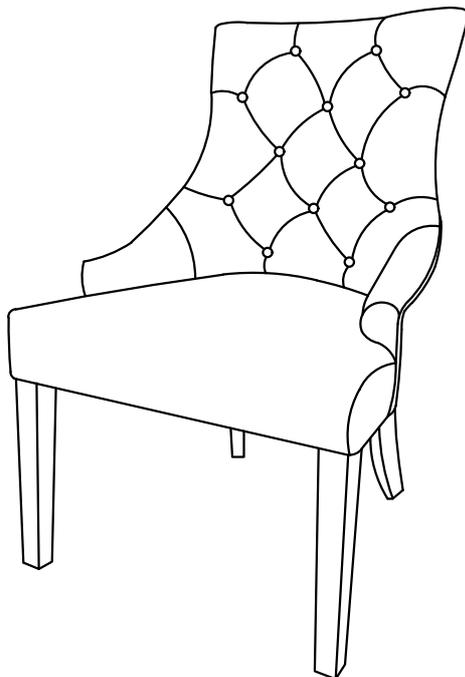

This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.


1 Attach the Front Leg (B) to Chair Body (A) with Lock Washer (D), Flat Washer (E) and Bolt (F) by Allen Key (H).

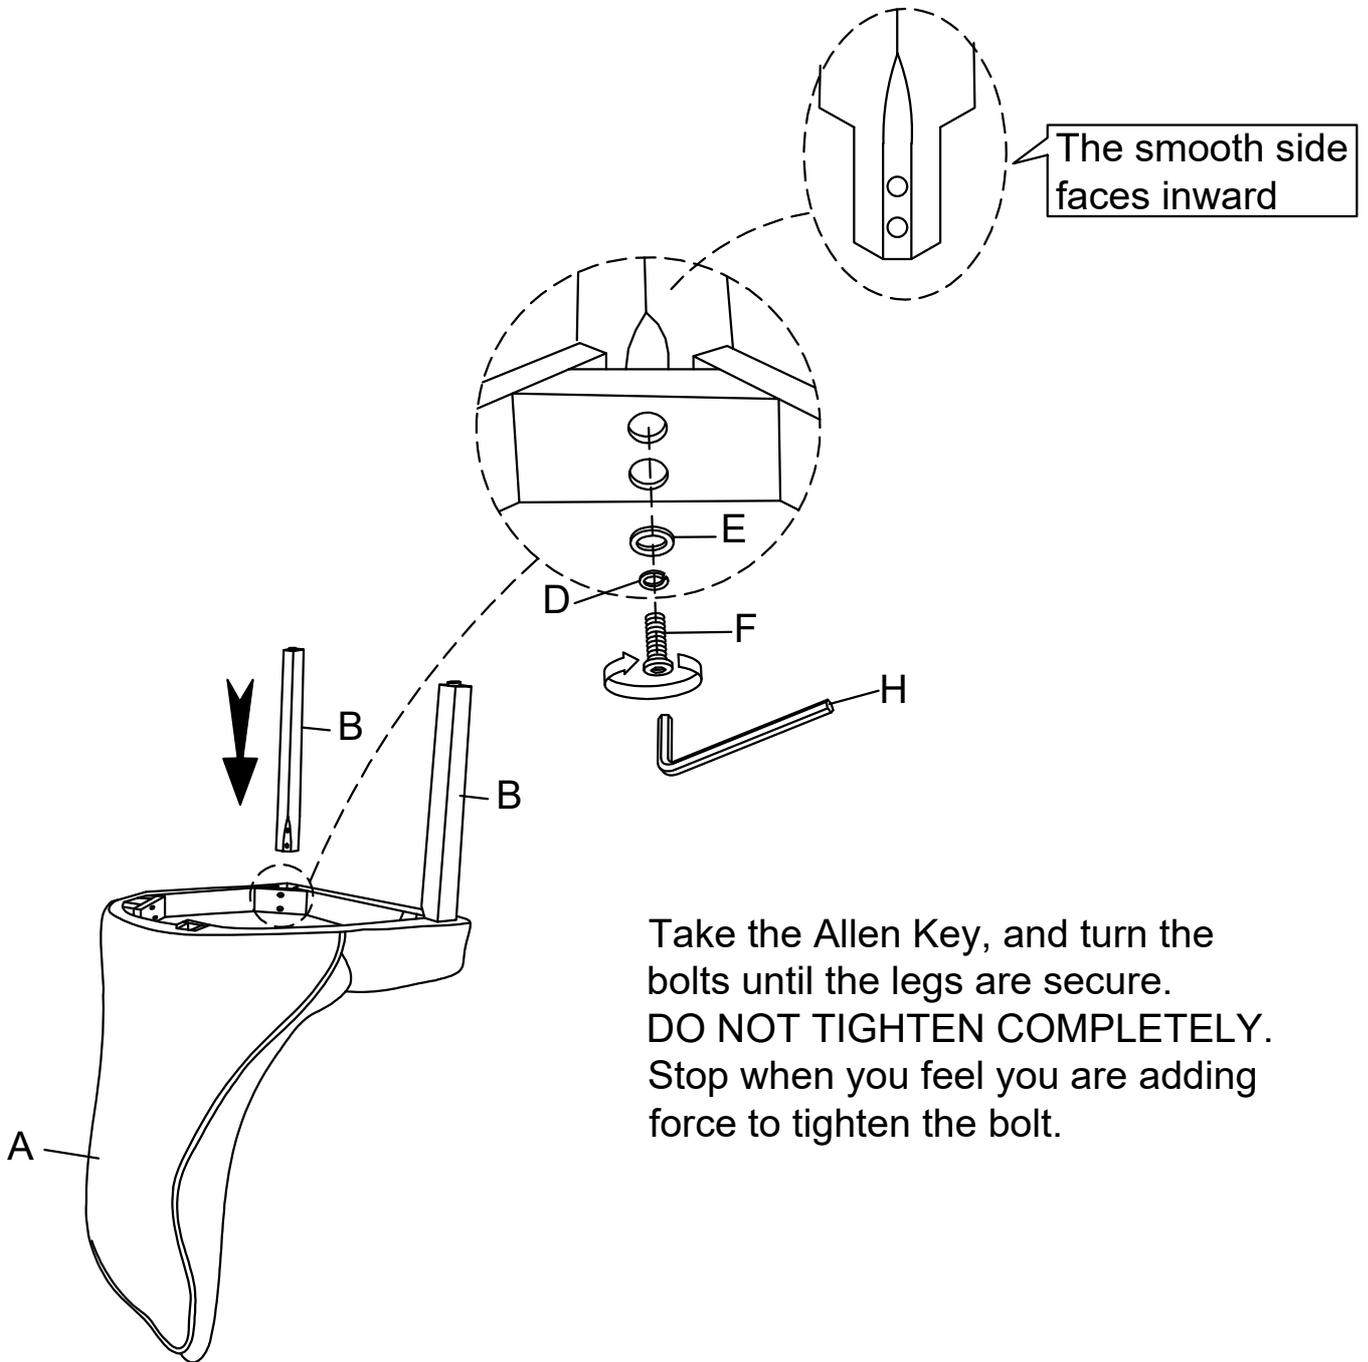

Take the Allen Key, and turn the bolts until the legs are secure. **DO NOT TIGHTEN COMPLETELY.** Stop when you feel you are adding force to tighten the bolt.

2 Attach the Back Leg (C) to Chair Body (A) with Lock Washer (D), Flat Washer (E) and Bolt (G) by Allen Key (H).

Stand chair up on an even surface and check that it is balanced. If there is a slight wobble, apply downward pressure in the corner where a leg is uneven. Keeping pressure in that corner, tighten all bolts. If balanced, apply downward pressure evenly in the center and tighten all bolts. Do not over-tighten beyond hole depth.

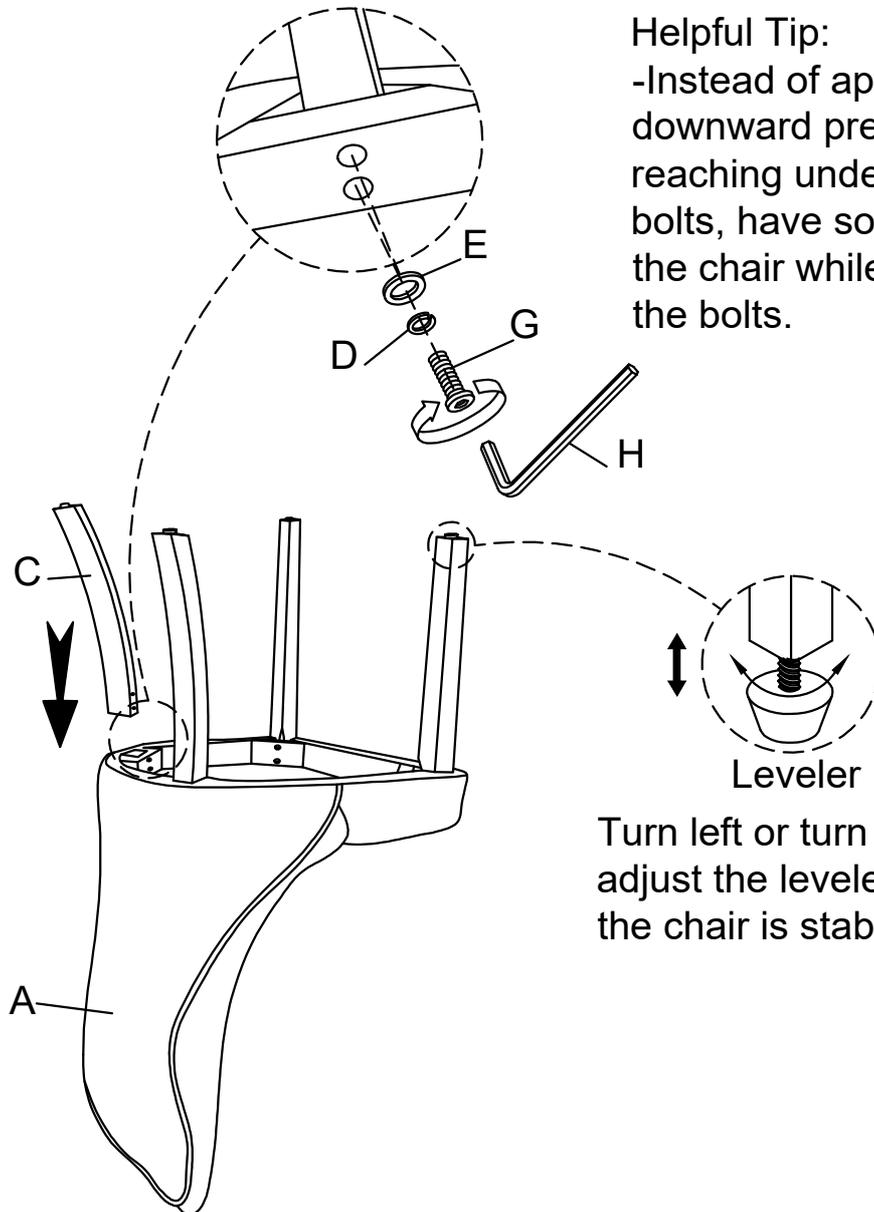

Helpful Tip:
-Instead of applying downward pressure while reaching under to tighten bolts, have someone sit in the chair while you tighten the bolts.

Turn left or turn right to adjust the leveler until the chair is stabilized.

Cleaning & Care

Treat surface with care. Surface is resistant to scratches but is not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.