



Discover the serene sensibilities of Agio™, a tile that artfully depicts the weathered wonder of clay in wilderness-inspired hues. Featuring a wide variety of alluring colors, five sizes, including an on-trend 2" x 47", and three fashion-forward deco's, this collection is sure to enliven any space. Mix and match for endless possibilities for floor and wall designs that soothe the soul.

AGIO™
Glazed Porcelain

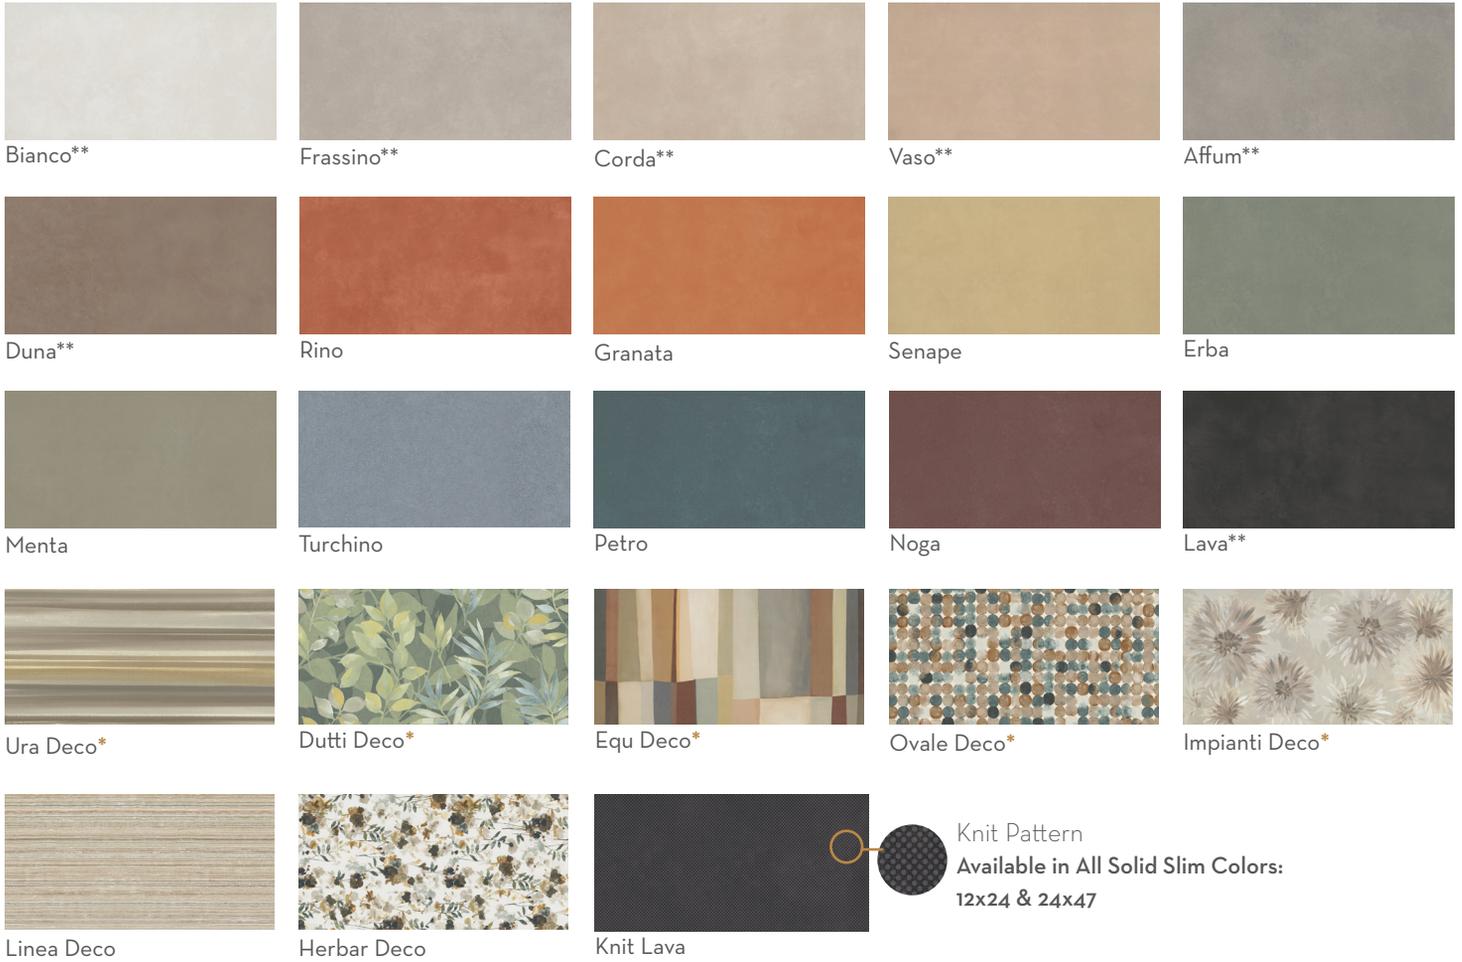



*24"x47" Slim: Dutti Deco, Ovale Deco, Impianti Deco, Equ Deco & Ura Deco

Sizes									
	47" x109" Slim 47.09" x109.25"	47" x47" 47.09" x47.09"	24" x47" 23.50" x47.09"	24" x47" Slim 23.50" x47.09"	24" x24" 23.50" x23.50"	12" x24" Slim 11.71" x23.50"	2" x47" Slim 2.09" x47.09"	1" x6" Stacked Mosaic 12" x12" Mesh 11.75" x11.75"	3" x12" Floor SBN
Thickness	6.5mm	10mm	10mm	6.5mm	6.5mm	6.5mm	6.5mm	6.5mm	Check Website
Faces	6	6	12	12 (Solid) 2 (Decos)	6	N/A	N/A	N/A	N/A
Finish	Matte	Matte	Matte	Matte	Matte	Matte	Matte	Matte	Matte
Edge	Rectified	Rectified	Rectified	Rectified	Rectified	Rectified	Rectified	Rectified	Cut/Rounded
Grout Joint Recommendation	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	1/8"	Check Website
Testing	Abrasion Resistance C1027	Breaking Strength C648	Chemical Resistance C650	Water Absorption C373	DCOF ANSI A1371	Scratch Hardness MOHS	Shade Variation Rating	**47"x47" and 24"x47" 10mm only available in Duna, Lava, Bianco, Frassino, Affum, Corda, and Vaso.	
Results*	Class III	>350	Resistant	<0.5%	>0.42	5	V1		

- Sustainability Attributes**
- Red List Free
 - Health Product Declaration (HPD) provided upon request
 - Product Packaging is 100% recyclable

Product and Installation Details | ANSI A108.02 Section 4.3.8.2 - For running bond/brick joint patterns utilizing tiles (square or rectangular) where the side being offset is greater than 18" (nominal dimension), the running bond offset will be a maximum of 33% unless otherwise specified by the tile manufacturer. If an offset greater than 33% is specified, specifier and owner must approve mock-up and lippage.



*For more information visit www.emser.com. Always consult a professional for proper usage and installation.

