JascoPro Series Wi-Fi In-Wall Emergency Smart Switch



JASC



4.13in.

Specifications

Power: 120VAC, 60Hz Signal Frequency: 2.4GHz Maximum Load: 1200W Incandescent, 1/2HP Motor 1800W (15A Resistive) Range: Up to 100 feet from router Operating Temperature: 32-104° F (0-40° C) Warranty: 10-year limited, nontransferable product warranty

Requires neutral wire. Switch must be mounted indoors

Design Features

- QuickFit improved components reduce the housing depth by up to 20% compared to previous Wi-Fi models and eliminated the need for heat tabs
- SimpleWire auto-sensing line-load terminals support fast installation by detecting line and load wires and configuring the switch accordingly. Dual ground ports support daisychaining in multi-switch setups
- Requires 2.4GHz Wi-Fi compatible with single-, dual- and tri-band rounters
- Free JascoPro Series app no hub required
- \cdot Effortless Wi-Fi setup and control
- Mobile or voice control works with Amazon Alexa and Google Assistant
- Turn ON/OFF the connected device manually or with the JascoPro Series app
- Emergency Flash flashing lights indicate location to first responders
- Integrated button activates Emergency Flash


- May be used in single-pole installations and with up to four JascoPro Series add-on switches or an existing 3-way switch
- Works with all LED, CFL, incandescent and halogen bulbs
- · Blue LED indicates automatic or manual paring mode status
- · LED can serve as status indicator, guide light, always ON or disabled
- Can be included in multiple groups, scenes and automations
- · Double-tap and triple-tap scene activation directly from device
- Screw terminal installation requires wiring connections for line (hot), load, neutral and ground. Traveler wire required for multi-switch installation
- Over-the-air (OTA) updatable firmware and app updates ensure the latest features are always available
- Uses a standard rocker wallplate not included
- · In-line traveler circuit protection

Installation Recommendations:


- \cdot Insert wire into port and tighten screw. Do not wrap wire around screw
- \cdot Indoor use only
- \cdot Wallplates sold separately
- · Trilingual Instruction manual (English, French, Spanish)




Single-Location Wiring



Space-Saving Screw Terminals



Multi-Location Wiring

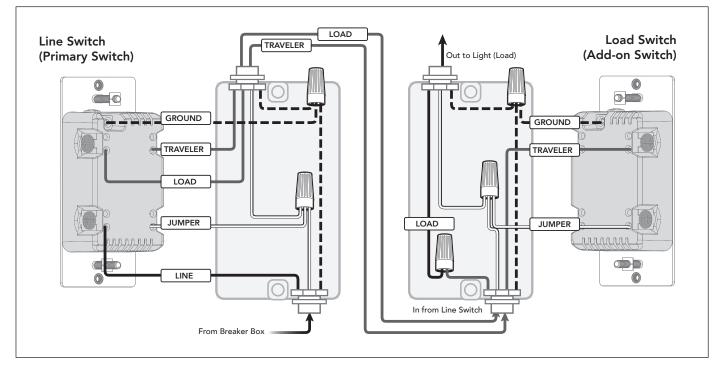

Certifications & Compliances



Compliances, specifications and availability are subject to change without notice.



10 E. Memorial Rd., Oklahoma City, OK 73114. Questions? Contact our U.S.-based dedicated support at 1-833-981-0170, M-F, 7AM-8PM Central Time.

Distributed by Jasco Products Company LLC