

PCA® Perlator®

Laminar Stream - 1.8 gpm max

Pressure Compensating Regular Size



Features and Benefits

- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Provides a splash-free, crystal clear (non-aerated) stream.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Recommended for use in healthcare facilities to prevent mixing air and water.
- ▶ Integrated anti-liming honeycomb replaces conventional wire mesh screens prone to lime build up.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Compatible with regular and vandal proof M22 & M24 metric housings.
- ▶ Available housing finishes: chrome, polished brass, brushed nickel and oil rubbed bronze.
- ▶ Laser marked housings with statutory marks.

Certifications

ANSI/NSF®-61-372
 ASME A112.18.1M and CSA B125 (pending)
 Meets **CALGreen** requirements
 Complies with CEC Amendment to CCR Title 20, section 1605.3

Thread & Part Number

Part #	Designation	Thread Size
14 935	Insert only	
14 900	Regular male	15/16"-27
14 910	Regular female	55/64"-27
14 920	Regular dual thread	15/16"-27 x 55/64"-27
14 904	Vandal proof regular male	15/16"-27
14 914	Vandal proof regular female	55/64"-27
14 926	Vandal proof regular dual thread	15/16"-27 x 55/64"-27

Other product combinations available.



Packaging:

Inserts 1 pc (bag), 6 pcs (tube), 50 pcs (bag)
 Reg. male/female/dual thread 1 pc (bag), 6 pcs (tube), 50 pcs (tray)
 Reg. vandal proof male/female/dual thread 1 pc (bag), 6 pcs (tube), 40 pcs (tray)

Color Code

Dome	Flow Regulator	Basket
Clear	Light Blue	Light Gray

Flow Rate Curve

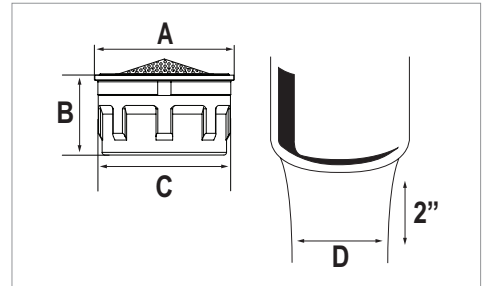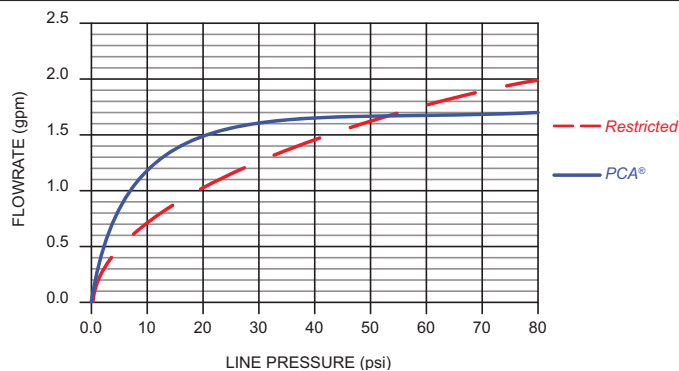

Dimensions

No	mm	In
A	20.88	.822
B	12.00	.472
C	19.97	.786
D	≈ 13	≈ 1/2


Housings



Technical Data

Materials: Body Acetal
 O-ring EPDM
 Washer EPDM

Continuous



Short-term (5 minutes max.)

Per ASME A112.18.1 testing requirements.

