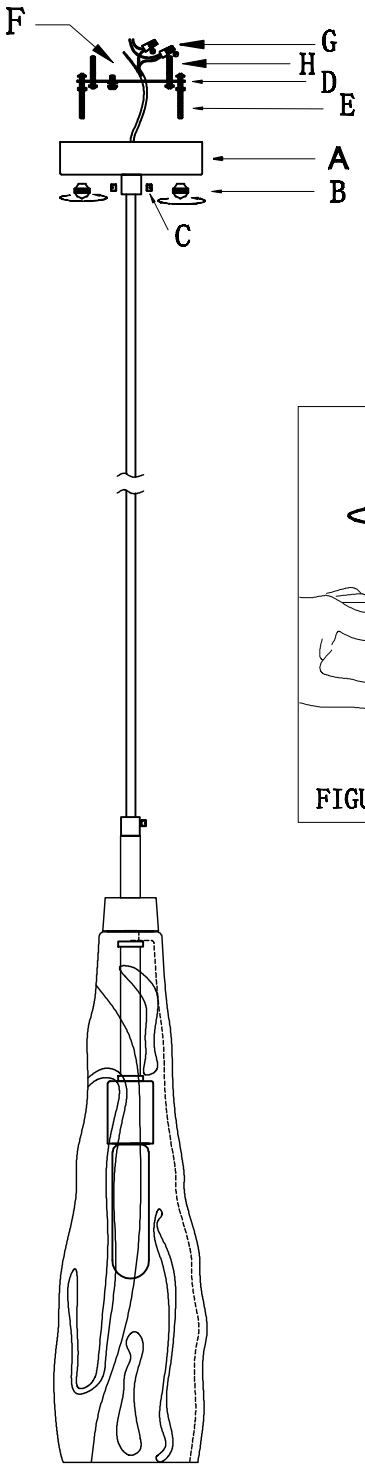
John-Richard

Item NO.: AJC-9023



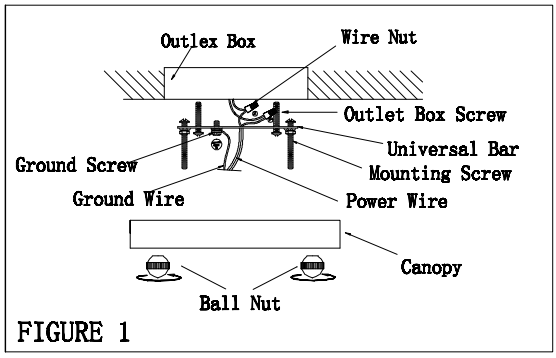


FIGURE 1

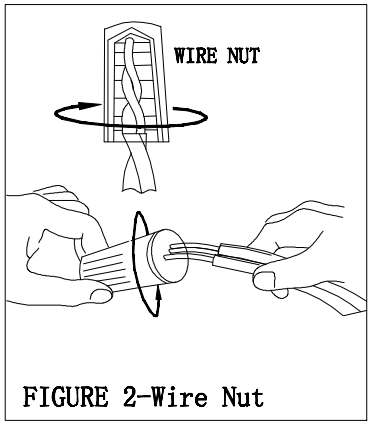


FIGURE 2-Wire Nut

John-Richard

STYLE NO.:AJC-9023

Parts and Hardware List

A.	Ceiling Assembly	1PC
B.	Ball Nut	2PCS
C.	plastic screws	2PCS
D.	Universal Bar	1PC
E.	Mounting Screw	2PCS
F.	Green Ground Screw	1PC
G.	Wire Nut	3PCS
H.	Outlet Box Screw	2PCS

Please make sure that you have all the parts indicated before you begin assembling this item.

Please read Wiring Instructions before you begin assembling and installing your Ceiling Lamp. NOTE: BRAIDED CORD COVER FRAYS EASILY, if plastic screws (C) are not loosened before adjusting hang height, cord cover will fray.

WARNING: BEFORE INSTALLING, make sure the electricity supply is shut off to avoid a possible electric shock.

Assembly Instruction

1. Take the parts carefully out of the carton, place them on a flat surface, and make sure that the parts will not be damaged.
2. Remove the Ball Nuts(B) under the Canopy from the Mounting Screws(E), and take out the Universal Bar(D). Attach the Universal Bar(D) to the Outlet Box by using two Outlet Box Screws(H). (See Figure1)
3. Install the ground wire in the Universal Bar(D) with the supplied Green Ground Screw(F).
4. Loosen plastic screws(C) and adjust desired hang height by carefully pulling braided cord through canopy.Tighten plastic screws. NOTE:BRAIDED CORD COVER FRAYS EASILY,if plastic screws(C) are not loosened before adjusting hang height,cord cover will fray.
5. Place the null wire, ribbed wire evenly against the ribbed wire from the Outlet Box and place the live wire, smooth wire evenly against the smooth wire from the Outlet Box. (Connecting the Wires-See Figure 2)
6. After the wires are connected, tuck them carefully inside the Outlet Box. Attach the Ceiling Assembly(A) to the Mounting Screws(E) and secure with two Ball Nuts(B). (See Figure 1)
7. Install the 1*60 Watt bulb into the socket of the fixture.

To clean,wipe with soft dry cloth.

NOTE: THE DRAWING OF THE LAMP BODY IS FOR REFERENCE ONLY.

John-Richard

STYLE NO.:AJC-9023

Parts and Hardware List

A.	Ceiling Assembly	1PC
B.	Ball Nut	2PCS
C.	plastic screws	2PCS
D.	Universal Bar	1PC
E.	Mounting Screw	2PCS
F.	Green Ground Screw	1PC
G.	Wire Nut	3PCS
H.	Outlet Box Screw	2PCS

Please make sure that you have all the parts indicated before you begin assembling this item.

Please read Wiring Instructions before you begin assembling and installing your Ceiling Lamp.

WARNING: BEFORE INSTALLING, make sure the electricity supply is shut off to avoid a possible electric shock.

Assembly Instruction

1. Take the parts carefully out of the carton, place them on a flat surface, and make sure that the parts will not be damaged.
2. Remove the Ball Nuts(B) under the Canopy from the Mounting Screws(E), and take out the Universal Bar(D). Attach the Universal Bar(D) to the Outlet Box by using two Outlet Box Screws(H). (See Figure1)
3. Install the ground wire in the Universal Bar(D) with the supplied Green Ground Screw(F).
4. Loosen plastic screws (C) and adjust desired hang height by carefully pulling braided cord through canopy. Tighten plastic screws. NOTE: BRAIDED CORD COVER FRAYS EASILY, if plastic screws (C) are not loosened before adjusting hang height, cord cover will fray.
5. Place the null wire, ribbed wire evenly against the ribbed wire from the Outlet Box and place the live wire, smooth wire evenly against the smooth wire from the Outlet Box. (Connecting the Wires-See Figure 2)
6. After the wires are connected, tuck them carefully inside the Outlet Box. Attach the Ceiling Assembly(A) to the Mounting Screws(E) and secure with two Ball Nuts(B). (See Figure 1)
7. Install the 1 *60 Watt bulb into the socket of the fixture.

To clean,wipe with soft dry cloth.

NOTE: THE DRAWING OF THE LAMP BODY IS FOR REFERENCE ONLY.