
READ THIS FIRST AND STORE PROPERLY FOR FUTURE USE!

cybex
PLATINUM



SOLUTION T BOOSTER

Owner's Manual

Read this Owner's Manual carefully before first use and store it for future reference in the pocket behind the Backrest pad (see page 19).

Introduction 4
Registration/Recall Information 6
Certification 7
Child Usage Guidelines 8
Warnings 11
Overview of the SOLUTION T Booster Seat 19
Assembly 20
Product Features
Adjustable Headrest 21
Linear Side-impact Protection (L.S.P.) 22
Reclining Headrest 23
Installing the SOLUTION T Booster 24
Adjusting the Booster for Your Child 26
Securing the Child 27
Uninstalling the Booster 31
Removing and Replacing Seat Covers 32
Care and Cleaning 37
Safety Checklist 38
Resources 39
CYBEX Warranty 40

Introduction

Welcome to CYBEX! We're thrilled you chose the CYBEX SOLUTION T booster seat. Crafted with German engineering excellence, this product is now available in the United States. We are confident it will provide safer, more comfortable travel for your child and make installation and use effortless for you.

According to the U.S. National Highway Traffic Safety Administration (NHTSA), car seats and boosters provide protection for infants and children in a crash, yet car crashes are a leading cause of death for children.

Statistics show that over 75% of Child Restraints are being used incorrectly!

CYBEX recommends keeping your young child in a properly sized and installed car seat as long as possible before making the switch to the SOLUTION T booster seat.

Please read and follow these instructions carefully to install the CYBEX SOLUTION T booster seat correctly, even if the installation and use of this booster seat might seem simple and intuitive. No booster seat can guarantee protection from injury in every situation, but proper use helps reduce the risk of death or serious injury. If you have any questions or need assistance, please contact CYBEX Consumer Services at 1-877-242-5676.

Before the first use of this booster seat, please make sure you have completed all the steps in the Safety Checklist on page 38.

Also, please remember to register your booster seat so we can contact you in the unlikely event of a recall. Register online at https://register.cybex-online.com/us/carseat in the United States.

Keep this Owner's Manual for future reference by storing it in the pocket behind the Backrest pad. We appreciate your purchase and invite you to visit www.cybex-online.com to see other great CYBEX products.

For step-by-step installation video, scan this QR Code:

Registration/Recall Information

Please complete the Registration Card that came with your booster seat and mail it immediately or register online.

Booster seats could be recalled for safety reasons. You must register this restraint to be reached in a recall. Send your name, address, e-mail address (if available), and the restraint's model number and manufacturing date* to:

Columbus Trading-Partners USA Inc.
Attn: CYBEX Consumer Services
PO Box 410127
Charlotte, NC 28241-9905, USA

You may also call CYBEX Consumer Services at 1-877-242-5676, or register online at https://register.cybex-online.com/us/carseat

For recall information, call the U.S. Government's Vehicle Safety Hotline at 1-888-327-4236 (TTY: 1-800-424-9153), or go to www.NHTSA.gov

* Registration information may be found affixed to the underside of the Booster Base.

FEDERAL STANDARD NO. FMVSS 213B
BOOSTER SEAT SYSTEMS

This booster seat system conforms to all applicable Federal motor vehicle safety standards.

This restraint is certified for use only in passenger and multi-purpose passenger motor vehicles, buses, and trucks equipped with lap and shoulder belt systems.




This restraint is not certified for aircraft use as shoulder belts are not available for proper use.

⚠ WARNING! DEATH or SERIOUS INJURY can occur.

- **USE ONLY WITH CHILDREN WHO WEIGH BETWEEN 40 AND 120 POUNDS (18 AND 54 KG), AND WHOSE HEIGHT IS BETWEEN 43.3 AND 60 INCHES (110 AND 152 CM), AND WHO ARE 4 YEARS OF AGE OR OLDER**. Using this booster seat with a child who does not meet **all** of these requirements may increase the risk of death or serious injury.
- **Use** this booster seat **forward facing only**.

Booster seats raise the child up and help to position the vehicle lap and shoulder belt correctly. When the child is **properly restrained** in a booster seat, their risk of injury in all types of crashes is reduced. **It is important for the child to sit properly within the vehicle seat belts.** When the vehicle seat belt is buckled:

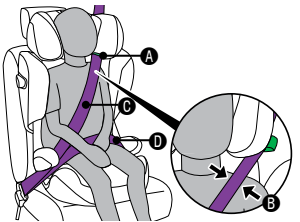

- Position the Shoulder Belt Guide **at** or **just above** the child's shoulders so that the shoulder belt passes through the Shoulder Belt Guide Ⓐ, across the middle of the child's shoulder Ⓑ, and snugly across the midpoint of the child's chest Ⓒ.
- Position the lap belt so it sits low and snug at the child's hips Ⓓ and passes through both Lap Belt Guides.

If the child leans out, moves the belt behind their back, or places it under their arm, **it will not provide the intended restraint**.

Things to consider when deciding whether a child is ready to sit in a booster seat:


- The child's weight and height, and the weight and height rating of their current child seat.
- The child's age and maturity (are they mature enough to sit in the booster seat and not put the belts under their arm or behind their back?).
- The seating positions available in your vehicle.

Using a booster seat is very similar to buckling yourself into the vehicle.


- Read the vehicle owner's manual and the Owner's Manual for the booster seat before you start.
- Put the booster seat in the back seat in a location with a lap and shoulder belt. **Never use a booster seat with a lap belt only**, as this could cause serious injuries.
- After the child is seated in the booster seat, pull the lap and shoulder belt across their body and buckle it, then ensure that the vehicle belts are positioned as shown in "Child Requirements" on pg. 10.

Child Requirements

Do not use this booster seat unless your child meets all of these requirements.



- Weight between 40 and 120 pounds (18 and 54 kg)
- Height between 43.3 and 60 inches (110 and 152 cm)
- 4 years of age or older
- Top of child's ears (red line) must be **below** top of Headrest (blue line)
- Shoulder Belt Guide positioned **at** or **just above** the child's shoulders so that the shoulder belt passes through the Shoulder Belt Guide Ⓐ, across the middle of the child's shoulder Ⓑ, and snugly across the midpoint of the child's chest Ⓒ.
- Lap belt positioned so it sits low and snug at the child's hips Ⓓ and passes through both Lap Belt Guides.

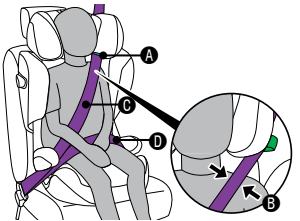

Once your child **exceeds** any of the size requirements above, they **must discontinue** use of this booster seat.

Rigid **lower anchor attachment** is **only** used to stabilize the booster seat on the vehicle seat. The vehicle lap and shoulder belt is required to secure the child in the booster seat.

⚠ WARNING! DEATH or SERIOUS INJURY can occur.

- **Read** this Owner's Manual carefully before first use and keep it for future reference.
- **Follow all instructions** on this product and in the written instructions stored behind the Backrest pad.

General Warnings

- The primary protection for occupants of a vehicle in a collision is the structure of the vehicle itself.
- This booster seat will substantially improve the chances for survival in most crashes if correctly used per the instructions and labeling.
- **Your child's safety** depends on you correctly installing and using this booster seat.
- **Read** and **follow** all booster seat and vehicle instructions carefully. Failure to follow these instructions and the product labeling can result in **death** or **serious injury** of your child in a sharp turn, sudden stop, or crash.
- **Never** install or use this booster seat until you have read and understand the instructions in your vehicle owner's manual, this Owner's Manual, and the labels on the product.

  If there is a conflict between the vehicle owner's manual and this Owner's Manual, contact CYBEX Consumer Services at 1-877-242-5676. Failure to follow these instructions can result in death or serious injury to your child in a crash.

⚠ WARNING! DEATH or SERIOUS INJURY can occur.

- **Do not** allow others to install or use this booster seat unless they understand how to correctly install and use it.
- **Never** allow someone else to use this booster seat without also passing along this manual to them.
- **Do not** use a booster seat with an unknown history.
- **Never use booster seat if it has damaged, broken, or missing parts.**
- **Do not** attempt to make repairs to or otherwise modify or tamper with this booster seat.
- **Always replace the booster seat after a crash of any kind, even if it was unoccupied.** A crash can cause damage to the booster seat that may not be visible.
- This booster seat and the vehicle seat belt can become very hot if left in the sun and can burn your child's skin. **Always check** part surfaces before putting your child in the booster seat.
- **Never** leave an empty booster seat unsecured in your vehicle. This booster seat must always be secured, even when not occupied. An unsecured booster seat could injure vehicle occupants in a sudden stop or crash.
- The Headrest on the vehicle seat that the child faces should be placed in the lowest position. Vehicle seats are regulated by federal motor vehicle safety standards. The seat back that the child faces must not be altered in any way. **Do not** attach or hang additional items from the vehicle


⚠ WARNING! DEATH or SERIOUS INJURY can occur.

seat back that are not approved by the vehicle manufacturer. Items not tested with the vehicle seat could injure the child or interfere with car seat performance.

- The vehicle Headrest **must not interfere** with the booster seat Backrest. See the vehicle owner's manual for adjustment or possible removal of vehicle Headrest.

Location Warnings


- **According to accident statistics,** children are safer when properly restrained in rear vehicle seating positions.



- **Only** place this booster seat **forward facing** in a vehicle seating location allowed by the vehicle manufacturer. To determine allowable seating positions, refer to your vehicle owner's manual for information about vehicle seat belt systems, air bags, side air bags, front passenger side air bags and booster seat installations.
- **Not every location within a vehicle may be safe for the installation of this booster seat.** In fact, some vehicles have no seating position that is safe for the installation of this booster seat. Improper placement of this booster seat within a vehicle will increase the risk of death or serious injury.
- **Do not** use this booster seat in vehicles that do not have lap and shoulder belt systems.

⚠ WARNING! DEATH or SERIOUS INJURY can occur.

- **Only** use this booster seat on **forward-facing** vehicle seats.
- **Never** install this booster seat in vehicle seats that face the rear or side of the vehicle.



- **Only** use this booster seat on vehicle seats with backs that lock into place. In the event of a sudden stop, an unlocked vehicle seat back could prevent this booster seat from protecting your child.
- **Never** use this booster seat on boats, low speed vehicles (LSV), all-terrain vehicles (ATV), golf carts, or any other non-regulated application.

Usage Warnings

- **Only use** with children who weigh between 40 and 120 pounds (18 and 54 kg) **and** whose height is between 43.3 and 60 inches (110 and 152 cm) **and** who are 4 years of age or older.
- **Improper placement** of this booster seat in a vehicle affects the booster seat's performance and can result in **death** or **serious injury**.
- The Backrest of this booster seat **must fit flat** against the vehicle seat back.
- **Never allow** your child to use this booster seat if the vehicle seat back is in a reclined position.
- **No part** of this booster seat should hang over the front of the vehicle seat.
- Warning! Use only the vehicle's lap and shoulder belt system when restraining the child in this booster seat.

⚠ WARNING! DEATH or SERIOUS INJURY can occur.

- **Never use** a locking clip when installing this booster seat.
- **Do not use** this booster seat in a seating position with an airbag unless the vehicle manufacturer specifically allows placement there. If an air bag inflates, it can hit your child with such a great force that it may cause **death** or **serious injury.**
- **Do not secure** this booster seat to the vehicle's **lower anchor attachment** anchors if the seat belt or seat belt buckle is not easily accessible when the booster seat is securely installed or if it negatively impacts the positioning of the seat belt over the child.
- **Never leave** child unattended.
- **Never tend** to your child's needs while driving. Driving while distracted is the cause of many car crashes. Safely stop your vehicle in order to tend to your child.
- **Do not leave** loose objects (e.g. books, bags, etc.) in a vehicle. In the event of a sudden stop, loose objects will become projectiles, potentially causing serious injuries.
- **Do not use** anything to raise this booster seat off the vehicle seat.
- **Never allow** children to play with this booster seat.
- **Do not** allow children to play with vehicle seat belts. A child within reach of a seat belt may become entangled if they pull the seat belt all the way out and wrap the belt around their head, neck, or waist.
- **Never use** a cut, damaged, frayed, or inoperable vehicle seat belt.

⚠ WARNING! DEATH or SERIOUS INJURY can occur.

- **Never use** this booster seat without properly installed fabric covers.
- **Never use** accessories or parts with this booster seat other than those approved by CYBEX. Use of accessories or parts from other manufacturers could alter the performance of the booster seat .

Additional Warnings

- **Register** your booster seat with the manufacturer. This is the best way to reach you in the event of a recall.
- **Discontinue using** this booster seat when it is older than eight (8) years and recycle it. The date of manufacture can be found on a label affixed to the bottom of the Booster Base.

Seat Belt Warnings


- **Always** read your vehicle owner's manual to determine what vehicle belts and retractors are used in your vehicle.
- **Never use** this booster seat with a lap belt only, or with any motorized, door mounted, or inflatable vehicle belts. Your child would not be properly restrained in the event of a crash.
- **Do not** use with lap and shoulder belts with two retractors. If the vehicle seat belts are not routed and fastened correctly, the booster seat may not protect the child in a crash.
- **Do not** use in a vehicle with seat belts that automatically move along the vehicle frame when the door is opened.

⚠ WARNING! DEATH or SERIOUS INJURY can occur.

- **Do not** allow the vehicle seat belt release button to touch the booster seat. Accidental contact may cause the seat belt to release. If necessary, turn the seat belt release button away from the booster seat or move the booster seat to a different location.

LATCH/UAS Warnings

LATCH and **UAS** are acronyms for **Lower Anchors and Tethers for Children** (USA) or **Universal Anchorage System** (Canada), which both refer to a pair of fixed lower anchors (or bars) and a Top Tether Anchor built into vehicles manufactured after September 1, 2002. Your vehicle Owner's Manual may also refer to this system as **ISOFIX** or **LUAS** (Lower Universal Anchorage System).



Lower anchors are located in the crease, or bight, between the vehicle seat back and seat cushion, and, if not visible, will typically be indicated by the symbol as shown.

CYBEX allows the SOLUTION T to be installed in the vehicle center seating position using the two inner lower anchors from the outboard seating positions if your vehicle manufacturer allows it **and** the distance between the lower anchors is exactly 11 in (28 cm). When using the lower anchors, make sure there are no obstructions for the installation.


⚠ WARNING! DEATH or SERIOUS INJURY can occur.

If these conditions cannot be met, use the vehicle lap and shoulder belt for installation in the center position.

- The **child restraint anchorage system** system is intended to be used **only** as described in these instructions. Refer to your vehicle owner's manual for lower anchor bar positions in your vehicle.
- In addition to these instructions, read and follow your vehicle owner's manual regarding installation of the booster seat and **child restraint anchorage system**. If there is a discrepancy, follow your vehicle owner's manual.
- **Only** use **rigid lower anchor attachment** for securing the booster seat to the vehicle lower anchor bars.

MAIN VIEW


1. Adjustable Headrest
2. Reclining Headrest
3. Headrest Height Adjuster
4. Shoulder Belt Guide
5. Linear Side-impact Protection (L.S.P.)
6. Lap Belt Guide
7. Rigid Lower Anchor Attachment
8. Rigid Lower Anchor Attachment Release Button
9. Rigid Lower Anchor Attachment Indicator
10. Adjustment Handle
11. Booster Base
12. Armrest
13. Owner's Manual Storage Compartment (behind Backrest pad)
14. Backrest

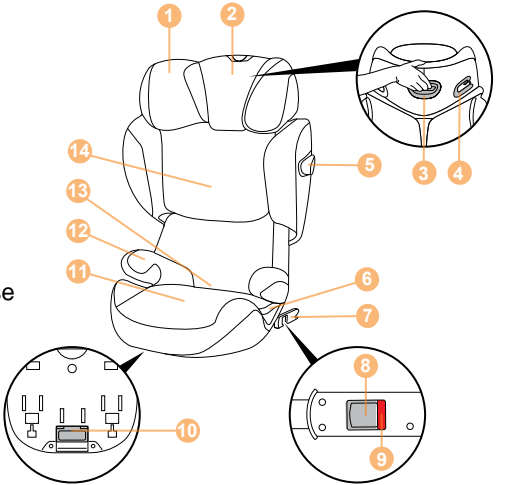

⚠ WARNING! DEATH or SERIOUS INJURY can occur.

- **Never use** the Booster Base without the Backrest attached.
- **Never** use this booster seat with the Backrest past the allowable adjustment range. An audible CLICK will alert you when you have gone too far.


Connect the Backrest to the Booster Base by hooking the guide lug on the axis of the booster. Fold the Backrest up until it CLICKS into place.

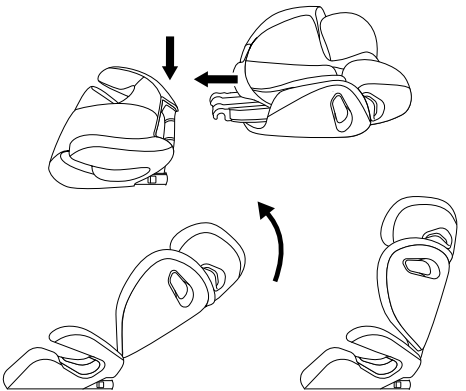


The Adjustable Headrest can be raised or lowered by using the Headrest Height Adjuster at the back of the Headrest.

The innovative size adjustment of the SOLUTION T automatically adjusts the width of the Shoulder Pad as the height of the Headrest is adjusted.

Adjust the Headrest so that no more than 0.8 inches (2 cm) remains between the child's shoulder and the Headrest.

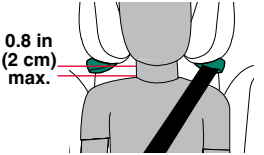

The height of the Headrest can still be adjusted while the car seat is installed in the car.

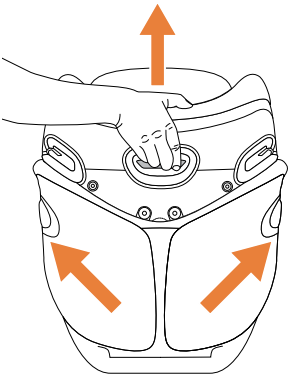

1. To open the Linear Side-impact Protection (L.S.P.) (5) that faces the vehicle door:


Press firmly on the part marked “PRESS”.

2. To close the Linear Side-impact Protection (L.S.P.) (5) not facing the vehicle door:


Slide the L.S.P. backwards and then push it inwards until it locks into place.

3. To fold out the Linear Side-impact Protection (L.S.P.) (5) again, press firmly on the area on the L.S.P. marked with "PRESS".


The car seat can also be used without the L.S.P. in use, if there is not enough space in the vehicle.

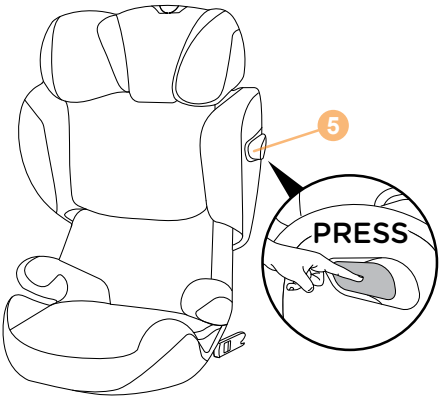

The Reclining Headrest on the SOLUTION T is designed to help prevent your child's head from falling forward, keeping them protected in the event of a crash.

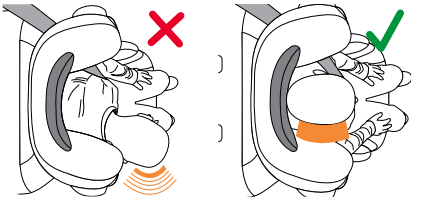

After adjusting the Headrest to the correct height for your child (pg. 21), select the Headrest recline position that is most comfortable for your child by lifting up and moving the Headrest forward or backward as shown.



Installing the SOLUTION T booster seat


Rigid **lower anchor attachment** is **only** used to stabilize the booster seat on the vehicle seat. The vehicle lap and shoulder belt is required to secure the child in the booster seat.


1. Select a seat location allowed by your vehicle manufacturer that is equipped with a **lap and shoulder belt** system.
2. Locate the vehicle lower anchors or the symbols indicating their location (see pg. 17).

   For center seat installations, if the vehicle lower anchors are not exactly 11 inches (28 cm) apart (see pg. 17), Rigid **lower anchor attachment** cannot be used.


   

   If rigid lower anchor attachment is unusable, place the booster seat on the vehicle seat, ensuring that the Backrest is in full contact with the vehicle seat back and does not interfere with the vehicle's Headrest, then proceed to "Adjusting the Seat for Your Child" on page 26, otherwise continue with step 3.
3. Place the booster on its side.
4. Squeeze the orange adjustment handle on the bottom of the Booster Base and pull the rigid **lower anchor attachment** out until they stop.


   
5. Rotate the rigid **lower anchor attachment** 180° as shown.


6. Push the rigid **lower anchor attachment** onto the vehicle lower anchors until you hear them CLICK.



The **green** Indicator bar will be visible on the release button when the rigid **lower anchor attachment** is securely attached to the lower anchors.



Be sure that the rigid lower anchor attachment are secured to the vehicle lower anchors by pulling hard on the booster seat from both sides.



7. While squeezing the Adjustment Handle, push the booster until it rests flat against the vehicle seat back.



8. Release the handle and the booster seat will lock into place, then continue with "Adjusting the Seat for Your Child" on pg. 26.

Adjusting the Seat for Your Child


After the SOLUTION T is properly installed:

Adjust the Headrest Height


1. Squeeze the Headrest Height Adjuster (pg. 21) and raise the Headrest to its highest position.
2. Place your child in the booster seat, making certain they are sitting up straight with their back against the Backrest.
3. Adjust the Headrest so the shoulder belt **lies across the middle of the shoulder** and snug across the midpoint of the child's chest (pg. 8).

⚠ WARNING! DEATH or SERIOUS INJURY can occur.


- **Never use with a lap belt only.**




- **Never allow** your child to place the shoulder belt behind their back.



- **Never allow** your child to place the shoulder belt under their arm.




- **Never allow** the seat belt buckle to be located within the Lap Belt Guide. Refer to the vehicle owner's manual for possible solutions.




Sometimes a longer buckle stalk will interfere with proper belt routing. If this is the case, try a different vehicle seat position.

⚠ WARNING! DEATH or SERIOUS INJURY can occur.


- **Never position** any part of the vehicle seat belt over the top of the Armrests.



- **Never use** with the shoulder belt in contact with your child's neck.




- **Never allow** your child to slide down (slouch) in the booster seat. This could position the lap belt across your child's abdomen and/or cause the shoulder belt to be in contact with your child's neck.




To properly secure your child in the booster:


1. Slip the shoulder belt between the Side Pad and the Headrest, then route the shoulder elt through the **green** Shoulder Belt Guide.




2. Pull the shoulder belt down across your child's chest while guiding the lap belt underneath both Armrests.




3. Buckle the seat belt, making sure the shoulder belt passes underneath the Armrest on the buckle side.



4. Pull up on the shoulder belt to remove any slack.



When your child sits properly in the booster seat:

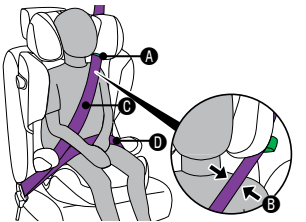



- The Shoulder Belt Guide is positioned **at** or **just above** the child's shoulders so that the shoulderbelt passes through the Shoulder Belt Guide Ⓐ, across the middle of the child's shoulder Ⓑ, and snugly across the midpoint of the child's chest Ⓒ.


  IMPORTANT: If the vehicle belt does not fall across the middle of the shoulder, adjust the Headrest (see pg. 21) to achieve proper belt fit.

- The lap belt is positioned so it sits low and snug at the child's hips Ⓓ and passes through both lap belt guides.
- **Both** the lap and shoulder belt must be underneath the Armrest on the side with the buckle. Pull up on the shoulder belt to remove any slack in the belts.
- If you need to use a blanket in cold weather, secure your child in the booster seat first, and then cover both child and booster seat with the blanket.

1. Unbuckle the vehicle lap and shoulder belt and remove the seat belt from the belt guides.
2. Release the rigid **lower anchor attachments** from the vehicle anchors.
   a. Press both rigid **lower anchor attachments** Release Buttons at the same time Ⓐ.
   b. Pull the rigid **lower anchor attachments** off the vehicle anchors Ⓑ.
3. Rotate the rigid **lower anchor attachments** 180°as shown Ⓒ.
4. Squeeze the gray Adjustment Handle on the bottom of the Booster Base and push the rigid **lower anchor attachments** in until they stop Ⓓ.
5. Remove the booster seat from the vehicle.

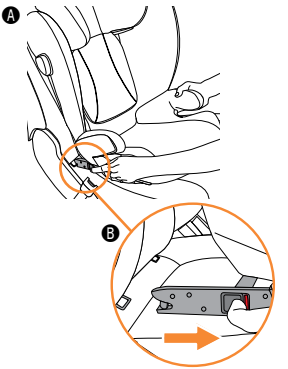







⚠ WARNING! DEATH or SERIOUS INJURY can occur.

- **Never** use this booster seat without properly installed fabric covers.
- **Do not** damage, remove, or dispose of the foam Headrest Pads or Side Pads on this booster. Each foam piece was designed to absorb energy in a crash.

The seat is covered with five separate parts: the Reclining Headrest Pad (1), Headrest Cover (2), Side Pad Cover (3), Backrest Cover (4), and Seat Pad (5). To remove these parts, please follow the instructions below.

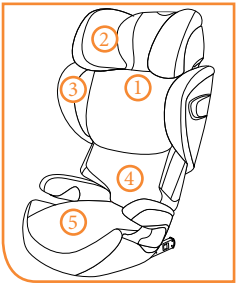




1. Reclining Headrest Pad:

a. From the rear of the seat, release the hook and loop fasteners connecting the Reclining Headrest Pad to the Headrest Cover.

b. From the front of the seat, undo the two snaps securing the underside of the Reclining Headrest Pad to the Side Pad Cover and pull up to remove.


2. Headrest Cover:


Undo the three snaps at the rear of the Headrest Cover and pull the cover forward over both Head Pads to remove.

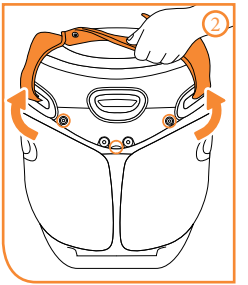

3. Side Pad Cover:

a. Move the Headrest to its highest position.
b. From the rear of the seat, lift up and remove the Side Pad Cover at one corner of the lower seat back and pull toward the front.
c. Untuck the Side Pad Cover from around the silver base of the L.S.P. Bolster and pull the Side Pad Cover toward the front of the seat.
d. Pull the cover off the opposite Side Pad in the same way, then finish removing the cover by pulling it toward the back of the seat.

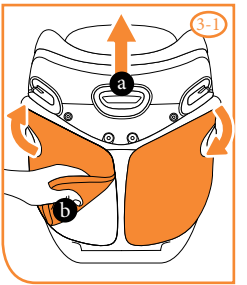


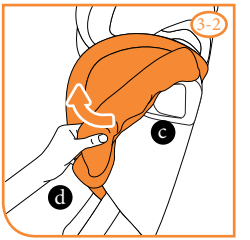


Removing and Replacing Seat Covers

4. Backrest Cover:

Remove the bottom corners of the Backrest cover from the slots on the rear of the seat and pull the Backrest Cover off the seat back.



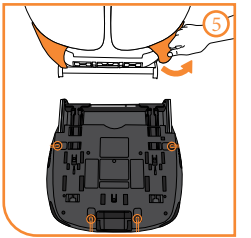


5. Seat Pad:

Undo the snaps at the bottom rear corners of the Seat Pad. Disconnect the elastic bands from the underside of the seat and remove the Seat Pad.

REPLACING THE FABRIC COVERS


1. Seat Pad:


Install the Seat Pad to the seat and secure the elastic bands on the underside of the seat. Secure the snaps at the bottom rear corners of the Seat Pad to the seat base.

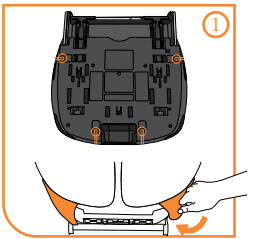

2. Backrest Cover:

From the front of the seat, wrap the Backrest Cover over the seat back and tuck the bottom corners into the slots at the rear of the seat.






3. Side Pad Cover:

a. With the Headrest in its highest position, pull the Side Pad Cover on over one Side Pad at a time, making sure to support the base of the foam pad as you do.

ⓘ Make sure that the green belt guide always remains visible above the seat cover.

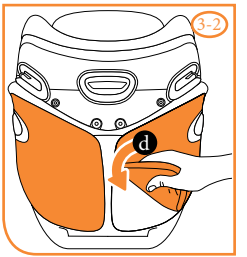


b. Tuck the edges of the Side Pad Cover around the silver base of the L.S.P. Bolster on each Side Pad.

c. Pull the Side Pad Cover around to the back side of the seat and wrap around the edges of the lower seat back to secure.


4. Headrest Cover:

Pull the Headrest Cover on over the Headrest Pads, one side at a time, making sure to support the base of the foam pad as you do, and secure the three snaps at the rear of the Headrest Cover.

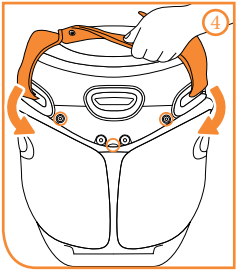

5. Reclining Headrest Pad:

a. Slide the Reclining Headrest Pad onto the Reclining Headrest, taking care to tuck the edges securely under the silver handle at the top of the headrest.
b. Secure the hook and loop fasteners at the rear of the pad to the Headrest cover.
c. Secure the two snaps on the underside of the Reclining Headrest Pad through the loops on the Side Pad Cover.



Never use bleach, household cleaners, or solvents. **Do not** use lubricants of any kind.

Spot Cleaning

Spot clean the fabric seat covers as needed with a clean cloth using mild detergent and water.

Fabric Seat Covers 

- Machine wash separately, warm water, delicate cycle.
- **Air dry only.**

  Do not dry in the dryer or in direct sunlight.
- **Do not** iron.
- **Do not** dry clean.

Plastic and Metal Parts

Wipe clean with mild detergent and cold water.

Replacement Seat Covers

In the event you need to replace your seat covers, please contact us in the US and Canada at 1-877-242-5676 to purchase a new fabric set. Keep in mind that colors and styles change each year, so your current color might not be available.

Safety Checklist

- Did you read and understand the vehicle owner's manual, this Owner's Manual, and all labels found on this booster seat?
- Is your child 4 years of age or older AND do they weigh 40 - 120 pounds (18 - 54 kg) AND stand 43.3 - 60 inches (110 - 152 cm) tall?
- Is the booster seat forward-facing in a seating position with a lap and shoulder belt?
- Is the booster seat Headrest positioned so the tops of the child's ears are **below the top of the Headrest**?
- If using SOLUTION T rigid **lower anchor attachments** with the vehicle's lower **lower anchor attachments** anchors, are both Indicator bars on the rigid **lower anchor attachments** showing **green**?
- Does the Backrest fit flat against the vehicle seat back in an upright position?
- Is the lap belt under both Armrests?
- Is the **green** Shoulder Belt Guide positioned **at** or **just above** the child's shoulders?
- Is the shoulder belt routed through the **green** Shoulder Belt Guide?
- Does the shoulder belt lie across the middle of the shoulder and snug across the midpoint of the child's chest?
- Does the lap belt lie low and snug on your child's hips?
- Are the lap and shoulder belts snug, not twisted, and with no slack?
- Did you check for hot surfaces?
- Is today's date before the "Expires On" date on the booster seat?
- If you answered **yes** to all of these questions, you are good to go, and please **drive safely**!

Installing your booster seat correctly in your vehicle is extremely important for your child's safety. However, it is not always easy to do. **Statistics show that over 75% of Child Restraints are being used incorrectly!**

CYBEX has many trained CPSTs (Child Passenger Safety Technicians) on staff. Please contact us with any questions or concerns about installation, parts, maintenance, or warranty information.

- **Phone:** 1-877-242-5676 (toll-free)
- **E-mail:** info.us@cybex-online.com
- **Web:** www.cybex-online.com
- **Video Appointment:** https://www.cybex-online.com/en/us/virtual-cpst-car-seat-install.html

When you contact us, please have the Model Number and Manufactured on Date ready so that we may help you efficiently. This information can be found on the registration card or on the underside of the Booster Base.

You can also make sure your CYBEX SOLUTION T is installed correctly by selecting the "Find a Tech" link at https://cert.safekids.org and contacting a certified CPS Technician.

Once your seat has reached its expiration date, we recommend recycling the seat. Contact your local recycling center for the best way to dispose of your seat. We do not recommend giving or selling the seat to anyone, or simply putting it in the garbage.

LIMITED WARRANTY

CYBEX warrants to the original consumer purchaser that this product will be free from defects in material and workmanship for two (2) years from the date of original purchase (the "Warranty Period"). During the Warranty Period, CYBEX, at its option, may repair or replace this product if it is found by the manufacturer to be defective in material or workmanship. CYBEX reserves the right to discontinue or change parts, fabrics, models, or products, or to substitute this product with a comparable model or product. To make a claim under this warranty, please contact us at info.us@cybex-online.com, call us at 1-877-242-5676, or write to us at:

CYBEX Warranty
Columbus Trading-Partners USA Inc.
2915 Whitehall Park Drive, Suite 300
Charlotte, NC 28273 USA

An original receipt is required to validate your warranty and shipping charges will be the responsibility of the original consumer purchaser. To expedite the processing of any future warranty claims and to verify the original date of purchase, please complete and mail the pre-addressed owner registration card within thirty (30) days of purchase.

WARRANTY LIMITATIONS

This warranty does not cover the effects of normal wear and tear or damages resulting from negligence, modification, improper installation, accidents, misuse or abuse of this product. It is expressly agreed that the obligations of CYBEX and the original consumer purchaser's remedies under the limited warranty contained herein are exclusive and are strictly limited to the repair or replacement of the product. This limited warranty is conditional upon strict compliance with the provisions of the Owner's Manual. In no event will CYBEX or the dealer selling this product be liable to you for any damages, including incidental or consequential damages, arising out of the use or inability to use this product.

LIMITATION OF WARRANTIES AND STATE/PROVINCIAL LAW RIGHTS:

The warranty and remedies as set forth above are exclusive and in lieu of all others, oral or written, express or implied. To the extent permitted by applicable law, any implied warranties, including implied warranties of merchantability and fitness for a particular purpose, are hereby disclaimed. Some states/provinces do not allow limitations as to how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you. This warranty gives you specific legal rights, and you may have other rights, which vary from state/province to state/province. Neither CYBEX nor the dealer selling this product has authorized any person to create for it any other warranty, obligation, or liability in connection with this product.

CYBEX Industrial Limited
Suite 1222, 12/F | Leighton Centre | 77 Leighton Road | Causeway Bay | Hong Kong
www.cybex-online.com

Distributed in the United States by Columbus Trading Partners USA Inc.
2915 Whitehall Park Drive, Suite 300 | Charlotte, NC 28273 | USA
Tel: 1–877–242–5676 | *e*-mail: info.us@cybex-online.com | www.cybex-online.com

© 2025 CYBEX Industrial Limited. All rights reserved. Printed in China.
This product and its components are subject to change without notice.
Patents pending.

CY_172_2213_f